BEOVIĆ

Schlemmer
Our Technology.Your Success.



Katalog/Catalog

Hrvatski/English

- Zaštita/Protection
- Spajanje/Connection
- Zrak i tekućine/Air & Fluid
- Mehatronika/Mechatronic
- Tokareni dijelovi/Turning Parts

www.schlemmer.com
www.beovic.hr

Sustavi zaštite / Protection Systems

Rebraste cijevi	Corrugated Tubes	2.1
Zaštitne cijevi + cijevne uvodnice	Protection Tubes + Tube Glands	2.2
Razdjelnici + zaštitni pokrovi za utikače	Manifolds + Connector Interfaces	2.3
Zaštita od tekstila	Textile Protection	2.4
Pribor	Accessories	2.5
Plastični brizgani dijelovi	Plastic Injection Molding	2.6

Cijevi rebraste

		stranica
Pregled		
Cijevi + pribor		4 - 5
Svojstva		6 - 7
Profili		8
Cijevi rebraste		
Poly-Tyl (LD-PE)	Standardni profil	9
PA 12	Standardni profil	10
PP	Standardni profil	11
	AHW (Automotive High Wave)	11
	High Flex	11
	UFW (Ultra Flat Wave)	11
PP GM	Standardni profil	12
	AHW (Automotive High Wave)	12
	High Flex	12
	UFW (Ultra Flat Wave)	12
PA 6 HB	Standardni profil	13
	UFW (Ultra Flat Wave)	14
	Lagane	15
	Teške / grube	16
PA 6 VO	Standardni profil	17
	UFW (Ultra Flat Wave)	18
PP-BS	Standardni profil	19
	AHW (Automotive High Wave)	19
	High Flex	19
	UFW (Ultra Flat Wave)	20
	JIS (Japanese Industrial Standard)	20
PPmod	Standardni profil	21
	AHW (Automotive High Wave)	21
	UFW (Ultra Flat Wave)	21
PAER	Standardni profil	22
	AHW (Automotive High Wave)	22
	High Flex	22
	UFW (Ultra Flat Wave)	22
TPE (Hytrel)	Standardni profil	23
TPC (Permaflex)	Standardni profil NOVO	24
TPC-EE (Arnitel)	Standardni profil	25
	AHW (Automotive High Wave)	25
	UFW (Ultra Flat Wave)	25
TPC-ES (Arnitel C)	Standardni profil	26
	UFW (Ultra Flat Wave)	26
ETFE TOP 200	Standardni profil	27
PFA TOP 240/250/260	Standardni profil	28
Schlemmer Gigant	NW 70 + NW 95	29
Specijalne rebraste cijevi		
Samozatvarajuće		30
Zabravljujuće		31
Otporne na glodavce		32
Polyflex Twin NOVO	PA6 HB	33
	PA6 VO	34
	PPmod	35
	PP-UV	36
Alati		
Alati za montažu		37
Alati za rezanje		38

Corrugated Tubes

		page
Overviews		
Tubes + Accessories		4 - 5
Characteristics		6 - 7
Profiles		8
Corrugated Tubes		
Poly-Tyl (LD-PE)	Normal profile	9
PA 12	Normal profile	10
PP	Normal profile	11
	AHW (Automotive High Wave)	11
	High Flex	11
	UFW (Ultra Flat Wave)	11
PP GM	Normal profile	12
	AHW (Automotive High Wave)	12
	High Flex	12
	UFW (Ultra Flat Wave)	12
PA 6 HB	Normal profile	13
	UFW (Ultra Flat Wave)	14
	Light	15
	Heavy/Rough	16
PA 6 VO	Normal profile	17
	UFW (Ultra Flat Wave)	18
PP-BS	Normal profile	19
	AHW (Automotive High Wave)	19
	High Flex	19
	UFW (Ultra Flat Wave)	20
	JIS (Japanese Industrial Standard)	20
PPmod	Normal profile	21
	AHW (Automotive High Wave)	21
	UFW (Ultra Flat Wave)	21
PAER	Normal profile	22
	AHW (Automotive High Wave)	22
	High Flex	22
	UFW (Ultra Flat Wave)	22
TPE (Hytrel)	Normal profile	23
TPC (Permaflex)	Normal profile NEW	24
TPC-EE (Arnitel)	Normal profile	25
	AHW (Automotive High Wave)	25
	UFW (Ultra Flat Wave)	25
TPC-ES (Arnitel C)	Normal profile	26
	UFW (Ultra Flat Wave)	26
ETFE TOP 200	Normal profile	27
PFA TOP 240/250/260	Normal profile	28
Schlemmer Gigant	NW 70 + NW 95	29
Special Corrugated Tubes		
Selfclosing		30
Lockable		31
Marten proof		32
Polyflex Twin NEW	PA6 HB	33
	PA6 VO	34
	PPmod	35
	PP-UV	36
Tools		
Assembly Tools		37
Cutting Tools		38

Cijevi + pribor / Tubes + Accessories

poglavlje 2.1 Chapter 2.1

Cijevi rebraste
Corrugated Tubes

Standardne
AHW



UFW (Ultra Flat Wave)



samozatvarajuće
selfclosing



zabravljujuće
lockable



poglavlje 2.2 Chapter 2.2

NH cijevne uvodnice
NH Cable Gland

za standradni profil
for Normal Profile



ravna
straight



90° kutna
90° angle

poglavlje 2.2 Chapter 2.2

SEMI-FAST

za standardni + UFW profil
for normal + UFW Profile



ravna
straight



90° koljeno
90° elbow



kombinirana
Combi

poglavlje 2.3 Chapter 2.3

Razdjelnici
Manifolds




poglavlje 2.3 Chapter 2.3

Zaštitni pokrovi za utikače
Connector Interfaces



poglavlje 2.5 Chapter 2.5

Spojnice
Connectors



ravna
straight

90° kutna
90° angle

poglavlje 2.5 Chapter 2.5

Redukcije
Reducers



---

poglavlje 2.1 Chapter 2.1

Schlemmer Gigant



poglavlje 2.2 Chapter 2.2

Pričvrsnice
Fixings



ravna
straight



90° kutna
90° angle

Spojnica
Sleeve



ravni
straight

Obujmice
Gripping Clamps



---

poglavlje 2.2 Chapter 2.2

Rakkordflex SF



poglavlje 2.2 Chapter 2.2

NH cijevne uvodnice
NH Cable Gland

PG - Metrički
PG - Metric



ravna
straight




90° kutna
90° angle



---

poglavlje 2.2 Chapter 2.2

Rakkord (Vinnylan)



poglavlje 2.2 Chapter 2.2

KSV uvodnice
Special glands KSV


PG - Metrički
PG - Metric



---

poglavlje 2.2 Chapter 2.2


Schlemmer Flex KUW-PVC



Schlemmer Flex K-PVC



Schlemmer Flex KUW-PUR



poglavlje 2.2 Chapter 2.2

LK uvodnice
LK glands

PG - Metrički
PG - Metric





Cijevi + pribor / Tubes + Accessories

poglavlje 2.2 Chapter 2.2

Cijevi metalne / Metal tubes:
MS-B / bare MS-B
MS-DU
MS-PVC-DU



poglavlje 2.2 Chapter 2.2

Cijevna uvodnica Rakkord
Conduit Gland Rakkord



Tip 30
PG - Metrički
PG - Metric



Tip 31
PG



Tip 33
PG



Tip 36
PG - Metrički
PG - Metric



Tip 40
PG - Metrički
PG - Metric



Tip 41
PG



Tip 43
PG



Tip 46
PG - Metrički
PG - Metric

poglavlje 2.2 Chapter 2.2

Cijevi metalne / Metal tubes:
MS-PVC
MS-PU



poglavlje 2.2 Chapter 2.2

Cijevna uvodnica Rakkord
Conduit Gland Rakkord



Tip 30
PG - Metrički
PG - Metric



Tip 31
PG



Tip 33
PG



Tip 36
PG - Metrički
PG - Metric



Tip 40
PG - Metrički
PG - Metric



Tip 41
PG



Tip 43
PG



Tip 46
PG - Metrički
PG - Metric

Cijevna uvodnica FD
Conduit Gland FD

Metrički / Metric



ravna
straight



45° kutna
45° angle



90° kutna
90° angle

poglavlje 2.2 Chapter 2.2

Cijevi metalne / Metal tubes:
Anaconda Sealtite
E.F/H.C./U.I./U.I.G./O.R./
H.T.D.L./N.M.U.A./H.C.X/H.F.X.



poglavlje 2.2 Chapter 2.2

Cijevne uvodnice / Conduit Glands

PG - Metričke / Metric



ravna
straight



45° kutna
45° angle



90° kutna
90° angle



ravna s unutarnjim navojem
straight internal thread



kombinirana
Combi

poglavlje 2.2 Chapter 2.2

Cijevi metalne / Metal tubes:
Rakkord DU (Vinnylan-DU)



poglavlje 2.2 Chapter 2.2

Specijalne uvodnice serije 75
Special gland series 75

PG - Metrički
PG - Metric




Svojstva rebrastih cijevi / Corrugated Tubes Characteristics


materijal material	temperatura temperature	profili profiles	gorivost po FMVSS 302 Inflammability acc. to FMVSS 302	UL 94: UL 94:
Poly-Tyl (LD-PE)	od -40°C do 80°C	Standardni / Normal	< 100 mm/min. / < 100 mm/min.	HB
		Gigant	< 100 mm/min. / < 100 mm/min.	
PA 12	od -40°C do 100°C	Standardni / Normal	< 100 mm/min. / < 100 mm/min.	HB
PP-UV	od -40°C do 100°C	Twin	< 100 mm/min. / < 100 mm/min.	
PP	od -40°C do 105°C	Standardni / Normal	< 100 mm/min. / < 100 mm/min.	HB
		AHW (Automotive High Wave)	< 100 mm/min. / < 100 mm/min.	
		High Flex	< 100 mm/min. / < 100 mm/min.	
		UFW (Ultra Flat Wave)	< 100 mm/min. / < 100 mm/min.	
PP GM	od -40°C do 105°C	Standardni / Normal	samogasivo / selfextinguishing	HB
		AHW (Automotive High Wave)	samogasivo / selfextinguishing	
		High Flex	samogasivo / selfextinguishing	
		UFW (Ultra Flat Wave)	samogasivo / selfextinguishing	
PA 6 HB	od -40°C do 120°C	Standardni / Normal	< 100 mm/min. / < 100 mm/min.	HB
		UFW (Ultra Flat Wave)	< 100 mm/min. / < 100 mm/min.	
		Lagan / Light	< 100 mm/min. / < 100 mm/min.	
		Težak / Heavy	< 100 mm/min. / < 100 mm/min.	
		Gigant	< 100 mm/min. / < 100 mm/min.	
		Twin	< 100 mm/min. / < 100 mm/min.	
PA 6 VO	od -40°C do 120°C	Standardni / Normal	samogasivo / selfextinguishing	VO
		UFW (Ultra Flat Wave)	samogasivo / selfextinguishing	
		Twin	samogasivo / selfextinguishing	
TPU (PUR)	od -40°C do 125°C	Gigant	< 100 mm/min. / < 100 mm/min.	HB
PP-BS	od -40°C do 125°C	Standardni / Normal	samogasivo / selfextinguishing	HB
		AHW (Automotive High Wave)	samogasivo / selfextinguishing	
		High Flex	samogasivo / selfextinguishing	
		UFW (Ultra Flat Wave)	samogasivo / selfextinguishing	
		JIS (Japanese Industrial Standard)	samogasivo / selfextinguishing	
		samozatvarajući / selfclosing	samogasivo / selfextinguishing	
		zabravljujući / lockable	samogasivo / selfextinguishing	
PPmod	od -40°C do 135°C	Standardni / Normal	samogasivo / selfextinguishing	V2
		AHW (Automotive High Wave)	samogasivo / selfextinguishing	
		UFW (Ultra Flat Wave)	samogasivo / selfextinguishing	
		Gigant	samogasivo / selfextinguishing	
		Twin	samogasivo / selfextinguishing	
		samozatvarajući / selfclosing	samogasivo / selfextinguishing	
		zabravljujući / lockable	samogasivo / selfextinguishing	
PAER	od -40°C do 150°C	Standardni / Normal	samogasivo / selfextinguishing	HB
		AHW (Automotive High Wave)	samogasivo / selfextinguishing	
		High Flex	samogasivo / selfextinguishing	
		UFW (Ultra Flat Wave)	samogasivo / selfextinguishing	
		samozatvarajući / selfclosing	samogasivo / selfextinguishing	
		zabravljujući / lockable	samogasivo / selfextinguishing	
TPE (Hytrel)	od -40°C do 150°C	Standardni sa zaštitom od požara / with fire protection	samogasivo / selfextinguishing	–
		Standardni bez zaštite od požara / no fire protection	< 100 mm/min. / < 100 mm/min.	
TPC Permaflex	od -40°C do 150°C	Standardni bez zaštite od požara / no fire protection	< 100 mm/min. / < 100 mm/min.	–
TPC-EE (Arnitel)	od -40°C do 175°C	Standardni / Normal	< 100 mm/min. / < 100 mm/min.	–
		AHW (Automotive High Wave)	samogasivo / selfextinguishing	
		UFW (Ultra Flat Wave)	samogasivo / selfextinguishing	
TPC-ES (Arnitel C)	od -40°C do 175°C	Standardni / Normal	< 100 mm/min. / < 100 mm/min.	–
ETFE-TOP 200	od -40°C do 200°C	Standardni / Normal	samogasivo / selfextinguishing	VO
PFA-TOP 240	od -40°C do 240°C	Standardni / Normal	samogasivo / selfextinguishing	VO
PFA-TOP 250	od -40°C do 250°C	Standardni / Normal	samogasivo / selfextinguishing	VO
PFA-TOP 260	od -40°C do 260°C	Standardni / Normal	samogasivo / selfextinguishing	VO

Svojstva rebrastih cijevi / Corrugated Tubes Characteristics

materijal material	savitljivost flexibility	mehanička zaštita mechanical protection
Poly-Tyl (LD-PE)	●●●●●○○ ●●●●●●○	●●●●○○○ ●●●○○○○
PA 12	●●●●●○○	●●●●●●○
PP-UV	●●●○○○○	●●●○○○○
PP	●●●○○○○ ●●●●●●● ●●●●●●● ●●●●●●○	●●●●●○○ ●●●●●●○ ●●●●●●● ●●●●●●●
PP GM	●●●●●○○ ●●●●●●● ●●●●●●● ●●●●●●○	●●●●●○○ ●●●●●●○ ●●●●●●● ●●●●●●○
PA 6 HB	●●●○○○○ ●●●●○○○ ●●●●●●● ●●○○○○○ ●●○○○○○ ●●●○○○○	●●●●●●● ●●●●●●● ●●●○○○○ ●●●●●●● ●●●●●●● ●●●○○○○
PA 6 VO	●●●○○○○ ●●●●○○○ ●●●○○○○	●●●●●●● ●●●●●●● ●●●●●●●
TPU (PUR)	●●●●●●●	●●●●○○○
PP-BS	●●●●●○○ ●●●●●●● ●●●●●●● ●●●●●●○ ●●●●●○○ ●●●●●○○ ●●●●●●○	●●●●●○○ ●●●●●●○ ●●●●●●● ●●●●●●● ●●●●●○○ ●●●●●●● ●●●●●●●
PPmod	●●●●●○○ ●●●●●●● ●●●●●●○ ●●●●●○○ ●●●○○○○ ●●●●●○○ ●●●●●●○	●●●●●○○ ●●●●●●○ ●●●●●●● ●●●○○○○ ●●●●●●● ●●●●●●● ●●●●●●●
PAER	●●●○○○○ ●●●●●○○ ●●●●●●● ●●●●●●○ ●●●○○○○ ●●●●●○○	●●●●●●● ●●●●●●● ●●●●●●● ●●●●●●● ●●●●●●● ●●●●●●●
TPE (Hytrel)	●●●●●○○	●●●○○○○
TPC Permaflex	●●●●●○○	●●●○○○○
TPC-EE (Arnitel)	●●●●●○○ ●●●●●●● ●●●●●●○	●●●○○○○ ●●●●●●○ ●●●●●●○
TPC-ES (Arnitel C)	●●●●●○○	●●●○○○○
ETFE-TOP 200	●●●●●○○	●●●●●○○
PFA-TOP 240	●●●●●○○	●●●●●○○
PFA-TOP 250	●●●●●○○	●●●●●○○
PFA-TOP 260	●●●●●○○	●●●●●○○

Rez na vrhu rebra / Cut on the crest





Sve Schlemmer rebraste cijevi prerezane su na vrhu rebra.

Prednost:
Na taj način izbjegava se oštećenje izolacije vodiča u cijevi.

All Schlemmer corrugated tubes are cut on the crest.

Advantage:
This avoids the abrasion of inside lying wires.

Izvedbe cijevi i pakiranja / Designs:

Jedinice pakiranja:

- kontejner
- koluti
- komadno rezane

Izvedbe cijevi:

- razrezane
- nerazrezane
- perforirane

Materijali:
Dodatni materijali na upit

Package units:

- Container
- Coils (Rings)
- Cutted lengths

Designs:

- Slit
- Unslit
- Perforated

Materials:
Further Materials on request

●●●●●●● = Maximum


Profili rebrastih cijevi / Corrugated Tube Profiles

Standardni profil

- najekonomičnija cijev
- mali vanjski promjer
- upotrebljivi Schlemmer razdjelnici i pribor

Normal

- Most economical tube
- Small outer diameter
- Schlemmer Manifolds and Accessories usable

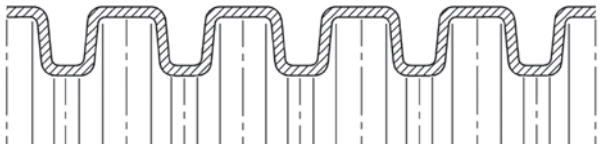


AHW - profil s visokim rebrima za autoindustriju

- visoka otpornost na tlak
- veoma savitljive
- upotrebljivi Schlemmer razdjelnici i pribor

Automotive High Wave

- High pressure strength
- Very flexible
- Schlemmer Manifolds and Accessories usable

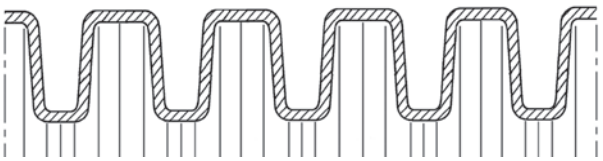


UFW - profil sa izuzetno ravnim rebrima

- ravna unutarnja rebra kao zaštita za vodiče od vibracija
- velika unutarnja dodirna površina
- izvrsna savitljivost kod malih radijusa savijanja
- visoka otpornost na tlak
- upotrebljivi Schlemmer razdjelnici i pribor

Ultra Flat Wave

- Flat inner wave as vibration protection for wires
- Big inner contact surface
- Excellent Flexibility for small bending radii
- High pressure strength
- Schlemmer Manifolds and Accessories usable

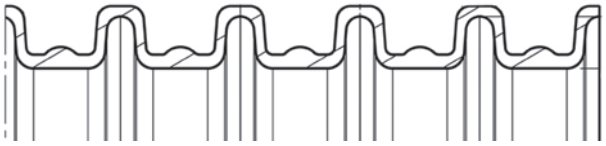


High Flex - profil visoke savitljivosti

- visoka otpornost na tlak
- veoma savitljive
- standardni Schlemmer razdjelnici i pribor nisu upotrebljivi
- poseban pribor na upit

High Flex

- High pressure strength
- Very flexible
- Schlemmer standard Manifolds and Accessories not usable
- Special Accessories on request

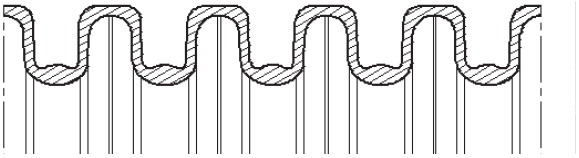


JIS - japanski industrijski standard

- odgovara japanskim industrijskim standardima
- mali vanjski promjer
- svojstva jednaka kao i kod standardnog profila
- standardni Schlemmer razdjelnici i pribor nisu upotrebljivi
- poseban pribor na upit

Japanese Industrial Standard

- Corresponds with Japanese Standards
- Small outer diameter
- Characteristics similar as Normal Profile
- Schlemmer standard Manifolds and Accessories not usable
- Special Accessories on request

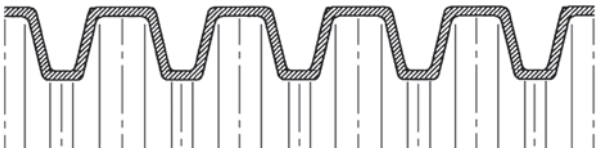


Grubi profil

- visoka otpornost na udarce
- mali radijus savijanja
- visoka otpornost na tlak
- debele stjenke
- upotrebljivi Schlemmer razdjelnici i pribor

Rough

- High impact resistance
- Small bending radius
- High pressure strength
- Thick walled
- Schlemmer Manifolds and Accessories usable

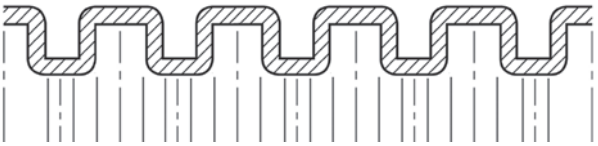


Profil otporan na glodavce

- otporan na ugrize glodavaca
- minimalni otvor razreza
- idealan za rekonstrukcije i popravke
- nije potreban pribor i alati za montažu

Marten proof

- Marten bite proof
- Minimum slit opening
- Ideal for retrofit and repair
- No accessories an assembly tools required

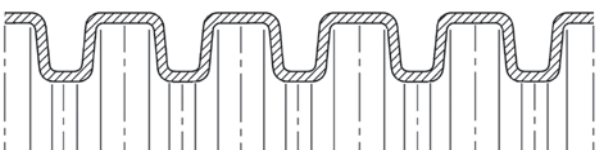


Twin

- dvodjelni, zatvarajući
- visoka otpornost na udarce i istezanje pri niskim temperaturama
- upotrebljivi Schlemmer razdjelnici i pribor

Twin

- Two-piece design, closable
- High low-temperature impact strength and ultimate elongation
- Schlemmer Manifolds and Accessories usable

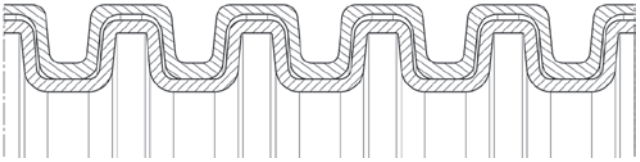

POLYFLEX®

PP

Standardni profil
AHW
High Flex
UFW

RoHS

Materijal:
polipropilen

Radna temperatura:
3000 h: -40°C do 105°C
350 h: -40°C do 135°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: < 100 mm/min.

Boje/izvedbe/pakiranja:
- crna, ostale na upit
- komadno rezane na upit


POLYFLEX®

PP

Normal Profile
AHW
High Flex
UFW

Svojstva:
- visoka otpornost oblika na toplinu
- enormna otpornost na promjene temperature okoline
- visoka čvrstoća
- otporne na savijanje
- izvrsna kemijska otpornost
- UV otpornost

Upotreba:
- industrija vozila
- AHW-Profil: preporučljiv za male radijuse savijanja





Material:
Polypropylene

Temperature range:
3000 h: -40°C to 105°C
350 h: -40°C to 135°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: < 100 mm/min.

Colour(s)/Designs:
- Black, others on request
- Cutted lengths on request

Characteristics:
- Great shape permanence to heat
- Enourmous cold impact strength
- High strength
- Bending stabile
- Excellent chemical resistance
- UV resistant

Applications:
- Vehicle Industries
- AHW-Profile: for small bending radii recommended

2.1

				kontejner/Container				kolut/Coil		
NW NW	Profil profile	A mm A mm	I mm I mm	Broj artikla razrezane crna Art. no. slit black	JP m PU m	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m	Broj artikla razrezane crna Art. no. slit black	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m
3	Standardni /normal	5,1	2,8	1951003	18000	1951139	18000	1926653	1926603	200
4,5	Standardni /normal	7,1	5,0	1951004	10000	1951140	9000	1926654	1926604	100
6	Standardni /normal	9,2	6,0	1951006	5000	1951141	5000	1926656	1926606	100
7,5	Standardni /normal	9,9	6,9	1951007	5000	1951142	5000	1926657	1926607	50
8,5	Standardni /normal	11,6	8,5	1951008	4000	1951143	3300	1926658	1926608	50
10	Standardni /normal	12,7	10,1	1951010	3300	1951144	3000	1926660	1926610	50
12	Standardni /normal	15,6	12,0	1951012	2200	1951145	2200	1926662	1926612	50
13	Standardni /normal	15,8	12,9	1951013	2200	1951146	2000	1926663	1926613	50
14	Standardni /normal	18,3	14,5	1951014	1700	1951147	1700	1926664	1926614	50
16	Standardni /normal	18,8	15,2	1951016	1500	1951148	1500	1926666	1926616	50
17	Standardni /normal	21,0	16,8	1951017	1300	1951149	1100	1926667	1926617	50
19	Standardni /normal	24,0	19,4	1951019	1000	1951150	800	1926669	1926619	50
22	Standardni /normal	25,5	21,8	1951022	900	1951151	700	1926672	1926622	50
23	Standardni /normal	28,0	23,7	1951023	700	1951152	650	1926673	1926623	50
26	Standardni /normal	31,3	26,4	1951026	600	1951153	600	1926676	1926626	25
29	Standardni /normal	33,9	29,3	1951029	500	1951154	450	1926679	1926629	25
37	Standardni /normal	42,0	36,7	1951037	300	1951155	250	1926687	1926637	25
50	Standardni /normal	53,6	47,8	1951050	200	1951156	150	1926690	1926650	25
4,5	AHW/ AHW	7,1	5,0	1951104	10000	1951160	9000	1927904	1927964	100
6	AHW/ AHW	9,2	6,0	1951106	5000	1951161	5000	1927906	1927966	100
8,5	AHW/ AHW	12,9	8,5	1951108	3300	1951164	3000	1927908	1927968	50
11	AHW/ AHW	15,7	11,1	1951111	2200	1951165	2000	1927911	1927971	50
15	AHW/ AHW	21,2	15,0	1951115	1300	1951167	1100	1927915	1927975	50
19	AHW/ AHW	25,7	19,1	1951119	900	1951168	700	1927919	1927979	50
26	AHW/ AHW	31,4	26,3	1951126	500	-	-	1927926	1927986	25
34	AHW/ AHW	39,5	34,1	1951134	300	1951172	250	1927934	1927994	25
13	High Flex/ High Flex	18,4	13,9	1926063	1700	1926073	1700	1926023	1926033	50
19	High Flex/ High Flex	24,0	18,8	1926049	900	1926059	700	1926029	1926039	50
23	High Flex/ High Flex	28,5	23,5	1926083	600	1926093	500	1926043	1926053	50
4,5	UFW/ UFW	7,2	4,7	1951644	10000	1951604	9000	1951724	1951684	100
7,5	UFW/ UFW	10,0	6,4	1951647	5000	1951607	5000	1951727	1951687	50
8,5	UFW/ UFW	11,9	8,4	1951648	4000	1951608	3300	1951728	1951688	50
10	UFW/ UFW	13,0	9,3	1951650	3300	1951610	3000	1951730	1951690	50
13	UFW/ UFW	15,8	12,4	1951653	2200	1951613	2000	1951733	1951693	50
17	UFW/ UFW	21,1	16,2	1951657	1300	1951617	1100	1951737	1951697	50
19	UFW/ UFW	23,6	18,8	1951659	900	1951619	700	1951739	1951699	50
22	UFW/ UFW	25,5	20,1	1951662	800	1951622	700	1951742	1951702	50
23	UFW/ UFW	28,5	22,6	1951663	700	1951623	650	1951743	1951703	50
26	UFW/ UFW	31,4	25,1	1951666	600	1951626	600	1951746	1951706	25
29	UFW/ UFW	34,5	28,5	1951669	500	1951629	450	1951749	1951709	25
37	UFW/ UFW	42,2	35,5	1951677	300	1951637	250	1951757	1951717	25

POLYFLEX®

PP GM

Standardni profil
AHW
High Flex
UFW

RoHS

Materijal:
polipropilen GM

Radna temperatura:
3000 h: -40°C do 105°C
240 h: -40°C do 125°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, ostale na upit
- komadno rezane na upit


POLYFLEX®

PP GM

Normal Profile
AHW
High Flex
UFW

Svojstva:
- visoka otpornost oblika na toplinu
- enormna otpornost na promjene temperature okoline
- visoka čvrstoća
- otporne na savijanje
- izvrsna kemijska otpornost
- UV otpornost

Upotreba:
- industrija vozila
- AHW-Profil: preporučljiv za male radijuse savijanja





Material:
Polypropylene GM

Temperature range:
3000 h: -40°C to 105°C
240 h: -40°C to 125°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, others on request
- Cutted lengths on request

Characteristics:
- Great shape permanence to heat
- Enourmous cold impact strength
- High strength
- Bending stabile
- Excellent chemical resistance
- UV resistant

Applications:
- Vehicle Industries
- AHW-Profile: for small bending radii recommended

				kontejner/Container				kolut/Coil		
NW NW	Profil profile	A mm A mm	I mm I mm	Broj artikla razrezane crna Art. no. slit black	JP m PU m	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m	Broj artikla razrezane crna Art. no. slit black	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m
3	Standardni /normal	5,1	2,8	1930503	18000	1930903	18000	1929653	1929703	200
4,5	Standardni /normal	7,1	5,0	1930504	10000	1930904	9000	1930804	1930854	100
6	Standardni /normal	9,2	6,0	1930506	5000	1930906	5000	1930806	1930856	100
7,5	Standardni /normal	9,9	6,9	1930507	5000	1930907	5000	1930807	1930857	50
8,5	Standardni /normal	11,6	8,5	1930508	4000	1930908	3300	1930808	1930858	50
10	Standardni /normal	12,7	10,1	1930510	3300	1930910	3000	1930810	1930860	50
12	Standardni /normal	15,6	12,0	1930512	2200	1930912	2200	1930812	1930862	50
13	Standardni /normal	15,8	12,9	1930513	2200	1930913	2000	1930813	1930863	50
14	Standardni /normal	18,3	14,5	1930514	1700	1930914	1700	1930814	1930864	50
16	Standardni /normal	18,8	15,2	1930516	1700	1930916	1500	1930816	1930866	50
17	Standardni /normal	21,0	16,8	1930517	1300	1930917	1100	1930817	1930867	50
19	Standardni /normal	24,0	19,4	1930519	1000	1930919	700	1930819	1930869	50
22	Standardni /normal	25,5	21,8	1930522	900	1930922	700	1930822	1930872	50
23	Standardni /normal	28,0	23,7	1930523	700	1930923	650	1930823	1930873	50
26	Standardni /normal	31,3	26,4	1930526	550	1930926	500	1930826	1930876	25
29	Standardni /normal	33,9	29,3	1930529	500	1930929	450	1930829	1930879	25
37	Standardni /normal	42,0	36,7	1930537	300	1930937	250	1930837	1930887	25
50	Standardni /normal	53,6	47,8	1930550	200	1930950	150	1930850	1930890	25
4,5	AHW/ AHW	7,1	5,0	1929604	10000	1929754	9000	1929654	1929704	100
6	AHW/ AHW	9,2	6,0	1929606	5000	1929756	5000	1929656	1929706	100
8,5	AHW/ AHW	12,9	8,5	1929608	3300	1929758	3000	1929658	1929708	50
11	AHW/ AHW	15,7	11,1	1929611	2200	1929761	2000	1929661	1929711	50
15	AHW/ AHW	21,2	15,0	1929615	1300	1929765	1100	1929665	1929715	50
19	AHW/ AHW	25,7	19,1	1929619	900	1929769	700	1929669	1929719	50
26	AHW/ AHW	31,4	26,3	1929626	500	1929766	450	1929676	1929726	25
34	AHW/ AHW	39,5	34,1	1929634	300	1929774	200	1929684	1929734	25
13	High Flex/ High Flex	18,4	13,9	1939153	1700	1939143	1700	1939053	1939043	50
19	High Flex/ High Flex	24,0	18,8	1939159	900	1939149	700	1939069	1939059	50
23	High Flex/ High Flex	28,5	23,5	1939173	600	1939163	500	1939073	1939063	50
4,5	UFW/ UFW	7,2	4,7	1952304	9000	1952204	9000	1952104	1952004	100
7,5	UFW/ UFW	10,0	6,4	1952307	5000	1952207	5000	1952107	1952007	50
8,5	UFW/ UFW	11,9	8,4	1952308	3300	1952208	3300	1952108	1952008	50
10	UFW/ UFW	13,0	9,3	1952310	3000	1952210	3000	1952110	1952010	50
13	UFW/ UFW	15,8	12,4	1952313	2000	1952213	2000	1952113	1952013	50
17	UFW/ UFW	21,1	16,2	1952317	1100	1952217	1100	1952117	1952017	50
19	UFW/ UFW	23,6	18,8	1952319	900	1952219	700	1952119	1952019	50
22	UFW/ UFW	25,5	20,1	1952322	700	1952222	700	1952122	1952022	50
23	UFW/ UFW	28,5	22,6	1952323	650	1952223	650	1952123	1952023	50
26	UFW/ UFW	31,4	25,1	1952326	600	1952226	600	1952126	1952026	25
29	UFW/ UFW	34,5	28,5	1952329	500	1952229	450	1952129	1952029	25
37	UFW/ UFW	42,2	35,5	1952337	250	1952237	250	1952137	1952037	25

POLYFLEX®

PA6 HB

Standardni profil

RoHS NFR

Materijal:
poliamid 6

Radna temperatura:
3000 h: -40°C do 120°C
240 h: -40°C do 150°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: < 100 mm/min.

Boje/izvedbe/pakiranja:
- crna, siva, ostale na upit
- komadno rezane na upit


POLYFLEX®

PA6 HB

Normal Profile

Svojstva:
- nije potrebno omatanje samoljepljivom trakom na početku ili na kraju kabla
- UV otpornost
- bez halogena

Upotreba:
- za visoka mehanička naprezanja
- motorni prostor i karoserija
- građevinski strojevi i strojevi
- brodogradnja i proizvodnja vlakova
- razvodni ormari





Material:
Polyamide 6

Temperature range:
3000 h: -40°C to 120°C
240 h: -40°C to 150°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: < 100 mm/min.

Colour(s)/Designs:
- Black, grey, others on request
- Cutted lengths on request

Characteristics:
- No wrapping tape necessary at cable feeders or cable ends
- UV resistant
- Free of halogen

Applications:
- For high mechanical stresses
- Body section and chassis
- Construction machinery and machinery
- Ship- and trainbuilding
- Switch cabinet

2.1

				kontejner/Container						kolut veliki/Coil large		kolut mali/Coil small			
NW	Profil	A mm	l mm	Broj artikla razrezane crna	m	Broj artikla nerazrezane crna	m	Broj artikla nerazrezane siva	m	Broj artikla nerazrezane crna	m	Broj artikla razrezane crna	Broj artikla nerazrezane crna	m	Broj artikla nerazrezane siva	m
NW	profile	A mm	l mm	Art. no. slit black	m	Art. no. unslit black	m	Art. no. unslit grey	m	Art. no. unslit black	m	Art. no. slit black	Art. no. unslit black	m	Art. no. unslit grey	
3	Normal/normal	5,1	2,8	1205503	18000	1200803	18000	-	-	-	-	1205030	1200073	200	-	
4,5	Normal/normal	7,1	5,0	1205504	10000	1200804	9000	-	-	1200061	200	1205045	1200068	100	-	
6	Normal/normal	9,2	6,0	1205506	5000	1200806	5000	-	-	1200021	200	1205060	1200069	100	-	
7,5	Normal/normal	10,0	6,7	1205507	5000	1200807	5000	1203957	5000	1200037	250	1205072	1200070	50	1203907	50
8,5	Normal/normal	11,7	8,4	1205508	4000	1200808	3300	1203958	3300	1200040	250	1205080	1200089	50	1203908	50
10	Normal/normal	13,0	9,9	1205510	3300	1200810	3000	1203960	3000	1200013	200	1205102	1200100	50	1203910	50
12	Normal/normal	15,7	12,2	1205512	2200	1200812	2200	1203962	2200	1200064	200	1205129	1200127	50	1203912	50
13	Normal/normal	15,8	12,7	1205513	2200	1200813	2000	1203963	2000	1200066	200	1205137	1200135	50	1203913	50
14	Normal/normal	18,5	14,2	1205514	1700	1200814	1700	1203964	1700	1200067	200	1205145	1200143	50	1203914	50
16	Normal/normal	18,9	15,0	1205516	1700	1200816	1100	-	-	1200041	150	1205161	1200160	50	-	-
17	Normal/normal	21,2	16,6	1205517	1300	1200817	1100	1203967	1100	1200016	150	1205170	1200178	50	1203917	50
19	Normal/normal	24,3	19,3	1205519	1000	1200819	800	-	-	1200054	100	1205196	1200194	50	-	-
22	Normal/normal	25,4	21,3	1205522	900	1200822	700	1203972	700	1200022	100	1205226	1200224	50	1203922	50
23	Normal/normal	28,9	23,2	1205523	700	1200823	650	1203973	650	1200023	100	1205234	1200232	50	1203923	50
26	Normal/normal	31,2	25,8	1205526	600	1200826	600	-	-	1200263	50	1205269	1200267	25	-	-
29	Normal/normal	34,5	29,0	1205529	500	1200829	450	1203979	450	1200029	50	1205290	1200291	25	1203929	25
34	Normal/normal	39,0	34,0	1205534	300	-	-	-	-	-	-	1205344	-	-	-	-
37	Normal/normal	42,4	36,0	1205537	300	1200837	250	1203987	250	1200062	30	1205374	1200372	25	1203937	25
50	Normal/normal	54,0	47,7	1205550	200	1200850	150	1203990	150	1200044	30	1205501	1200500	25	1203950	25

POLYFLEX®

PA6 HB

UFW

RoHS

Materijal:
poliamid 6

Radna temperatura:
3000 h: -40°C do 120°C
240 h: -40°C do 150°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: < 100 mm/min.

Boje/izvedbe/pakiranja:
- crna, siva, ostale na upit
- komadno rezane na upit


POLYFLEX®


PA6 HB

UFW

Svojstva:
- nije potrebno omatanje samoljepljivom trakom na početku ili na kraju kabla
- UV otpornost
- bez halogena

Upotreba:
- za visoka mehanička naprezanja
- motorni prostor i karoserija
- građevinski strojevi i strojevi
- brodogradnja i proizvodnja vlakova
- razvodni ormari





Material:
Polyamide 6

Temperature range:
3000 h: -40°C to 120°C
240 h: -40°C to 150°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: < 100 mm/min.

Colour(s)/Designs:
- Black, grey, others on request
- Cutted lengths on request

Characteristics:
- No wrapping tape necessary at cable feeders or cable ends
- UV resistant
- Free of halogen

Applications:
- For high mechanical stresses
- Body section and chassis
- Construction machinery and machinery
- Ship- and trainbuilding
- Switch cabinet

				kontejner/Container				kolut veliki/Coil large				kolut mali/Coil small					
NW mm	Profil mm	A	I	Broj artikla razrezane crna	m	Broj artikla nerazrezane crna	m	Broj artikla nerazrezane crna	m	Broj artikla perforirane crna	m	Broj artikla razrezane crna	Broj artikla nerazrezane crna	Broj artikla nerazrezane siva	m	Broj artikla perforirane crna	m
NW mm	profile mm	A	I	Art. no. slit black	m	Art. no. unslit black	m	Art. no. unslit black	m	Art. no. perforated black	m	Art. no. slit black	Art. no. unslit black	Art. no. unslit grey	m	Art. no. perforated black	m
4,5	UFW/UFW	7,3	4,7	1229304	10000	1229204	9000	1229001	200	-	-	1229104	1229004	1229700	100	-	-
7,5	UFW/UFW	10,1	6,3	1229307	5000	1229207	5000	1229002	250	-	-	1229107	1229007	1229701	50	-	-
8,5	UFW/UFW	12,0	8,2	1229308	4000	1229208	3300	1229003	250	1202630	250	1229108	1229008	1229702	50	1202610	50
10	UFW/UFW	13,1	9,3	1229310	3300	1229210	3000	1229011	200	1202631	200	1229110	1229010	1229703	50	1202611	50
13	UFW/UFW	15,9	12,0	1229313	2200	1229213	2000	1229014	200	1202632	200	1229113	1229013	1229704	50	1202612	50
17	UFW/UFW	21,2	16,0	1229317	1300	1229217	1100	1229005	150	1202633	150	1229117	1229017	1229705	50	1202613	50
19	UFW/UFW	23,7	18,6	1229319	900	1229219	700	1228006	100	-	-	1229119	1229019	1229711	50	-	-
22	UFW/UFW	25,7	19,9	1229322	800	1229222	700	1229012	100	1202634	100	1229122	1229022	1229710	50	1202614	50
23	UFW/UFW	28,6	22,2	1229323	700	1229223	650	1229015	100	-	-	1229123	1229023	1229706	50	-	-
26	UFW/UFW	31,5	24,9	1229326	600	1229226	600	1229016	50	-	-	1229126	1229026	1229707	25	-	-
29	UFW/UFW	34,6	28,4	1229329	500	1229229	450	1229020	50	-	-	1229129	1229029	1229708	25	-	-
37	UFW/UFW	42,3	35,4	1229337	300	1229237	250	1229021	30	-	-	1229137	1229037	1229709	25	-	-

POLYFLEX®

PA6 V0

Standardni profil

EN 45545: R22 HL2 - R23 HL3
Eurailtest DOC030603

RoHS | GL | LAPI | UL-Nr.: E81472 | NF F 16-101: I2+F2 Labor Currenta

Materijal:
poliamid 6

Radna temperatura:
3000 h: -40°C do 120°C
240 h: -40°C do 150°C

Gorivost:
- UL 94: V0
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, siva, ostale na upit
- komadno rezane na upit
- kontejner na upit


Svojstva:
- nije potrebno omatanje samoljepljivom trakom na početku ili na kraju kabla
- UV otpornost
- bez halogena
- NF F16-101/102: I2+F2

Upotreba:
- za visoka mehanička naprezanja
- motorni prostor i karoserija
- građevinski strojevi i strojevi
- brodogradnja i proizvodnja vlakova
- razvodni ormari
- napomena: za UL odobrenje vidi www.ul.com

POLYFLEX®

PA6 V0

Normal Profile





Material:
Polyamide 6

Temperature range:
3000 h: -40°C to 120°C
240 h: -40°C to 150°C

Inflammability:
- UL 94: V0
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, grey, others on request
- Cutted lengths on request
- Container on request

Characteristics:
- No wrapping tape necessary at cable feeders or cable ends
- UV resistant
- Free of halogen
- NF F16-101/102: I2+F2

Applications:
- For high mechanical stresses
- Body section and chassis
- Construction machinery and machinery
- Ship- and trainbuilding
- Switch cabinet
- Note: For UL article approval, see www.ul.com

2.1

				kolut/Coil						
NW NW	Profil profile	A mm A mm	I mm I mm	Broj artikla razrezane crna Art. no. slit black	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m	Broj artikla razrezane siva Art. no. slit grey	JP m PU m	Broj artikla nerazrezane siva Art. no. unslit grey	JP m PU m
3	Standardni /normal	5,2	2,8	1206103	1206003	200	-	-	-	-
7,5	Standardni /normal	10,0	6,7	1206070	1206079	50	-	-	1203070	50
8,5	Standardni /normal	11,7	8,4	-	1206085	50	-	-	1203089	50
10	Standardni /normal	13,0	9,9	1206110	1206109	50	-	-	1203100	50
12	Standardni /normal	15,7	12,2	-	1206125	50	1203612	50	1203126	50
13	Standardni /normal	15,8	12,7	1206113	1206130	50	-	-	1203134	50
14	Standardni /normal	18,5	14,2	-	1206140	50	1203614	50	1203142	50
16	Standardni /normal	18,9	15,0	-	1206160	50	-	-	-	50
17	Standardni /normal	21,2	16,6	1206117	1206176	50	1203617	50	1203177	50
19	Standardni /normal	24,3	19,3	-	1206190	50	-	-	-	50
22	Standardni /normal	25,4	21,3	-	1206220	50	1203623	50	1203223	50
23	Standardni /normal	28,3	23,2	-	1206230	50	-	-	1203231	50
26	Standardni /normal	31,2	25,8	-	1206260	25	-	-	1203266	25
29	Standardni /normal	34,5	29,0	-	1206290	25	-	-	1203290	25
37	Standardni /normal	42,4	36,6	-	1206370	25	-	-	1203371	25
50	Standardni /normal	53,7	47,7	-	1206508	25	-	-	1203509	25

POLYFLEX®

PP-BS

Standardni profil
AHW
High Flex

RoHS

Materijal:
polipropilen sa zaštitom od vatre

Radna temperatura:
3000 h: -40°C do 125°C
500 h: -40°C do 135°C
240 h: -40°C do 150°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, ostale na upit
- komadno rezane na upit


POLYFLEX®

PP-BS

Normal Profile
AHW
High Flex

Svojstva:
- visoka čvrstoća
- otporne na savijanje
- vrlo visoka otpornost na promjene temperature okoline
- UV otpornost

Upotreba:
- industrija vozila
- interijer, karoserija i motor
- AHW-Profil: preporučljiv za male radijuse savijanja





Material:
Polypropylene with fire protection

Temperature range:
3000 h: -40°C to 125°C
500 h: -40°C to 135°C
240 h: -40°C to 150°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, others on request
- Cutted lengths on request

Characteristics:
- High strength
- Bending stabile
- Very high cold impact strength
- UV resistant

Applications:
- Vehicle Industries
- Interior, chassis and body section
- AHW-Profile: for small bending radii recommended

2.1

				kontejner/Container				kolut/Coil		
NW NW	Profil profile	A mm A mm	I mm I mm	Broj artikla razrezane crna Art. no. slit black	JP m PU m	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m	Broj artikla razrezane crna Art. no. slit black	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m
3	Standardni /normal	5,1	2,8	1930403	18000	1930103	18000	1930303	1930003	200
4,5	Standardni /normal	7,1	5,0	1930404	10000	1930104	9000	1930304	1930004	100
6	Standardni /normal	9,2	6,0	1930406	5000	1930106	5000	1930306	1930006	100
7,5	Standardni /normal	9,9	6,9	1930407	5000	1930107	5000	1930307	1930007	50
8,5	Standardni /normal	11,6	8,5	1930408	4000	1930108	3000	1930308	1930008	50
10	Standardni /normal	12,7	10,1	1930410	3300	1930110	3000	1930310	1930010	50
12	Standardni /normal	15,6	12,0	1930412	2200	1930112	2200	1930312	1930012	50
13	Standardni /normal	15,8	12,9	1930413	2200	1930113	2000	1930313	1930013	50
14	Standardni /normal	18,3	14,5	1930414	1700	1930114	1700	1930314	1930014	50
16	Standardni /normal	18,8	15,2	1930416	1700	1930116	1700	1930316	1930016	50
17	Standardni /normal	21,0	16,8	1930417	1300	1930117	1100	1930317	1930017	50
19	Standardni /normal	24,0	19,4	1930419	1000	1930119	800	1930319	1930019	50
22	Standardni /normal	25,5	21,8	1930422	900	1930122	700	1930322	1930022	50
23	Standardni /normal	28,0	23,7	1930423	700	1930123	650	1930323	1930023	50
26	Standardni /normal	31,3	26,4	1930426	600	1930126	600	1930326	1930026	25
29	Standardni /normal	33,9	29,3	1930429	500	1930129	450	1930329	1930029	25
37	Standardni /normal	42,0	36,7	1930437	300	1930137	250	1930337	1930037	25
50	Standardni /normal	53,6	47,8	1930450	200	1930150	150	1930350	1930050	25
4,5	AHW/ AHW	7,1	5,0	1929404	10000	1929104	9000	1929304	1929004	100
6	AHW/ AHW	9,2	6,0	1929406	5000	1929106	5000	1929306	1929006	100
8,5	AHW/ AHW	12,9	8,5	1929408	3300	1929108	3000	1929308	1929008	50
11	AHW/ AHW	15,7	11,1	1929411	2200	1929111	2000	1929311	1929011	50
15	AHW/ AHW	21,2	15,0	1929415	1300	1929115	1100	1929315	1929015	50
19	AHW/ AHW	25,7	19,1	1929419	900	1929119	700	1929319	1929019	50
26	AHW/ AHW	31,4	26,3	1929426	500	1929126	450	1929326	1929026	25
34	AHW/ AHW	39,5	34,1	1929434	300	1929134	250	1929334	1929034	25
13	High Flex/ High Flex	18,4	13,9	1930143	1700	1930133	1700	1930243	1930233	50
19	High Flex/ High Flex	24,0	18,8	1930439	900	1930339	700	1930239	1930139	50
23	High Flex/ High Flex	28,5	23,5	1930163	500	1930153	500	1930263	1930253	50

2.1

POLYFLEX®

PP-BS

UFW
JIS

RoHS

Materijal:
polipropilen sa zaštitom od vatre

Radna temperatura:
3000 h: -40°C do 125°C
500 h: -40°C do 135°C
240 h: -40°C do 150°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, ostale na upit
- komadno rezane na upit


POLYFLEX®

PP-BS

UFW
JIS

Svojstva:
- visoka čvrstoća
- otporne na savijanje
- vrlo visoka otpornost na promjene temperature okoline
- UV otpornost

Upotreba:
- industrija vozila
- interijer, karoserija i motor
- AHW-Profil: preporučljiv za male radijuse savijanja





Material:
Polypropylene with fire protection

Temperature range:
3000 h: -40°C to 125°C
500 h: -40°C to 135°C
240 h: -40°C to 150°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, others on request
- Cutted lengths on request

Characteristics:
- High strength
- Bending stabile
- Very high cold impact strength
- UV resistant

Applications:
- Vehicle Industries
- Interior, chassis and body section
- AHW-Profile: for small bending radii recommended

				kontejner/Container				kolut/Coil		
NW NW	Profil profile	A mm A mm	l mm l mm	Broj artikla razrezane crna Art. no. slit black	JP m PU m	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m	Broj artikla razrezane crna Art. no. slit black	Broj artikla nerazrezane crna Art. no. unslit black	JP m PU m
4,5	UFW/ UFW	7,2	4,7	1967944	10000	1967904	9000	1967844	1967744	100
7,5	UFW/ UFW	10,0	6,4	1967947	5000	1967907	5000	1967847	1967747	50
8,5	UFW/ UFW	11,9	8,4	1967948	4000	1967908	3300	1967848	1967748	50
10	UFW/ UFW	13,0	9,3	1967950	3300	1967910	3000	1967850	1967750	50
13	UFW/ UFW	15,8	12,4	1967953	2200	1967913	2000	1967853	1967753	50
17	UFW/ UFW	21,1	16,2	1967957	1300	1967917	1100	1967857	1967757	50
19	UFW/ UFW	23,6	18,8	1967959	700	1967919	900	1967859	1967759	50
22	UFW/ UFW	25,5	20,1	1967962	800	1967922	700	1967862	1967762	50
23	UFW/ UFW	28,5	22,6	1967963	700	1967923	650	1967863	1967763	50
26	UFW/ UFW	31,4	25,1	1967966	600	1967926	600	1967866	1967766	25
29	UFW/ UFW	34,5	28,5	1967969	500	1967929	450	1967869	1967769	25
37	UFW/ UFW	42,2	35,5	1967977	300	1967937	250	1967877	1967777	25
5F	JIS/ JIS	7,8	5,4	1997155	5000	1997205	5000	1997105	1997005	100
7F	JIS/ JIS	10,2	7,4	1997157	5000	1997207	4000	1997107	1997007	50
10F	JIS/ JIS	14,1	10,7	1997160	2200	1997210	2200	1997110	1997010	50
13F	JIS/ JIS	17,5	13,2	1997163	1700	1997213	1700	1997113	1997013	50
15F	JIS/ JIS	19,5	15,2	1997165	1500	1997215	1500	1997115	1997015	50
19F	JIS/ JIS	23,8	19,5	1997169	900	1997219	900	1997119	1997019	50
22F	JIS/ JIS	27,0	22,1	1997172	600	1997222	600	1997122	1997022	50
25F	JIS/ JIS	30,0	25,1	1997175	500	1997225	500	1997125	1997025	25
28F	JIS/ JIS	34,0	28,2	1997178	500	1997228	500	1997128	1997028	25

POLYFLEX®

PPmod

Standardni profil
AHW
UFW

RoHS

Materijal:
modificirani polipropilen

Radna temperatura:
3000 h: -40°C do 135°C
500 h: -40°C do 150°C


Gorivost:
- UL 94: V2
- prema FMVSS 302: samogasiva
- brzina izgaranja 0 prema DIN 75200

Boje/izvedbe/pakiranja:
- crna, na upit: plava, narančasta, siva, crvena, žuta
- komadno rezane na upit

POLYFLEX®

PPmod

Normal Profile
AHW
UFW





Svojstva:
- uzdužni razrez ostaje zatvoren nakon montaže
- ušteda na težini korištenjem najmanje NW (nominalne veličine)
- nije potrebno omatanje samoljepljivom trakom na početku ili na kraju kabla
- UV otpornost

Upotreba:
- industrija vozila
- motorni prostor i karoserija
- AHW-Profil: preporučljiv za male radijuse savijanja

Material:
Polypropylene modified

Temperature range:
3000 h: -40°C to 135°C
500 h: -40°C to 150°C

Inflammability:
- UL 94: V2
- acc. to FMVSS 302: selfextinguishing
- Burningrate 0 acc. to DIN 75200

Colour(s)/Designs:
- Black, on request: blue, orange, grey, red, yellow
- Cutted lengths on request

Characteristics:
- Longitudinal slit stays closed after assembly
- Reduction in weight by using the smallest NW
- No wrapping tape necessary at cable feeders or cable ends
- UV resistant

Applications:
- Vehicle Industries
- Body section and chassis
- AHW-Profile: for small bending radii recommended

2.1

				kontejner/Container				kolut veliki/Coil large		kolut mali/Coil small		
NW	Profil	A mm	l mm	Broj artikla razrezane crna	m	Broj artikla nerazrezane crna	m	Broj artikla nerazrezane crna	m	Broj artikla razrezane crna	Broj artikla nerazrezane crna	m
NW	profile	A mm	l mm	Art. no. slit black	m	Art. no. unslit black	m	Art. no. unslit black	m	Art. no. slit black	Art. no. unslit black	m
3	Normal/normal	5,1	2,8	1950003	18000	1950053	18000	-	-	1926303	1926003	200
4,5	Normal/normal	7,1	5,0	1950004	10000	1950054	9000	1926251	200	1926304	1926004	100
6	Normal/normal	9,2	6,0	1950006	5000	1950055	5000	1926159	200	1926306	1926006	100
7,5	Normal/normal	9,9	6,9	1950007	5000	1950056	5000	1926157	250	1926307	1926007	50
8,5	Normal/normal	11,6	8,5	1950008	4000	1950057	3000	1926166	250	1926308	1926008	50
10	Normal/normal	12,7	10,1	1950010	3300	1950058	3000	1926098	200	1926310	1926100	50
12	Normal/normal	15,6	12,0	1950012	2200	1950059	2000	1926167	200	1926312	1926120	50
13	Normal/normal	15,8	12,9	1950013	2200	1950060	2000	1926133	200	1926313	1926130	50
14	Normal/normal	18,3	14,5	1950014	1700	1950061	1700	1926168	200	1926314	1926140	50
16	Normal/normal	18,8	15,2	1950016	1500	1950062	1500	1926169	150	1926316	1926160	50
17	Normal/normal	21,0	16,8	1950017	1300	1950063	1100	1926174	150	1926317	1926170	50
19	Normal/normal	24,0	19,4	1950019	1000	1950064	1000	1926177	100	1926319	1926190	50
22	Normal/normal	25,5	21,8	1950022	800	1950065	700	1926225	100	1926322	1926220	50
23	Normal/normal	28,0	23,7	1950023	700	1950066	700	1926178	100	1926323	1926223	50
26	Normal/normal	31,3	26,4	1950026	600	1950067	600	1926179	50	1926326	1926226	25
29	Normal/normal	33,9	29,3	1950029	500	1950068	500	1926180	50	1926329	1926229	25
37	Normal/normal	42,0	36,7	1950037	300	1950069	300	1926181	30	1926337	1926237	25
50	Normal/normal	53,6	47,8	1950050	200	1950070	200	1926182	30	1926350	1926250	25
4,5	AHW/AHW	7,1	5,0	1950104	10000	1950704	9000			1927304	1927004	100
6	AHW/AHW	9,2	6,0	1950106	5000	1950706	5000			1927306	1927006	100
8,5	AHW/AHW	12,9	8,5	1950108	3300	1950708	3000			1927308	1927008	50
11	AHW/AHW	15,7	11,1	1950111	2200	1950711	2000			1927311	1927110	50
15	AHW/AHW	21,2	15,0	1950115	1300	1950715	1100			1927315	1927115	50
19	AHW/AHW	25,7	19,1	1950119	900	1950719	700			1927319	1927119	50
26	AHW/AHW	31,4	26,3	1950126	500	1950726	450			1927326	1927126	25
34	AHW/AHW	39,5	34,1	1950134	300	1950734	250			1927334	1927134	25
4,5	UFW/UFW	7,2	4,7	1949344	10000	1949404	9000	1949004	200	1949304	1949204	100
7,5	UFW/UFW	10,0	6,4	1949347	5000	1949407	5000	1949007	250	1949307	1949207	50
8,5	UFW/UFW	11,9	8,4	1949348	4000	1949408	3300	1949008	250	1949308	1949208	50
10	UFW/UFW	13,0	9,3	1949350	3300	1949410	3000	1949010	200	1949310	1949210	50
13	UFW/UFW	15,8	12,4	1949353	2200	1949413	2000	1949013	200	1949313	1949213	50
17	UFW/UFW	21,1	16,2	1949357	1300	1949417	1100	1949017	150	1949317	1949217	50
19	UFW/UFW	23,6	18,8	1949359	900	1949419	700	1949019	100	1949319	1949219	50
22	UFW/UFW	25,5	20,1	1949362	800	1949422	700	1949022	100	1949322	1949222	50
23	UFW/UFW	28,5	22,6	1949363	700	1949423	650	1949023	100	1949323	1949223	50
26	UFW/UFW	31,4	25,1	1949366	600	1949426	600	1949026	50	1949326	1949226	25
29	UFW/UFW	34,5	28,5	1949369	500	1949429	450	1949029	50	1949329	1949229	25
37	UFW/UFW	42,2	35,5	1949377	300	1949437	250	1949038	30	1949337	1949237	25

2.1

POLYFLEX®

PAER

Standardni profil
AHW
High Flex
UFW

RoHS

Materijal:
modificirani poliamid 6

Radna temperatura:
3000 h: -40°C do 150°C
240 h: -40°C do 175°C

Gorivost:
- UL 94: HB
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, ostale na upit
- komadno rezane na upit


POLYFLEX®

PAER

Normal Profile
AHW
High Flex
UFW

Svojstva:
- UV otpornost
- bez halogena

Upotreba:
- industrija vozila
- motorni prostor i karoserija
- AHW-Profil: preporučljiv za male radijuse savijanja





Material:
Polyamide 6 modified

Temperature range:
3000 h: -40°C to 150°C
240 h: -40°C to 175°C

Inflammability:
- UL 94: HB
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, others on request
- Cutted lengths on request

Characteristics:
- UV resistant
- Free of halogen

Applications:
- Vehicle Industries
- Body section and chassis
- AHW-Profile: for small bending radii recommended

				kontejner/Container				kolut/Coil		
				○		○		○	○	
NW	**Profil**	**A mm**	**I mm**	**Broj artikla razrezane crna**	**JP m**	**Broj artikla nerazrezane crna**	**JP m**	**Broj artikla razrezane crna**	**Broj artikla nerazrezane crna**	**JP m**
NW	**profile**	**A mm**	**I mm**	**Art. no. slit black**	**PU m**	**Art. no. unslit black**	**PU m**	**Art. no. slit black**	**Art. no. unslit black**	**PU m**
4,5	Standardni /normal	7,1	5,0	1215904	10000	1215764	9000	1215804	1215704	100
6	Standardni /normal	9,2	6,0	1215906	5000	1215766	5000	1215806	1215706	100
7,5	Standardni /normal	10,0	6,7	1215907	5000	1215767	5000	1215807	1215707	50
8,5	Standardni /normal	11,7	8,4	1215908	4000	1215768	3300	1215808	1215708	50
10	Standardni /normal	13,0	9,9	1215910	3300	1215770	3000	1215810	1215710	50
12	Standardni /normal	15,7	12,2	1215912	2200	1215772	2200	1215812	1215712	50
13	Standardni /normal	15,8	12,7	1215913	2200	1215773	2000	1215813	1215713	50
14	Standardni /normal	18,5	14,2	1215914	1700	1215774	1700	1215814	1215714	50
16	Standardni /normal	18,9	15,0	1215916	1700	1215776	1700	1215816	1215716	50
17	Standardni /normal	21,2	16,6	1215917	1300	1215777	1100	1215817	1215717	50
22	Standardni /normal	25,4	21,3	1215922	900	1215782	700	1215822	1215722	50
23	Standardni /normal	28,3	23,2	1215923	700	1215783	650	1215823	1215723	50
26	Standardni /normal	31,2	25,8	1215926	500	1215786	600	1215826	1215726	25
29	Standardni /normal	34,5	29,0	1215929	500	1215789	450	1215829	1215729	25
37	Standardni /normal	42,4	36,0	1215937	300	1215790	250	1215837	1215737	25
50	Standardni /normal	54,0	47,7	1215950	200	1215791	150	1215850	1215750	25
4,5	AHW /AHW	7,1	5,0	1215964	10000	1215554	9000	1215043	1215504	100
6	AHW /AHW	9,2	6,0	1215966	5000	1215556	5000	1215060	1215506	100
8,5	AHW /AHW	12,9	8,5	1215968	3300	1215558	3000	1215086	1215508	50
11	AHW /AHW	15,7	11,1	1215971	2200	1215561	2000	1215116	1215511	50
15	AHW /AHW	21,2	15,0	1215975	1300	1215565	1100	1215159	1215515	50
19	AHW /AHW	25,7	19,1	1215979	900	1215569	700	1215191	1215519	50
26	AHW /AHW	31,4	26,3	1215986	500	1215576	450	1215264	1215526	25
34	AHW /AHW	39,5	34,1	1215994	300	1215586	250	1215345	1215534	25
13	High Flex /High Flex	18,6	13,9	1215313	1700	1215213	1700	1215113	1215013	50
19	High Flex /High Flex	24,2	19,0	1215319	900	1215219	700	1215119	1215019	50
23	High Flex /High Flex	28,7	23,6	1215323	600	1215223	500	1215123	1215023	50
4,5	UFW /UFW	7,3	4,7	1215164	9000	1215124	9000	1215444	1215404	100
7,5	UFW /UFW	10,1	6,3	1215167	5000	1215127	5000	1215447	1215407	50
8,5	UFW /UFW	12,0	8,2	1215168	3300	1215128	3300	1215448	1215408	50
10	UFW /UFW	13,1	9,3	1215170	3000	1215130	3000	1215450	1215410	50
13	UFW /UFW	15,9	12,0	1215173	2000	1215133	2000	1215453	1215413	50
17	UFW /UFW	21,2	16,0	1215177	1100	1215137	1100	1215457	1215417	50
19	UFW /UFW	23,7	18,6	1215179	900	1215139	700	1215459	1215419	50
22	UFW /UFW	25,7	19,9	1215182	700	1215142	700	1215462	1215422	50
23	UFW /UFW	28,6	22,2	1215183	650	1215143	650	1215463	1215423	50
26	UFW /UFW	31,5	24,9	1215186	600	1215146	600	1215466	1215426	25
29	UFW /UFW	34,6	28,4	1215189	500	1215149	450	1215469	1215429	25
37	UFW /UFW	42,3	35,4	1215197	250	1215157	250	1215477	1215437	25

POLYFLEX®


PFA TOP 240/250/260

Standardni profil

POLYFLEX®

PFA TOP 240/250/260

Normal Profile





RoHS

Materijal:
Perfluoralkoxy kopolimer

Radna temperatura:
TOP 240: 3000 h: -40°C do 240°C
TOP 240: 500 h: -40°C do 260°C

TOP 250: 3000 h: -40°C do 250°C
TOP 250: 500 h: -40°C do 270°C

TOP 260: 3000 h: -40°C do 260°C
TOP 260: 500 h: -40°C do 280°C

Gorivost:
- UL 94: VO
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, ostale na upit
- komadno rezane i kontejner na upit

Svojstva:
- otpornost na visoke temperature
- visoka otpornost na udarce
- visoka otpornost na savijanje
- visoka kemijska otpornost

Upotreba:
- automobili i kamioni
- motorni prostor i instalacije u neposrednoj blizini motora
- za ekstremno visoke temperaturne zahtjeve

Material:
Perfluoralkoxy Copolymere

Temperature range:
TOP 240: 3000 h: -40°C to 240°C
TOP 240: 500 h: -40°C to 260°C

TOP 250: 3000 h: -40°C to 250°C
TOP 250: 500 h: -40°C to 270°C

TOP 260: 3000 h: -40°C to 260°C
TOP 260: 500 h: -40°C to 280°C

Inflammability:
- UL 94: VO
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, others on request
- Cutted lengths and Containers on request


Characteristics:
- High temperature resistance
- High impact strength
- High bending strength
- High chemical resistance

Applications:
- Cars and heavy trucks
- Body section and near the engine
- For extremely high temperature demands

					kolut/Coil		
Typ **Type**	**NW** **NW**	**Profil** **profile**	**A** **mm** **A** **mm**	**I** **mm** **I** **mm**	**Broj artikla razrezane crna** **Art. no. slit black**	**Broj artikla nerazrezane crna** **Art. no. unslit black**	**JP** **m** **PU** **m**
TOP 240	4,5	Standardni /normal	7,0	4,5	1291404	1291304	100
TOP 240	6	Standardni /normal	9,3	6,2	1291406	1291306	100
TOP 240	7,5	Standardni /normal	10,0	6,9	1291407	1291307	50
TOP 240	10	Standardni /normal	13,2	10,0	1291410	1291310	50
TOP 240	13C	Standardni /normal	16,0	12,5	1291413	1291313	50
TOP 240	13C	Standardni /normal	16,0	12,5	-	1291613	200
TOP 240	14C	Standardni /normal	17,8	13,9	1291414	1291314	50
TOP 240	14C	Standardni /normal	17,8	13,9	-	1291614	150
TOP 240	17C	Standardni /normal	21,1	16,8	1291417	1291317	50
TOP 240	17C	Standardni /normal	21,1	16,8	-	1291617	150
TOP 240	19C	Standardni /normal	23,3	18,8	1291419	1291319	50
TOP 240	22C	Standardni /normal	25,0	20,3	1291422	1291322	50
TOP 240	23C	Standardni /normal	28,8	23,8	1291423	1291323	50
TOP 250	4,5	Standardni /normal	7,0	4,5	1296104	1296004	100
TOP 250	6	Standardni /normal	9,3	6,2	1296106	1296006	100
TOP 250	7,5	Standardni /normal	10,0	6,9	1296107	1296007	50
TOP 250	10	Standardni /normal	13,2	10,0	1296110	1296010	50
TOP 250	13	Standardni /normal	16,0	13,0	1296113	1296013	50
TOP 250	14	Standardni /normal	18,5	14,5	1296114	1296014	50
TOP 250	16	Standardni /normal	18,9	15,4	1296116	1296016	50
TOP 250	17	Standardni /normal	21,4	17,0	1296117	1296017	50
TOP 250	22	Standardni /normal	25,5	21,8	1296122	1296022	50
TOP 260	4,5	Standardni /normal	7,0	4,5	1291004	1291104	100
TOP 260	6	Standardni /normal	9,3	6,2	1291006	1291106	100
TOP 260	7,5	Standardni /normal	10,0	6,9	1291007	1291107	50
TOP 260	10	Standardni /normal	13,2	10,0	1291010	1291110	50
TOP 260	13C	Standardni /normal	16,0	12,5	1291013	1291113	50
TOP 260	13C	Standardni /normal	16,0	12,5	-	1291513	200
TOP 260	14C	Standardni /normal	17,8	13,8	1291014	1291114	50
TOP 260	17C	Standardni /normal	21,1	16,6	1291017	1291117	50
TOP 260	19C	Standardni /normal	23,3	18,6	1291019	1291119	50
TOP 260	22C	Standardni /normal	25,0	20,1	1291022	1291122	50
TOP 260	23C	Standardni /normal	28,8	23,8	1291023	1291123	50
TOP 260	29	Standardni /normal	34,1	28,9	1291029	1291129	25

Schlemmer-Gigant NW 70 + NW 95

Schlemmer-Gigant NW 70 + NW 95





RoHS

Materijal:
PA6: poliamid 6
PPmod: modificirani polipropilen
Poly-Tyl (LD-PE): polietilen
TPU: termoplastični poliuretan (PUR)
ostali na upit

Radna temperatura:
PA6 HB: 3000 h: -40°C do 120°C
PA6 HB: 240 h: -40°C do 150°C

PPmod: 3000 h: -40°C do 135°C
PPmod: 500 h: -40°C do 150°C

LD-PE: 3000 h: -40°C do 80°C
LD-PE: 240 h: -40°C do 105°C

TPU (PUR): 3000 h: -40°C do 125°C
TPU (PUR): 240 h: -40°C do 150°C

Gorivost:
PA6 HB/Poly-Tyl (LD-PE)/TPU (PUR):
- UL 94: HB
- prema FMVSS 302: < 100 mm/min.

PPmod:
- UL 94: V2
- prema FMVSS 302: samogasiva

Boje/izvedbe/pakiranja:
- crna, siva

Pribor:
- Gigant pričvrsnice vidi poglavlje 2.2

Upotreba:
- npr. izgradnja postrojenja, industrija kućanskih aparata, tehnologija grijanja i klimatizacije, elektro industrija

Material:
PA6: Polyamide 6
PPmod: modified Polypropylene
Poly-Tyl (LD-PE): Polyethylene
TPU: Thermoplastic Polyurethane (PUR)
others on request

Temperature range:
PA6 HB: 3000 h: -40°C to 120°C
PA6 HB: 240 h: -40°C to 150°C

PPmod: 3000 h: -40°C to 135°C
PPmod: 500 h: -40°C to 150°C

LD-PE: 3000 h: -40°C to 80°C
LD-PE: 240 h: -40°C to 105°C

TPU (PUR): 3000 h: -40°C to 125°C
TPU (PUR): 240 h: -40°C to 150°C

Inflammability:
PA6 HB/Poly-Tyl (LD-PE)/TPU (PUR):
- UL 94: HB
- acc. to FMVSS 302: < 100 mm/min

PPmod:
- UL 94: V2
- acc. to FMVSS 302: selfextinguishing

Colour(s)/Designs:
- Black, grey

Accessories:
- Gigant Fixings see chapter 2.2

Applications:
- e.g. plant construction, home appliance industry, heating and air-conditioning installations, electrical industry

							kolut/Coil		
							○	○	
Materijal	**NW**	**UL 94**	**Gorivost prema FMVSS 302**	**I-Ø mm**	**A-Ø mm**	**polumjer savijanja mm**	**Broj artikla nerazrezane crna**	**Broj artikla nerazrezane siva**	**JP kolut m**
Material	**NW**	**UL 94**	**Inflammability acc. to FMVSS 302**	**I-Ø mm**	**A-Ø mm**	**Bending radius mm**	**Art. no. unslit black**	**Art. no. unslit grey**	**PU ring m**
PA6 HB	70	HB	< 100 mm/min.	66,5	79,2	170,0	1250053	1250050	10
PA6 HB	70	HB	< 100 mm/min.	66,5	79,2	170,0	1250055	1250052	25
PA6 HB	95	HB	< 100 mm/min.	91,0	106,0	225,0	1250060	1250063	10
PA6 HB	95	HB	< 100 mm/min.	91,0	106,0	225,0	1250062	1250065	25
PPmod	70	V2	samogasive /selfextinguishing	66,5	79,2	170,0	1253300	-	10
PPmod	70	V2	samogasive /selfextinguishing	66,5	79,2	170,0	1253302	-	25
PPmod	95	V2	samogasive /selfextinguishing	91,0	106,0	225,0	1253600	-	10
PPmod	95	V2	samogasive /selfextinguishing	91,0	106,0	225,0	1253602	-	25
Poly-Tyl (LD-PE)	70	HB	< 100 mm/min.	66,5	79,2	170,0	1253272	1253274	10
Poly-Tyl (LD-PE)	70	HB	< 100 mm/min.	66,5	79,2	170,0	1253271	1253270	25
Poly-Tyl (LD-PE)	95	HB	< 100 mm/min.	91,0	106,0	225,0	1253290	1253295	10
Poly-Tyl (LD-PE)	95	HB	< 100 mm/min.	91,0	106,0	225,0	1253292	1253297	25
TPU (PUR)	70	HB	< 100 mm/min.	66,5	79,2	170,0	1253400	1253450	10
TPU (PUR)	70	HB	< 100 mm/min.	66,5	79,2	170,0	1253402	1253452	25
TPU (PUR)	95	HB	< 100 mm/min.	91,0	106,0	225,0	1253700	1253750	10
TPU (PUR)	95	HB	< 100 mm/min.	91,0	106,0	225,0	1253703	-	21
TPU (PUR)	95	HB	< 100 mm/min.	91,0	106,0	225,0	-	1253752	25

Alati za montažu
za umetanje vodiča u razrezane rebraste cijevi


Upotreba:
Za sve razrezane rebraste cijevi

Napomena:
Rubrika za nominalnu veličinu (NW) je samo preporuka i ovisi o količini vodiča koje treba umetnuti.


Assembly Tools
for inserting wires into slit corrugated tubes

Applications:
For all slit corrugated tubes


Note:
The use for nominal size (NW) is only a recommendation and depends on the respective filling level.




Opis Description	Materijal Material	Profil Profile	za NW cca. for NW approx.	Broj artikla Art. no.	JP kom. PU pcs.
Univerzalni montažni alat, mali	PA66	Stand. /normal	4,5 - 10	9001515	1
Universal Assembly tool, small	PA66	UFW/ UFW	4,5 - 10	9001515	1
	PA66	AHW/ AHW	4,5 - 8,5	9001515	1
	PA66	samozatvarajući selfclosing	4,5L - 10L	9001515	1



Univerzalni montažni alat, srednji	PA66	Stand. /normal	7,5 - 12	9001543	1
Universal Assembly tool, middle	PA66	AHW/ AHW	4,5 - 8,5	9001543	1
Univerzalni montažni alat, veliki	PA66	Stand. /normal	od 12/ from 12	9001550	1
Universal Assembly tool, big	PA66	UFW/ UFW	od 13/ from 13	9001550	1
	PA66	AHW/ AHW	od 11/ from 11	9001550	1
	PA66	samozatvarajući selfclosing	od 13L/ from 13L	9001550	1



Montažni alat	Metal / metal	Stand. /normal	4,5	9001524	1
Assembly tool	Metal / metal	Stand. /normal	7,5	9001527	1
	Metal / metal	Stand. /normal	10	9001530	1
	Metal / metal	Stand. /normal	13	9001533	1
	Metal / metal	Stand. /normal	17	9001537	1
	Metal / metal	Stand. /normal	22	9001542	1
	Metal / metal	Stand. /normal	29 S	9001544	1
	Metal / metal	AHW/ AHW	4,5	9001524	1
	Metal / metal	AHW/ AHW	6	9001527	1
	Metal / metal	AHW/ AHW	8,5	9001530	1
	Metal / metal	AHW/ AHW	11	9001533	1
	Metal / metal	AHW/ AHW	13 S	9001534	1
	Metal / metal	AHW/ AHW	15	9001537	1
	Metal / metal	AHW/ AHW	19	9001542	1
	Metal / metal	AHW/ AHW	23 S	9001545	1



Metal / metal PA66-GF

Montažni alat za optička vlakna	PA66-GF	Stand. /normal	3	9001540	1
Assembly tool for fiber optics	Metal / metal	Stand. /normal	3	9001539	1



Alat za zatvaranje zabravljujućih rebrastih cijevi	PA66-GF	zabravljujući	8,5	9001558	1
za montažni alat vidi: Univerzalni montažni alat. veliki	PA66-GF	lockable	11	9001561	1
	PA66-GF	zabravljujući	13	9001552	1
Closing Tool for lockable corrugated tube	PA66-GF	lockable	15	9001567	1
Assembly tool see Universal Mounting-tool, big	PA66-GF	zabravljujući	19	9001555	1
	PA66-GF	lockable	26	9001564	1

Alati za rezanje
rebrastih cijevi


Cutting Tools
for Corrugated tubes

rez na vrhu rebra


Sve Schlemmer rebraste cijevi prerezane su na vrhu rebra.
Na taj način se izbjegava oštećivanje vodiča koji se nalaze u unutrašnjosti.

cut on the crest

All Schlemmer corrugated tubes are cut on the crest.
This avoids the abrasion of inside lying wires.









Opis Description	za profil for Profile	NW NW	Broj artikla Art. no.	JP kom. PU pcs.
Kliješta za rebraste cijevi / uklj. 3 zamjenske oštrice	standard./normal	do/to 17	9001450	1
Corrugated tube Pliers/incl. 3 replacement blades	AHW/AHW	do/to 15	9001450	1
zamjenske oštrice/ Replacement blades			9001451	10
Kliješta za rezanje razrezanih rebrastih cijevi UFW /	UFW/UFW	4,5 - 22	9000160	1
Cutting pliers for slited corrugated tube UFW	standard./normal	4,5 - 22	9000163	1
	JIS/JIS	4,5 - 22	9000163	1
	AHW/AHW	4,5 - 22	9000163	1
zamjenske oštrice za / Replacement blades for			9000170	3
Univerzalna kliješta za rezanje zatvorenih	UFW/UFW	4,5 - 22	9000151	1
rebrastih cijevi od PP / PA / *		23 - 37	9000152	1
Universal cutting pliers for unslited corrugated	standard./normal	4,5 -13	9000153	1
tubes made of PP / PA / *		14 - 37	9000154	1
	JIS/JIS	5F - 13F	9000153	1
		15F - 28F	9000154	1
	AHW/AHW	6 u. 6S	9000153	1
		8,5 - 34 u.13HF	9000154	1
zamjenske oštrice za / Replacement blades for	9000152/9000154		9000156	10
zamjenske oštrice za / Replacement blades for	9000153/9000151		9000155	10

*mekše rebraste cijevi mogu se rezati pod određenim uvjetima / *softer corrugated tubes can be cut under conditions

Zaštitne cijevi + cijevne uvodnice


Protection Conduit + Glands


	stranica		page
SEMI FAST uvodnica cijevna		**SEMI FAST Conduit Gland**	
ravna	40	straight	40
koljeno 90°	41	90° elbow	41
kombinirana	42	Combi	42
O-brtva	43	O-ring sealing	43
Gigant pričvrsnice	44	**Gigant Fixings**	44
Cijev zaštitna Rakkordflex SF	45	**Protection tube Rakkordflex SF**	45
• odgovarajuće uvodnice:		• suitable glands:	
- SF uvodnica	46	- SF gland	46
- NH ravna	47 - 48	- NH straight	47 - 48
- NH kutna 90°	49	- NH 90°	49
• pribor za NH cijevne uvodnice:		• NH Accessoires:	
- stezni prsten za brtvljenje + stezni prsten	50	- Clamp sealing + Clamping ring	50
- Nosač uvodnica univerzalni - tip UVH	51	- Gland-Holder UVH	51
Žičana pletenica tip HG	52	**Wire braiding HG**	52
Cijev izolirajuća bez vlakana	53	**Non-fibrous insulating tubes**	53
Cijev zaštitna Rakkord-DU	54	**Protection tube Rakkord-DU**	54
• odgovarajuće uvodnice:		• suitable gland:	
- serija 75	55	- series 75	55
Cijev zaštitna Rakkord (Vinnylan)	56	**Protection tube Rakkord (Vinnylan)**	56
• odgovarajuće uvodnice:		• suitable gland:	
- KSV	57	- KSV	57
Schlemmer-Flex		**Schlemmer Flex**	
K-PVC	58	K-PVC	58
KUW-PVC	59	KUW-PVC	59
KUW-PUR	60	KUW-PUR	60
• odgovarajuće uvodnice:		• suitable glands:	
- LK	61	- LK	61
- LKH sa montažnom prirubnicom	62	- LKH with mounting flange	62
Cijev metalna MS-B	63	**Metal tube Bare MS-B**	63
• odgovarajuće uvodnice:		• suitable gland:	
Rakkord MS-B	64 - 65	- Rakkord MS-B	64 - 65
Cijev metalna MS-PU	66	**Metal tube MS-PU**	66
Cijev metalna MS-PVC	67	**Metal tube MS-PVC**	67
• odgovarajuće uvodnice:		• suitable glands:	
- Rakkord MS-PU/MS-PVC	68 - 69	- Rakkord MS-PU/MS-PVC	68 - 69
- FD	70	- FD	70
Cijev metalna MS-DU	71	**Metal tube MS-DU**	71
• odgovarajuće uvodnice:		• suitable gland:	
- Rakkord MS-DU	72 - 73	- Rakkord MS-DU	72 - 73
Cijev metalna MS-PVC-DU	74	**Metal tube MS-PVC-DU**	74
• odgovarajuće uvodnice:		• suitable gland:	
- Rakkord MS-PVC-DU	75 - 76	- Rakkord MS-PVC-DU	75 - 76
ANACONDA		**ANACONDA**	
Sealtite E.F.	77	Sealtite E.F.	77
Sealtite O.R.	78	Sealtite O.R.	78
Sealtite H.C.	79	Sealtite H.C.	79
Sealtite H.C.X.	80	Sealtite H.C.X.	80
Sealtite H.F.X.	81	Sealtite H.F.X.	81
Sealtite H.T.D.L.	82	Sealtite H.T.D.L.	82
Sealtite N.M.U.A.	83	Sealtite N.M.U.A.	83
Multiflex U.I.	84	Multiflex U.I.	84
Multiflex U.I.G.	85	Multiflex U.I.G.	85
• Pribor Multiflex:		• Accessories Multiflex	
- Tuljak za uzemljenje sa steznim prstenom	86	- Earthing sleeve with clamping ring	86
• odgovarajuće uvodnice za Sealtite + Multiflex:		• suitable glands for Sealtite + Multiflex:	
- ravna	87	- straight	87
- kutna 45°	88	- 45° angle	88
- kutna 90°	88	- 90° angle	88
- ravna sa unutarnjim navojem	89	- straight internal thread	89
- kombinirana	89	- Combi	89
- COMPACT	90	- COMPACT	90
Plastična spiralna traka	91	**Plastic spiral binding**	91

SEM-FAST ravna

SEM-FAST straight

RoHS | IP 65-68** | UL | UL-Nr.: E81472







Materijal:
poliamid 6

Radna temperatura:
-40°C do 120°C

Gorivost:
- po FMVSS 302: < 100 mm/min

Boje/izvedbe/pakiranja:
- crna, siva
- vanjski navoj: metrički/PG

Svojstva:
- konična brtva na rebrastoj cijevi
- brtvljenje pomoću brtvenih lamela
- poseban „click-in“ sustav

- jednostavna i brza montaža: cijev se umeće u "zatvorenu" uvodnicu
- cijev se može okretati unutar uvodnice
- visoka vlačna čvrstoća
- bez halogena

Pribor:
- O-brtva

Upotreba:
- odgovara za profile: standardni, UFW
- izrada strojeva i aparata
- brodogradnja i proizvodnja vlakova
- industrija vozila
- razvodni ormari
- Napomena: za UL sukladnost artikla pogledajte na www.UL.com

Material:
Polyamide 6

Temperature range:
-40°C to 120°C

Inflammability:
- acc. to FMVSS 302: < 100 mm/min.

Colour(s)/Designs:
- Black, grey
- External thread: metric/PG

Characteristics:
- Conical sealing on corrugated tube
- Thread sealing by sealing bars
- Special click-in system

- Easy and tight assembly: Insert tube in the „closed“ gland
- Tube is turnable within the gland
- High tensile strength
- Free of halogen

Accessories:
- O-Ring sealing

Applications:
- Suitable for profiles: normal, UFW
- Machine- and apparatus engineering
- Ship- and trainbuilding
- Vehicle industries
- Switch cabinets
- Note: For UL article approval, see www.ul.com

2.2

Vanjski navoj External Thread	za NW mm for NW mm	SW mm SW mm	A mm A mm	B Ø mm B Ø mm	C mm C mm	D mm D mm	najmanji I Ø mm smallest I Ø	J Ø mm J Ø mm	Broj artikla crna Art.-No. black	Broj artikla siva Art.-No. grey	JP komad PU pcs.	JP po kartonu PU per covering box pcs.
PG / PG												
PG 7	7,5	14,0	19,0	18,0	34,0	11,0	7,5	21,0	3805028	3805128	50	3200
PG 7	8,5	16,0	20,6	20,0	35,0	11,0	7,5	23,0	3805012	3805112	50	3200
PG 7	10	17,0	21,6	22,0	36,0	12,0	9,0	24,5	3805024	3805124	50	1800
PG 9	10	17,0	21,6	22,0	36,0	12,0	11,0	24,5	3805004	3805104	50	1800
PG 9	12+13	20,0	25,5	25,0	38,0	12,0	11,0	29,0	3805037	3805137	50	1800
PG 11	10	17,0	21,6	22,0	36,0	12,0	12,5	24,5	3805050	3805150	50	1800
PG 11	12+13	20,0	25,5	25,0	38,0	12,0	14,5	29,0	3805009	3805109	50	1800
PG 13,5	10	17,0	21,6	25,0	36,0	12,0	12,5	24,5	3805064		50	1800
PG 13,5	12+13	20,0	25,5	25,0	38,0	12,0	15,2	29,0	3805010	3805110	50	1800
PG 13,5	17	27,0	34,5	31,0	43,0	13,0	15,4	38,5	3805005	3805105	50	800
PG 16	17	27,0	34,5	31,0	43,0	13,0	18,1	38,5	3805006	3805106	50	800
PG 21	22	32,0	40,5	36,0	48,0	13,0	23,0	45,5	3805023	3805123	25	400
PG 21	23	34,0	42,5	38,0	48,0	13,0	23,0	48,5	3805014	3805114	25	400
PG 29	29	41,0	49,5	46,0	52,0	15,0	31,0	55,5	3805016	3805116	20	320
PG 36	37	50,0	59,0	55,0	62,0	17,0	39,0	66,5	3805018	3805118	10	160
PG 48	50	64,0	72,0	72,0	68,0	19,0	43,5	80,0	3805021	3805121	5	120
metrički / metric												
M 12 x 1,5	7,5	14,0	19,0	18,0	34,0	11,0	7,5	21,0	3805047	3805147	50	3200
M 12 x 1,5	8,5	16,0	20,6	20,0	35,0	11,0	7,5	23,0	3805011	3805111	50	3200
M 12 x 1,5	10	17,0	21,6	22,0	36,0	12,0	7,5	24,5	3805000	3805100	50	1800
M 16 x 1,5	10	17,0	21,6	22,0	36,0	12,0	11,0	24,5	3805001	3805101	50	1800
M 16 x 1,5	12+13	20,0	25,5	25,0	38,0	12,0	11,0	29,0	3805007	3805107	50	1800
M 20 x 1,5	12+13	20,0	25,5	25,0	38,0	12,0	15,2	29,0	3805008	3805108	50	1800
M 20 x 1,5	17	27,0	34,5	31,0	43,0	13,0	15,4	38,5	3805002	3805102	50	800
M 25 x 1,5	17	27,0	34,5	31,0	43,0	13,0	19,1	38,5	3805003	3805103	50	800
M 25 x 1,5	22	32,0	40,5	36,0	48,0	13,0	25,0	45,5	3805022	3805122	25	400
M 25 x 1,5	23	34,0	42,5	38,0	48,0	13,0	19,1	48,5	3805013	3805113	25	400
M 32 x 1,5	29	41,0	49,5	46,0	52,0	15,0	25,5	55,5	3805015	3805115	20	320
M 40 x 1,5	37	50,0	59,0	55,0	62,0	17,0	34,0	66,5	3805017	3805117	10	160
M 50 x 1,5	50	64,0	72,0	72,0	68,0	19,0	43,5	80,0	3805019	3805119	5	120
M 63 x 1,5	50	64,0	72,0	72,0	68,0	19,0	53,2	80,0	3805020	3805120	5	120

Montaža /Assembly

IP 68**
Kako biste postigli nivo zaštite IP 68, umetnite O-brtvu u prvi utor do reza rebraste cijevi sa montažne strane cijevi. Za standardni profil NW50 umetnite dvije O-brtve u prvi i drugi utor cijevi.

To achieve the protection class IP 68, slip the O ring into the first groove of the cut end of the corrugated tube section on the screw side. For normal profiled size NW 50 slip two O ring sealings into the first and second groove of the tube.



Prerežite cijev po vrhu rebra (optimalna zaštita cijevi i konektora).
Separate the tube at a corrugation crest (optimal protection of the tube and connector)




Laganim uvijanjem umetnite cijev u zatvorenu uvodnicu dok ne dođe do kraja.
Insert the tube in the closed gland with a slight twist until the collar stop




Polagano povucite rebrastu cijev unatrag, čime učvršćujete cijev unutar uvodnice.
Slightly pull back the tube in the gland (to latch securely)

SEM-FAST koljeno 90°

SEM-FAST 90° elbow







RoHS | IP 65-68** | UL | UL-Nr.: E81472

Materijal:
poliamid 6

Radna temperatura:
-40°C do 120°C

Gorivost:
• po FMVSS 302: < 100 mm/min

Boje/izvedbe/pakiranja:
• crna, siva
• vanjski navoj: metrički/PG

Svojstva:
• konična brtva na rebrastoj cijevi
• brtvljenje pomoću brtvenih lamela
• poseban „click-in“ sustav

• jednostavna i brza montaža:
cijev se umeće u "zatvorenu" uvodnicu
• cijev se može okretati unutar uvodnice
• visoka vlačna čvrstoća
• bez halogena

Pribor:
• O-brtva

Upotreba:
• odgovara za profile: standardni, UFW
• izrada strojeva i aparata
• brodogradnja i proizvodnja vlakova
• industrija vozila
• razvodni ormari
• Napomena: za UL sukladnost artikla pogledajte na www.UL.com

Material:
Polyamide 6

Temperature range:
-40°C to 120°C

Inflammability:
• acc. to FMVSS 302: < 100 mm/min.

Colour(s)/Designs:
• Black, grey
• External thread: metric/PG

Characteristics:
• Conical sealing on corrugated tube
• Thread sealing by sealing bars
• Special click-in system

• Easy and tight assembly:
Insert tube in the „closed“ gland
• Tube is turnable within the gland
• High tensile strength
• Free of halogen

Accessories:
• O-Ring sealing

Applications:
• Suitable for profiles: normal, UFW
• Machine- and apparatus engineering
• Ship- and trainbuilding
• Vehicle industries
• Switch cabinets
• Note: For UL article approval, see www.ul.com

2.2

Vanjski navoj External Thread	za NW mm for NW mm	A mm A mm	B Ø mm B Ø mm	C mm C mm	D mm D mm	najmanji l Ø smallest l Ø	L mm L mm	Broj artikla crna Art.-No. black	Broj artikla siva Art.-No. grey	JP komad PU pcs.	JP po kartonu PU per covering pcs.
PG / PG											
PG 9	10	21,6	20,0	50,0	12,0	9,5	29,0	3805201	3805301	50	1800
PG 11	12 + 13	25,5	25,0	54,6	12,0	13,5	34,0	3805207	3805307	50	1000
PG 13,5	17	34,5	25,0	59,7	12,0	13,5	38,5	3805214	3805314	25	500
PG 16	17	34,5	31,0	65,8	13,0	17,0	44,5	3805213	3805313	25	500
PG 21	23	42,5	38,0	74,1	13,0	23,0	51,5	3805219	3805319	20	320
PG 29	29	49,5	48,0	86,8	15,0	31,0	63,5	3805225	3805325	10	120
PG 36	37	59,0	56,0	104,8	17,0	39,5	74,5	3805231	3805331	10	80
PG 48	50	72,0	72,0	129,0	19,0	51,5	99,8	3805237	3805337	5	40
metrički / metric											
M 16 x 1,5	10	21,6	20,0	50,0	12,0	9,5	29,0	3805200	3805300	50	1800
M 16 x 1,5	12 + 13	25,5	20,0	52,7	12,0	9,5	30,5	3805205	3805305	50	1000
M 20 x 1,5	12 + 13	25,5	25,0	54,6	12,0	13,5	34,0	3805206	3805306	50	1000
M 20 x 1,5	17	34,5	25,0	59,7	12,0	13,5	38,5	3805211	3805311	25	500
M 25 x 1,5	17	34,5	31,0	65,8	13,0	17,0	44,5	3805212	3805312	25	500
M 25 x 1,5	23	42,5	31,0	71,3	13,0	17,0	48,5	3805217	3805317	20	320
M 32 x 1,5	23	42,5	38,0	74,1	13,0	23,0	51,5	3805218	3805318	20	320
M 32 x 1,5	29	49,5	38,0	77,2	13,0	23,0	54,5	3805223	3805323	10	120
M 40 x 1,5	29	49,5	48,0	86,8	15,0	31,0	63,5	3805224	3805324	10	120
M 40 x 1,5	37	59,0	48,0	95,6	15,0	31,0	68,5	3805229	3805329	10	80
M 50 x 1,5	37	59,0	56,0	104,8	17,0	39,5	74,5	3805230	3805330	10	80
M 50 x 1,5	50	72,0	56,0	111,2	17,0	39,5	90,0	3805235	3805335	5	40
M 63 x 1,5	50	72,0	72,0	129,0	19,0	51,5	99,8	3805236	3805336	5	40

Montaža /Assembly

IP 68**
Kako biste postigli nivo zaštite IP 68, umetnite O-brtvu u prvi utor do reza rebraste cijevi sa montažne strane cijevi. Za standardni profil NW50 umetnite dvije O-brtve u prvi i drugi utor cijevi.

To achieve the protection class IP 68, slip the O ring into the first groove of the cut end of the corrugated tube section on the screw side. For normal profiled size NW 50 slip two O ring sealings into the first and second groove of the tube.



Prerežite cijev po vrhu rebra (optimalna zaštita cijevi i konektora).
Separate the tube at a corrugation crest (optimal protection of the tube and connector)



Laganim uvijanjem umetnite cijev u zatvorenu uvodnicu dok ne dođe do kraja.
Insert the tube in the closed gland with a slight twist until the collar stop




Polagano povucite rebrastu cijev unatrag, čime učvršćujete cijev unutar uvodnice.
Slightly pull back the tube in the gland (to latch securely)

SEM-FAST Kombinirana

SEM-FAST Combi

RoHS | IP 65-68**





2.2

Materijal:
poliamid 6
brtva: Neopren

Radna temperatura:
-25°C do 100°C

Gorivost:
- po FMVSS 302: < 100 mm/min

Boje/izvedbe/pakiranja:
- crna
- vanjski navoj: metrički/PG
- dvodijelna plastična uvodnica

Svojstva:
- konična brtva na rebrastoj cijevi
- brtvljenje pomoću brtvenih lamela
- IP 68 na strani kućišta samo za navedeni raspon promjera vodiča
- zaštita od izvlačenja vodiča
- poseban „click-in“ sustav
- jednostavna i brza montaža: cijev se umeće u "zatvorenu" uvodnicu
- cijev se može okretati unutar uvodnice
- visoka vlačna čvrstoća
- bez halogena

Pribor:
- O-brtva
- može se kombinirati sa Schlemmer-Tec brtvama sa više otvora

Upotreba:
- odgovara za profile: standardni, UFW
- izrada strojeva i aparata
- brodogradnja i proizvodnja vlakova
- industrija vozila
- razvodni ormari

Material:
Polyamide 6
Sealing: Neoprene

Temperature range:
-25°C to 100°C

Inflammability:
- acc. to FMVSS 302: < 100 mm/min.

Colour(s)/Designs:
- Black
- External thread: Metric/PG
- Two part plastic gland

Characteristics:
- Conical sealing on corrugated tube
- Thread sealing by sealing bars
- IP 68 on housing side within the specified clamping range
- Traction relief through clamping lamella
- Special click-in system
- Easy and tight assembly: Insert tube in the „closed“ gland
- Tube is turnable within the gland
- High tensile strength
- Free of halogen

Accessories:
- O-Ring sealing
- Can be combined with the Schlemmer-Tec multi-hole seal

Applications:
- Suitable for profiles: Normal, UFW
- Machine- and apparatus engineering
- Ship- and trainbuilding
- Vehicle industries
- Switch cabinets

Vanjski navoj External Thread	odgovara za rebrastu cijev NW Suitable for corrugated tube	za kabel promjera mm Clamping range mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	E mm E mm	A mm A mm	J mm J mm	Broj artikla crna Art. no. black	JP komad PU pcs.
PG /PG									
PG 9	10	2,5- 8,0	17,0	19,0	8,0	47,0	24,5	3805601	25
PG 11	12+13	3,5-10,0	20,0	22,0	8,0	53,0	29,0	3805602	25
PG 13,5	12+13	5,0-12,0	20,0	24,0	9,0	53,0	29,0	3805603	25
PG 13,5	17	5,0-12,0	27,0	24,0	9,0	58,5	38,5	3805604	25
PG 16	17	7,0-14,0	27,0	27,0	10,0	58,5	38,5	3805605	25
PG 21	22	9,0-18,0	32,0	33,0	11,0	68,5	45,5	3805606	25
PG 21	23	9,0-18,0	34,0	33,0	11,0	68,5	48,5	3805607	25
PG 29	29	14,0-25,0	41,0	42,0	11,0	75,0	55,5	3805608	10
metrički /metric									
M 16x1,5/9	10	2,5- 8,0	17,0	19,0	10,0	47,0	24,5	3805621	25
M 16x1,5/11	12+13	3,5-10,0	20,0	22,0	10,0	53,0	29,0	3805622	25
M 20x1,5/13	12+13	5,0-12,0	20,0	24,0	10,0	53,0	29,0	3805623	25
M 20x1,5/13	17	5,0-12,0	27,0	24,0	10,0	58,5	38,5	3805624	25
M 20x1,5/16	17	7,0-14,0	27,0	27,0	10,0	58,5	38,5	3805625	25
M 25x1,5/16	17	7,0-14,0	27,0	27,0	10,0	58,5	38,5	3805626	25
M 25x1,5/21	22	9,0-18,0	32,0	33,0	10,0	68,5	45,5	3805627	25
M 25x1,5/21	23	9,0-18,0	34,0	33,0	10,0	68,5	48,5	3805628	25
M 32x1,5	29	14,0-25,0	41,0	42,0	10,0	75,0	55,5	3805629	10

Montaža /Assembly

IP 68**
Kako biste postigli nivo zaštite IP 68, umetnite O-brtvu u prvi utor do reza rebraste cijevi sa montažne strane cijevi. Za standardni profil NW50 umetnite dvije O-brtve u prvi i drugi utor cijevi.

To achieve the protection class IP 68, slip the O ring into the first groove of the cut end of the corrugated tube section on the screw side. For normal profiled size NW 50 slip two O ring sealings into the first and second groove of the tube.



Prerežite cijev po vrhu rebra (optimalna zaštita cijevi i konektora).
Separate the tube at a corrugation crest (optimal protection of the tube and connector)




Laganim uvijanjem umetnite cijev u zatvorenu uvodnicu dok ne dođe do kraja.
Insert the tube in the closed gland with a slight twist until the collar stop



Polagano povucite rebrastu cijev unatrag, čime učvršćujete cijev unutar uvodnice.
Slightly pull back the tube in the gland (to latch securely)

O-brtva
za SEM-FAST
cijevnu uvodnicu

O-ring Sealing
for SEM-FAST
Conduit gland



RoHS

Materijal:
NBR 70

Radna temperatura:
-30°C do 120°C

Boje/izvedbe/pakiranja:
• crna

Svojstva:
• tvrdoća: 70°±5°
• O-brtve uvećavaju klasu zaštite za SEM-FAST cijevne uvodnice.
• za standardni profil NW50 umetnite dvije O-brtve u prvi i drugi utor cijevi

Upotreba:
• ove O-brtve koriste se za pouzdano brtvljenje od ulja, prašine i vode

Material:
NBR 70

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
• Black


Characteristics:
• Shore hardness: 70°±5°
• O rings increase the protection class for the SEM-FAST tube glands
• slip two O-ring sealings for size NW 50 into the first and second groove of the tube

Applications:
• These O-rings are used for reliable sealing against oil, dust and water.

2.2

odgovara za profil Suitable for Profile	NW NW	Ø-D mm Ø-D mm	Ø-d mm Ø-d mm	Broj artikla crna Art. no. black	JP kom. PU pcs.
standardni PA6	7,5	5,0	1,50	8112800	50
standardni PA6	8,5	7,0	1,20	8112801	50
standardni PA6	10	7,0	1,50	8112802	50
standardni PA6	12	9,0	1,50	8112804	50
standardni PA6	13	8,0	1,60	8112803	50
standardni PA6	17	14,0	1,78	8112807	50
standardni PA6	22	14,0	2,00	8112808	25
standardni PA6	23	18,0	2,00	8112809	25
standardni PA6	29	20,0	2,50	8112810	20
standardni PA6	37	24,0	2,50	8112811	10
standardni PA6	50*	28,0	2,50	8112813	5
UFW PA6	7,5	7,0	1,5	8112802	50
UFW PA6	8,5	8,1	1,6	8112803	50
UFW PA6	10 + 13	9,1	1,6	8112805	50
UFW PA6	17	13,0	2,5	8112806	50
UFW PA6	22 + 23	20,0	2,5	8112810	20
UFW PA6	29	24,0	3,0	8112812	20
UFW PA6	37	30,0	3,0	8112814	10

Montaža O-brtve / O-ring Assembly



Kako biste postigli nivo zaštite IP 68, umetnite O-brtvu u prvi utor do reza rebraste cijevi sa montažne strane. Za standardni profil NW50 umetnite dvije O-brtve u prvi i drugi utor cijevi.

To achieve the protection class IP 68, slip the O ring into the first groove of the cut end of the corrugated tube section on the screw side. For normal profile size NW 50 slip two O-ring sealings into the first and second groove of the tube.

Pričvrsnice
za Schlemmer-Gigant

Fixings
for Schlemmer-Gigant



Spojnica / Sleeve — Pričvrsnica ravna / Fixing straight — Pričvrsnica 90° / Fixing 90°

IP 54 | RoHS

Materijal:
poliamid 6
O-brtva: tvrdoća NBR 70° A±5

Radna temperatura:
PA6: -30°C do 120°C

Boje/izvedbe/pakiranja:
• crna, siva

Svojstva:
• pričvrsnice: prirubnica sa brtvenim prorezom i 4 otvora Ø 6,5 mm za pričvršćivanje vijcima
• 2 polukružna elementa za prihvat rebrastih cijevi
• 1 prsten za pričvršćivanje
• sa brtvom sa strane kućišta (O-brtva)

Upotreba:
• izrada strojeva i aparata

Material:
Polyamide 6
O-Ring: NBR 70°shore A±5


Temperature range:
PA6: -30°C to 120°C

Colour(s)/Designs:
• Black, grey

Characteristics:
• Fixings: Flange with sealing slot and 4 fixing holes Ø 6,5 mm
• 2 half-shelves for take up the corrugated tube
• 1 fixing ring
• with sealing on housing side (O-ring)


Applications:
• machines and devices

2.2




Pričvrsnica ravna / Fixing straight

NW NW	A mm A mm	B mm B mm	C mm C mm	D mm D mm	E mm E mm	F mm F mm	Broj artikla crna Art. no. black	Broj artikla siva Art. no. grey	JP kom. PU pcs.
70	112,0	95,0	60,0	80,0	42,5	-	3206005	3206000	na upit
95	145,0	126,0	74,0	108,0	51,0	-	3206007	3206002	on request




Pričvrsnica pod kutem 90° / Fixing 90° angle

70	112,0	95,0	60,0	80,0	107,0	134,0	3206004	3206001	na upit
95	145,0	126,0	74,0	108,0	143,0	173,0	3206006	3206003	on request



Spojnica / Sleeve


70	99,5	93,0	-	-	45,0	-	3206058	-	na upit
95	130,0	124,0	-	-	56,0	-	3206052	-	on request



Obujmice + kombinirane čeljusti / Gripping Clamps + Combi Jaw

							na upit on request	na upit on request	na upit on request
70	plastični mehanizam za zatvaranje						8221570	-	10
70	metalni mehanizam za zatvaranje						8221571	-	10
95	plastični mehanizam za zatvaranje						8221572	-	10
95	metalni mehanizam za zatvaranje						8221573	-	10

Montaža Gigant spojnice / Assembly of Gigant Sleeve

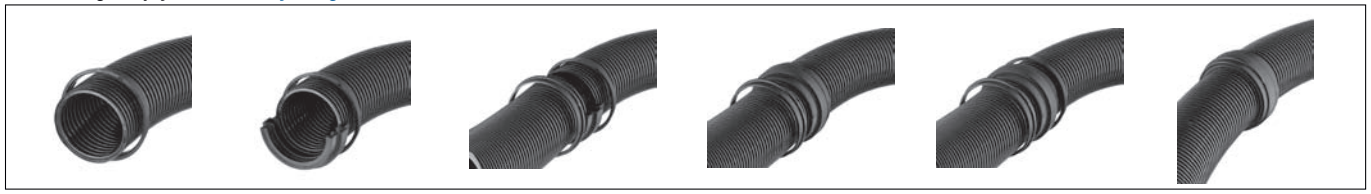

Razdjelnici + zaštitni pokrovi za utikače

Manifolds + Connector Interfaces

	stranica
Pregled razdjelnika	94 - 95
A-razdjelnici	96
T-razdjelnici	97 - 99
T-specijalni razdjelnici	100
Y-razdjelnici	101 - 102
V-razdjelnici	103
M-razdjelnici	104
Pregled zaštitnih pokrova za utikače	105
Zaštitni pokrovi za utikače	106 - 110
Kutni komad	110

	page
Overview Manifolds	94 - 95
A-manifolds	96
T-manifolds	97 - 99
T-Special Manifolds	100
Y-manifolds	101 - 102
V-manifolds	103
M-manifolds	104
Overview Connector interfaces	105
Connector interfaces	106 - 110
Angle piece	110

Pregled razdjelnika/Overview Manifolds

Razdjelnici s vanjskim obuhvatom/outside gripping Manifolds

A-razdjelnik/A-Manifold

zabravljivanje obuhvatom/clamp-lock

oblik A / Form A



zabravljivanje obuhvatom/clamp-lock

oblik B / Form B



T-razdjelnik/T-Manifold

zabravljivanje zupcima/snap-lock

oblik A / Form A



zabravljivanje obuhvatom/clamp-lock

oblik C / Form C



zabravljivanje obuhvatom/clamp-lock

oblik B / Form B



zabravljivanje obuhvatom/clamp-lock

oblik D / Form D



V-razdjelnik/V-Manifold

zabravljivanje zupcima/snap-lock

oblik A / Form A



zabravljivanje obuhvatom/clamp-lock

oblik B / Form B



Y-razdjelnik/Y-Manifold

zabravljivanje zupcima/snap-lock

oblik A / Form A



zabravljivanje obuhvatom/clamp-lock

oblik C / Form C



zabravljivanje zupcima/snap-lock

oblik B / Form B



zabravljivanje obuhvatom/clamp-lock

oblik D / Form D




M-razdjelnik/M-Manifold

zabravljivanje obuhvatom/clamp-lock





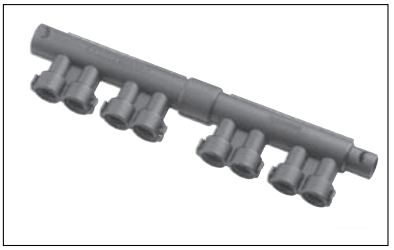



2.3

Pregled razdjelnika/Overview Manifolds

Razdjelnici s unutarnjim obuhvatom/Inside gripping Manifolds

Primjenjivi samo sa zatvorenim rebrastim cijevima/Only applicable with unslit corrugated tubes


T-razdjelnik/T-Manifold


mit zabravljivanje zupcima/with snap-lock







M-razdjelnik/M-Manifold








Kanalice izrađene po narudžbi/Customized Cable Ducts

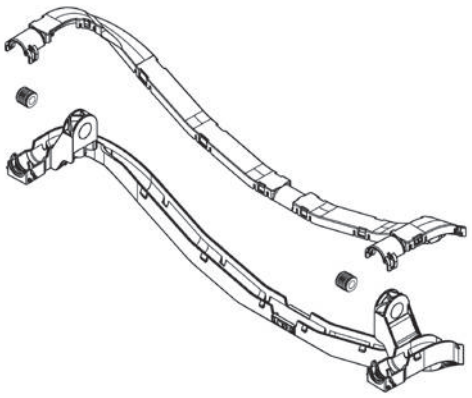




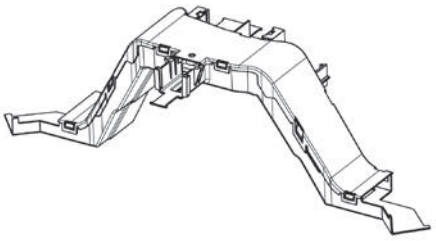

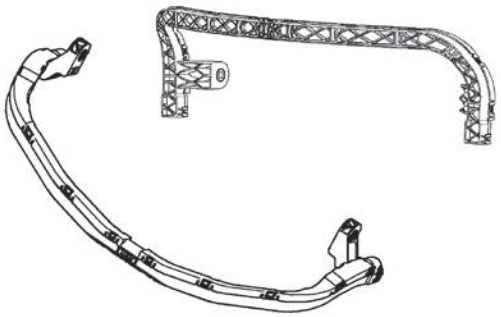

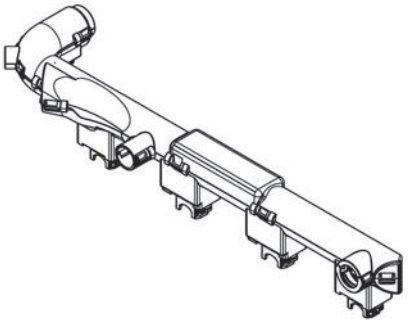

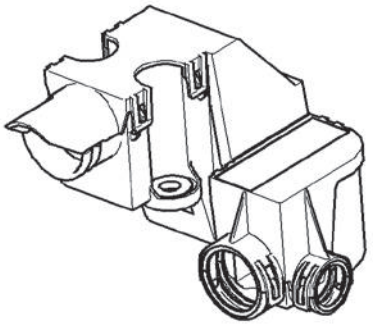

A-razdjelnici

A-Manifolds

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C


Boje/izvedbe:
• crna

Material:
Polyamide 66
Polyamide 46 on request

Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black


oblik A / Form A




oblik B / Form B



specijalni razdjelnik
Special manifold



glatka cijev
Smooth tube



2.3

oblik	obuhvat izvana	zabravljivanje obuhvatom	unutarnji graničnik za cijev	odgovara za profil rebraste cijevi NW (A-B) standardni +UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	Clamp lock	stop ridge for corru-gated tube inside	suitable for corrugated tube profile NW (A-B) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
A	✓	✓	✓	4,5	4,5	4,5		14,4	26,0	9810045	2000
A	✓	✓	✓	7,5	6	7,5		17,2	26,0	9810075	1000
A	✓	✓	✓	10	8,5	10	8,5	20,2	27,9	9810100	1000
A	✓	✓	✓	13	11	13	11	23,1	29,5	9810130	1000
A	✓	✓	✓	17	15		15	28,4	29,5	9810170	1000
A	✓	✓	✓	22	19		19	32,9	29,5	9810220	1500
A	✓	✓	✓	26	26		26	38,8	29,5	9810260	500
B	✓	✓		7,5 - 4,5	6 - 4,5	7,5 - 4,5		17,2	28,0	9810375	1000
B	✓	✓		10 - 7,5	8,5 - 6	10 - 7,5		20,2	32,0	9810400	1000
B	✓	✓		13 - 10	11 - 8,5	13 - 10	11 - 8,5	23,1	35,5	9810430	1000
B	✓	✓		17 - 13	15 - 11		15 - 11	28,4	39,5	9810470	1000
B	✓	✓		22 - 17	19 - 15		19 - 15	32,9	39,5	9810520	500
B	✓	✓		26 - 22	26 - 19		26 - 19	38,8	39,5	9810560	500
specijalni Special	✓	✓	✓	10 - 4,5		10 - 4,5			32,0	9810110	1000

T-razdjelnici

T-Manifolds

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C


Boje/izvedbe:
• crna

Material:
Polyamide 66
Polyamide 46 on request


Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black


oblik A / Form A




oblik B / Form B



oblik C / Form C



oblik D / Form D




oblik	obuhvat izvana	zabravljivanje zupcima	zabravljivanje obuhvatom	klizno umetanje na postolje	vanjsko hvatište na grani C	odgovara za profil rebraste cijevi NW (A-B-C) standardni +UFW	AHW	samozatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	Snap lock	Clamp lock	Plug socket slide in	exterior hook-up on branch C	suitable for corrugated tube profile NW (A-B-C) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
A	✓	✓		✓		7,5-7,5-7,5	6-6-6	7,5-7,5-7,5		24,7	33,4	9806082	500
A	✓	✓		✓		8,5-8,5-10		8,5-8,5-10		27,2	37,6	9806088	500
A	✓	✓		✓		10-7,5-7,5	8,5-6-6	10-7,5-7,5		24,7	36,0	9806087	500
A	✓	✓		✓		10-8,5-10		10-8,5-10		26,9	37,5	9806086	500
A	✓	✓		✓		10-10-7,5	8,5-8,5-6	10-10-7,5		26,8	38,5	9806097	500
A	✓	✓		✓		10-10-10	8,5-8,5-8,5	10-10-10	8,5-8,5-8,5	26,7	39,2	9806089	500
A	✓	✓		✓		13-7,5-13	11-6-11	13-7,5-13		30,9	35,8	9806092	500
A	✓	✓		✓		13-10-10	11-8,5-8,5	13-10-10	11-8,5-8,5	29,1	38,9	9806091	500
A	✓	✓		✓		13-13-7,5	11-11-6	13-13-7,5		30,3	41,5	9806093	500
A	✓	✓		✓		17-7,5-17	15-6-15	17-7,5-17		34,6	37,5	9806095	500
A	✓	✓		✓		17-10-17	15-8,5-15	17-10-17	15-8,5-15	35,8	40,5	9806094	500
A	✓	✓		✓		17-13-13	15-11-11	17-13-13	15-11-11	34,6	43,2	9806096	500
A	✓	✓		✓		17-17-7,5	15-15-6	17-17-7,5		39,5	48,9	9806099	250
B	✓		✓	✓		4,5-4,5-4,5	4,5-4,5-4,5	4,5-4,5-4,5		24,1	30,0	9806162	500
B	✓		✓	✓	✓	7,5-4,5-7,5	6-4,5-6	7,5-4,5-7,5		25,7	36,6	9806081	500
B	✓		✓	✓		7,5-7,5-4,5	6-6-4,5	7,5-7,5-4,5		33,2	25,7	9806168	500
B	✓		✓	✓	✓	7,5-7,5-7,5	6-6-6	7,5-7,5-7,5		26,1	39,2	9806083	500
B	✓		✓	✓	✓	7,5-10-7,5	6-8,5-6	7,5-10-7,5		26,1	42,4	9806180	250
B	✓		✓	✓	✓	8,5-8,5-8,5		8,5-8,5-8,5		29,0	43,4	9806133	500
B	✓		✓	✓	✓	8,5-8,5-10		8,5-8,5-10		28,5	41,1	9806079	500
B	✓		✓	✓	✓	10-4,5-7,5	8,5-4,5-6	10-4,5-7,5		33,7	50,8	9806197	500
B	✓		✓	✓	✓	10-4,5-10	8,5-4,5-8,5	10-4,5-10		28,7	36,6	9806105	500
B	✓		✓	✓		10-7,5-4,5	8,5-6-4,5	10-7,5-4,5		44,0	33,7	9806170	500
B	✓		✓	✓	✓	10-7,5-10	8,5-6-8,5	10-7,5-10		28,7	39,4	9806111	500


oblik	obuhvat izvana	zabravljivanje obuhvatom	klizno umetanje na postolje	vanjsko hvatište na grani C	glatki	odgovara za profil rebraste cijevi NW (A-B-C) standardni +UFW	AHW	samozatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	Clamp lock	Plug socket slide in	exterior hook-up on branch C	smooth	suitable for corrugated tube profile NW (A-B-C) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
B	✓	✓	✓			10-10-4,5	8,5-8,5-4,5	10-10-4,5		33,7	44,6	9806169	500
B	✓	✓	✓	✓		10-10-7,5	8,5-8,5-6	10-10-7,5		28,7	42,4	9806160	500
B	✓	✓	✓	✓		10-10-10	8,5-8,5-8,5	10-10-10	8,5-8,5-8,5	28,8	42,4	9806138	500
B	✓	✓	✓	✓		13- 4,5-13	11-4,5-11	13-4,5-13		53,0	36,6	9806307	500
B	✓	✓	✓	✓		13-7,5-13	11-6-11	13-7,5-13		31,7	40,1	9806158	500
B	✓	✓	✓	✓		13-8,5-10		13-8,5-10			52,3	9806175	500
B	✓	✓	✓			13-10-4,5	11-8,5-4,5	13-10-4,5		46,1	36,6	9806171	500
B	✓	✓	✓	✓		13-10-7,5	11-8,5-6	13-10-7,5	11-8,5-6	52,3	36,6	9806172	500
B	✓	✓	✓	✓		13-10-13	11-8,5-11	13-10-13	11-8,5-11	31,6	43,6	9806101	500
B	✓	✓	✓	✓		13-13-7,5	11-11-6	13-13-7,5		31,6	45,3	9806159	500
B	✓	✓	✓	✓		13-13-10	11-11-8,5	13-13-10	11-11-8,5	31,6	45,3	9806104	500
B	✓	✓	✓	✓		17-4,5-17	15-4,5-15	17-4,5-17		40,8	37,0	9806161	500
B	✓	✓	✓	✓		17- 7,5-13	15-6-11	17-7,5-13		36,9	41,0	9806100	500
B	✓	✓	✓	✓		17-7,5-17	15-6-15	17-7,5-17		37,0	40,8	9806137	500
B	✓	✓	✓	✓		17-10-13	15-8,5-11	17-10-13	15-8,5-11	36,9	43,6	9806107	500
B	✓	✓	✓	✓		17-10-17	15-8,5-15	17-10-17	15-8,5-15	37,0	43,8	9806136	500
B	✓	✓	✓	✓		17-13-13	15-11-11	17-13-13	15-11-11	36,9	46,0	9806166	500
B	✓	✓	✓	✓		17-13-17	15-11-15	17-13-17	15-11-15	36,3	50,1	9806141	250
B	✓	✓	✓	✓		17-17-7,5	15-15-6	17-17-7,5		36,9	50,6	9806167	500
B	✓	✓		✓		17-22-17	15-19-15		15-19-15	39,3	59,9	9806135	250
B	✓	✓		✓		22-4,5-22	19-4,5-19			37,7	41,4	9806106	500
B	✓	✓		✓		22-7,5-22	19-6-19			41,4	39,5	9806113	500
B	✓	✓		✓		22-8,5-22				47,0	66,4	9806149	500
B	✓	✓		✓		22-10-10	19-8,5-8,5		19-8,5-8,5	47,0	66,3	9806143	500
B	✓	✓		✓		22-10-17	19-8,5-15		19-8,5-15	47,0	67,7	9806179	500
B	✓	✓		✓		22-10-22	19-8,5-19		19-8,5-19	41,5	42,5	9806121	500
B	✓	✓		✓	✓	22-10-22	19-8,5-19		19-8,5-19	66,4	47,0	9806164	100
B	✓	✓		✓		22-13-17	19-11-15		19-11-15	41,4	46,7	9806114	250
B	✓	✓		✓		22-13-22	19-11-19		19-11-19	41,4	46,4	9806108	500
B	✓	✓	✓	✓		22-17-13	19-15-11		19-15-11	41,9	51,3	9806103	250
B	✓	✓	✓	✓		22-22-10	19-19-8,5		19-19-8,5			9806178	250
B	✓	✓		✓		22-22-13	19-19-11		19-19-11	43,8	58,5	9806142	250
B	✓	✓		✓		22-22-22	19-19-19		19-19-19	42,4	56,2	9806102	250
B	✓	✓		✓	✓	22-22-22	19-19-19		19-19-19	66,4	47,0	9806165	500
B	✓	✓		✓		22-26-17	19-26-15		19-26-15	42,5	57,0	9806184	250
B	✓	✓		✓		22-29-26				48,5	60,0	9806182	250
B	✓	✓		✓		26-4,5-22	26-4,5-19			53,0	72,3	9806153	100
B	✓	✓		✓		26-4,5-26	26-4,5-26			53,0	73,0	9806144	500
B	✓	✓		✓		26-7,5-22	26-6-19			53,0	72,3	9806156	500
B	✓	✓		✓		26-7,5-26	26-6-26			53,0	73,0	9806177	500
B	✓	✓		✓		26-8,5-26				53,0	73,0	9806145	500
B	✓	✓		✓		26-10-26	26-8,5-26		26-8,5-26	47,6	45,1	9806129	500
B	✓	✓		✓		26-13-13	26-11-11		26-11-11	53,0	72,9	9806140	500
B	✓	✓		✓		26-13-22	26-11-19		26-11-19	53,0	72,3	9806148	500
B	✓	✓		✓		26-13-26	26-11-26		26-11-26	53,0	73,0	9806147	500
B	✓	✓		✓		26-17-17	26-15-15		26-15-15	49,0	52,5	9806109	250
B	✓	✓		✓		26-17-22	26-15-19		26-15-19	47,3	50,7	9806119	500
B	✓	✓		✓		26-17-26	26-15-26		26-15-26	53,0	73,0	9806146	500
B	✓	✓		✓		26-22-22	26-19-19		26-19-19	47,3	55,2	9806112	250
B	✓	✓		✓		26-26-10	26-26-8,5		26-26-8,5	53,0	72,2	9806174	250
B	✓	✓		✓		26-26-13	26-26-11		26-26-11	53,0	72,9	9806134	500
B	✓	✓		✓		26-26-22	26-26-19		26-26-19	47,4	61,2	9806110	250
B	✓	✓		✓		26-26-26	26-26-26		26-26-26	53,0	73,0	9806157	500
B	✓	✓				29-13-29				51,5	41,5	9806183	250
B	✓	✓				29-17-26				51,4	46,4	9806181	250
B	✓	✓		✓		29-17-29				53,5	59,6	9806301	500
B	✓	✓				37-13-26				50,2	57,9	9806205	100
B	✓	✓				50-26-50				69,5	82,0	9806204	100
B	✓	✓		✓		50-37-26				80,8	78,8	9806209	125
B	✓	✓		✓		50-37-50				96,0	78,9	9806208	50

T-razdjelnici
T-Manifolds


oblik C / Form C



oblik D / Form D



obuhvat iznutra / Inside gripping




samo za standardni profil, nerazrezane
only for normal profile unslit

oblik Form	obuhvat izvana outside gripping	obuhvat iznutra inside gripping	zabravljivanje zupcima Snap lock	zabravljivanje obuhvatom Clamp lock	klizno umetanje na postolje Plug socket slide in	vanjsko hvatište na grani C exterior hook-up on branch C	unutarnji graničnik za cijev stop ridge for corrugated tube inside	vanjsko hvatište na grani A exterior hook-up on branch A	odgovara za profil rebraste cijevi NW (A-B-C) standardni +UFW suitable for corrugated tube profile NW (A-B-C) normal +UFW	AHW AHW	samozatvarajući L-Profil self closing L-Profile	zabravljujući V-Profil lockable V-Profile	b mm b mm	l mm l mm	broj artikla Art. no.	JP kom. PU pcs.
C	✓			✓	✓	✓	✓		7,5-4,5-4,5	6-4,5-4,5	7,5-4,5-4,5		24,7	37,7	9806125	1000
C	✓			✓	✓		✓		10-8,5-8,5		10-8,5-8,5		29,1	36,0	9806188	500
C	✓			✓	✓	✓	✓		10-8,5-10		10-8,5-10		29,1	42,2	9806189	500
C	✓			✓	✓		✓		10-10-8,5		10-10-8,5		29,1	37,0	9806185	500
C	✓			✓	✓	✓	✓		10-13-10	8,5-11-8,5	10-13-10	8,5-11-8,5	29,1	46,2	9806186	500
C	✓			✓	✓	✓	✓		13-4,5-10	11-4,5-8,5	13-4,5-10		30,6	39,5	9806127	500
C	✓			✓	✓	✓	✓		13-8,5-13		13-8,5-13		31,6	42,4	9806118	1400
C	✓			✓	✓	✓	✓		13-13-13	11-11-11	13-13-13	11-11-11	31,9	46,6	9806115	500
C	✓			✓	✓	✓	✓		17-8,5-17				36,9	46,0	9806120	250
C	✓			✓	✓	✓	✓		17-17-13	15-15-11		15-15-11	37,2	51,9	9806187	500
C	✓			✓	✓	✓	✓		22-22-17	19-19-15		19-19-15	43,8	60,6	9806126	900
C	✓			✓		✓	✓		22-23-10				42,2	60,6	9806116	250
C	✓			✓		✓	✓		22-23-13				42,2	61,3	9806117	250
C	✓			✓		✓	✓		23-22-22				46,6	58,4	9806122	250
C	✓			✓		✓	✓		26-17-10	26-15-8,5		26-15-8,5	49,0	51,8	9806123	250
C	✓			✓		✓	✓		26-17-13	26-15-11		26-15-11	49,0	52,2	9806124	250
C	✓			✓		✓	✓		26-22-23				49,7	57,6	9806128	250
D	✓			✓	✓			✓	10-7,5-7,5	8,5-6-6	10-7,5-7,5		28,7	39,7	9806130	2000
D	✓			✓	✓			✓	13-10-10	11-8,5-8,5	13-10-10	11-8,5-8,5	31,9	43,6	9806131	500
obuhvat iznutra / Inside gripping																
		✓	✓						10-10-10					94,0	9806073	100
		✓	✓						10-17-22					105,0	9806074	100
		✓	✓						17-17-10					94,0	9806072	100
		✓	✓						17-17-17					94,0	9806076	100
		✓	✓						22-22-10					105,0	9806069	100
		✓	✓						22-22-17					105,0	9806070	100
		✓	✓						22-22-22					105,0	9806068	250


2.3

T-specijalni razdjelnici
T-Special Manifolds


oblik A / Form A



oblik B / Form B



oblik C / Form C



HF = High Flex Profil
High Flex Profile

oblik	obuhvat izvana	zabravljivanje obuhvatom	klizno umetanje na postolje	odgovara za profil rebraste cijevi NW (A-B-C) standardni +UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	Clamp lock	Plug socket slide in	suitable for corrugated tube profile NW (A-B-C) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
A	✓	✓	✓	10-4,5-4,5	8,5-4,5-4,5	10-4,5-4,5				9806302	500
A	✓	✓			23HF-13-23HF			51,0	49,6	9810550	250
A	✓	✓			23HF-13-23HF			51,0	47,6	9810551	250
A	✓	✓		26-29-26				48,5	60,0	9806304	500
B	✓	✓		13-8,5-10	11-8,5-8,5	13-8,5-10	11-8,5-8,5			9806191	500
B	✓	✓		10-10-10	8,5-8,5-8,5	10-10-10	8,5-8,5-8,5			9806190	500
B	✓	✓		17-10-17	15-8,5-15	17-10-17	15-8,5-15			9806192	500
B	✓	✓		17-13-13	15-11-11	17-13-13	15-11-11			9806193	500
B	✓	✓		29-26-29				53,5	59,6	9806154	500
C	✓	✓		29-10/7,5-29						9806300	500

2.3

Y-razdjelnik

Y-Manifolds

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C


Boje/izvedbe:
• crna

Material:
Polyamide 66
Polyamide 46 on request


Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black


oblik A / Form A




oblik B / Form B



oblik C / Form C




oblik D / Form D




oblik / Form	obuhvat izvana / outside gripping	zabravljivanje zupcima / Snap lock	zabravljivanje obuhvatom / Clamp lock	klizno umetanje na postolje / Plug socket slide in	vanjsko hvatište na grani C / exterior hook-up on branch C	unutarnji graničnik za cijev / stop ridge for corrugated tube inside	odgovara za profil rebraste cijevi NW (A-B-C) / suitable for corrugated tube profile NW (A-B-C) standardni +UFW / normal +UFW	AHW	samozatvarajući L-Profil / self closing L-Profile	zabravljujući V-Profil / lockable V-Profile	b mm / b mm	l mm / l mm	broj artikla / Art. no.	JP kom. / PU pcs.
A	✓	✓					7,5-4,5-4,5	6-4,5-4,5	7,5-4,5-4,5		30,0	40,0	9817080	1000
A	✓	✓					7,5-4,5-7,5	6-4,5-6	7,5-4,5-7,5		30,0	40,0	9817083	1000
B	✓	✓			✓		17-13-17	15-11-15	17-13-17	15-11-15	58,4	78,8	9817201	500
B	✓	✓			✓		22-10-17	19- 8,5-15		19- 8,5-15	57,1	68,8	9817200	500
B	✓	✓			✓		22-13-17	19-11-15		19-11-15	55,1	60,3	9817203	500
B	✓	✓			✓		22-17-17	19-15-15		19-15-15	58,9	67,9	9817202	500
C	✓		✓	✓			4,5-4,5-4,5	4,5-4,5-4,5	4,5-4,5-4,5		27,8	33,0	9817050	1000
C	✓		✓	✓	✓		13-7,5-10	11-6-8,5	13-7,5-10		39,5	47,3	9817304	500
C	✓		✓		✓		13-10-10	11-8,5-8,5	13-10-10	11-8,5-8,5	45,4	59,9	9817306	500
C	✓		✓		✓		13-10-13	11-8,5-11	13-10-13	11-8,5-11	45,6	59,9	9817305	500
C	✓		✓		✓		13-13-13	11-11-11	13-13-13	11-11-11	46,6	59,9	9817308	500
C	✓		✓		✓		17-13-10	15-11-8,5	17-13-17	15-11-8,5	46,9	59,9	9817310	500
C	✓		✓		✓		17-17-10	15-15-8,5	17-17-10	15-15-8,5	48,8	59,9	9817309	500
C	✓		✓		✓		22-13-22	19-11-19		19-11-19	56,4	63,5	9817311	100
C	✓		✓		✓		22-22-22	19-19-19		19-19-19	64,7	76,7	9817302	250
C	✓		✓		✓		26-22-22	26-19-19		26-19-19	64,7	69,4	9817300	500
slično obliku C / similar to Form C														
	✓		✓	✓			8,5-8,5-8,5		8,5-8,5-8,5		38,9	45,0	9817040	500
	✓		✓	✓		✓	10-8,5-8,5		10-8,5-8,5		39,4	45,0	9817041	500
	✓		✓	✓	✓		10-8,5-10		10-8,5-10		40,0	51,2	9817030	500
	✓		✓	✓		✓	13-8,5-8,5		13-8,5-8,5		37,9	40,0	9817037	500
	✓		✓	✓	✓		13-8,5-10		13-8,5-10		40,1	49,2	9817031	500
	✓		✓	✓	✓		13-8,5-13		13-8,5-13		43,0	51,9	9817032	500
	✓		✓	✓	✓	✓	17-8,5-13		17-8,5-13		43,3	47,9	9817039	500
	✓		✓	✓	✓		17-10-10	15-8,5-8,5	17-10-10	15-8,5-8,5	41,9	46,2	9817033	500
	✓		✓	✓	✓	✓	17-10-17	15-8,5-15	17-10-17	15-8,5-15	49,7	55,6	9817038	500
	✓		✓	✓	✓		17-10-13	15-8,5-11	17-10-13	15-8,5-11	44,0	48,9	9817035	500
	✓		✓	✓	✓	✓	17-13-13	15-11-11	17-13-13	15-11-11	46,2	52,9	9817036	500
	✓		✓	✓	✓	✓	22-10-22	19-8,5-19		19-8,5-19	54,2	54,3	9817034	100
D	✓		✓		✓		10-10-10	8,5-8,5-8,5	10-10-10	8,5-8,5-8,5	43,0	54,4	9817303	500


verzija N / Version N



verzija O / Version O




specijalni razdjelnici / Special Manifolds




oblik	obuhvat izvana	obuhvat iznutra	klizno umetanje na postolje	odgovara za profil rebraste cijevi NW (A-B-C) standardni + UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	inside gripping	Plug socket slide in	suitable for corrugated tube profile NW (A-B-C) normal + UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
N		✓		8,5-8,5-8,5					66,0	9817085	100
N		✓		10-8,5-8,5					66,0	9817107	1000
N		✓		13-10-10					72,3	9805575	100
N		✓		13-10-13					76,0	9805583	100
N		✓		17-10-10					67,0	9805559	100
N		✓		17-10-13					83,0	9805567	100
N		✓		17-13-13					83,0	9805540	100
N		✓		17-17-10					85,0	9806059	100
N		✓		22-22-8,5					95,0	9817220	100
N		✓		22-22-8,5					95,0	9806032	100
N		✓		22-22-13					100,0	9806016	100
N		✓		22-22-17					100,0	9806040	100
N		✓		22-22-22					105,0	9817212	100
N		✓		26-22-22					105,0	9806045	100
N		✓		29-22-22					110,0	9817352	100
N		✓		29-22-22					110,0	9806024	100
0		✓		10-10-10					64,0	9805524	100
0		✓		13-10-8,5					69,0	9817131	100
0		✓		13-13-8,5					85,0	9817336	100
0		✓		17-10-8,5					85,0	9817158	100
0		✓		17-10-17					85,0	9817159	100
0		✓		17-17-8,5					85,0	9817174	100
0		✓		17-17-13					85,0	9817190	100
0		✓		22-17-13					85,0	9805532	100
0		✓		22-17-17					105,0	9817344	100
0		✓		26-17-22					105,0	9817396	250
0		✓		26-22-17					105,0	9817395	100
0		✓		26-22-17					105,0	9817301	100
0		✓		26-26-8,5					105,0	9817360	100
0		✓		26-26-8,5					105,0	9817263	100
0		✓		26-26-10					105,0	9817379	100
0		✓		26-26-10					105,0	9817280	100
0		✓		26-26-17					105,0	9817387	100
0		✓		26-26-17					105,0	9817328	100
0		✓		29-29-17					109,0	9806026	100
0		✓		29-29-22					109,0	9806025	100
specijalni razdjelnik / Special Manifolds											
	✓			13-13-17	11-11-15	13-13-17	11-11-15	50,8	55,0	9817312	100
	✓		✓	26-26-17	26-26-15		26-26-15	70,0	81,8	9817250	100
	✓			26-26-26	26-26-26		26-26-26	71,0	75,0	9817060	100

V-razdjelnik

V-Manifolds





RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C

Boje/izvedbe:
• crna

Material:
Polyamide 66
Polyamide 46 on request

Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black

oblik	obuhvat izvana	zabravljivanje zupcima	zabravljivanje obuhvatom	klizno umetanje na postolje	odgovara za profil rebraste cijevi NW (A-B-C) standardni +UFW	AHW	samozatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	Snap lock	Clamp lock	Plug socket slide in	suitable for corrugated tube profile NW (A-B-C) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
A	✓	✓			7,5-7,5-7,5	6-6-6	7,5-7,5-7,5		40,1	46,9	9817079	500
B	✓		✓	✓	7,5-4,5-4,5	6-4,5-6			22,5	32,5	9817501	1000
B	✓		✓		10-4,5-7,5	8,5-4,5-6			33,5	38,0	9817503	1000

2.3

M-razdjelnik

M-Manifolds

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C


Boje/izvedbe:
• crna

Material:
Polyamide 66
Polyamide 46 on request


Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black


oblik A / Form A




oblik B / Form B




oblik C / Form C

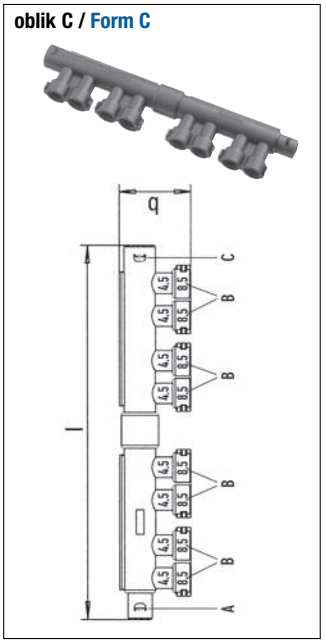

oblik D / Form D



oblik E / Form E
obuhvat iznutra / inside gripping
samo za standardni profil, nerazrezane/
only for normal profile unslit




2.3

oblik	obuhvat izvana	obuhvat iznutra	zabravljivanje obuhvatom	pričvrsnik	odgovara za profil rebraste cijevi NW (A-B-C-D) standardni +UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
Form	outside gripping	inside gripping	Clamp lock	Spreed anchor	suitable for corrugated tube profile NW (A-B-C-D) normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
A	✓		✓		7,5-4,5-4,5-4,5	6-4,5-4,5-4,5	7,5-4,5-4,5-4,5		36,5	36,0	9817090	500
A	✓		✓		10-4,5-7,5-4,5	8,5-4,5-6-4,5	10-4,5-7,5-4,5			45,4	9817092	250
A	✓		✓		10-7,5-7,5-4,5	8,5-6-6-4,5	10-7,5-7,5-4,5			45,4	9817091	500
B	✓		✓	✓	10-4,5-7,5-3	8,5-4,5-6-3			31,6	52,5	9817502	500
C	B	A+C	✓		13-8x8,5(4,5)-17				38,5	185,5	9817095	250
D	✓		✓		17-13-13-10-10	15-11-11-8,5-8,5			90,3	97,5	9811220	500
	✓		✓		29-2x10-2x17-22				82,7	81,5	9817500	250
E		✓	✓		22-5x10						9806067	50

Pregled zaštitnih pokrova za utikače / Overview Connector Interfaces

oblik A / Form A	oblik B / Form B	oblik C / Form C	oblik D / Form D
Ravni Straight	Poprečni Cross	Uzdužni Lengthwise	Okretni Turnable

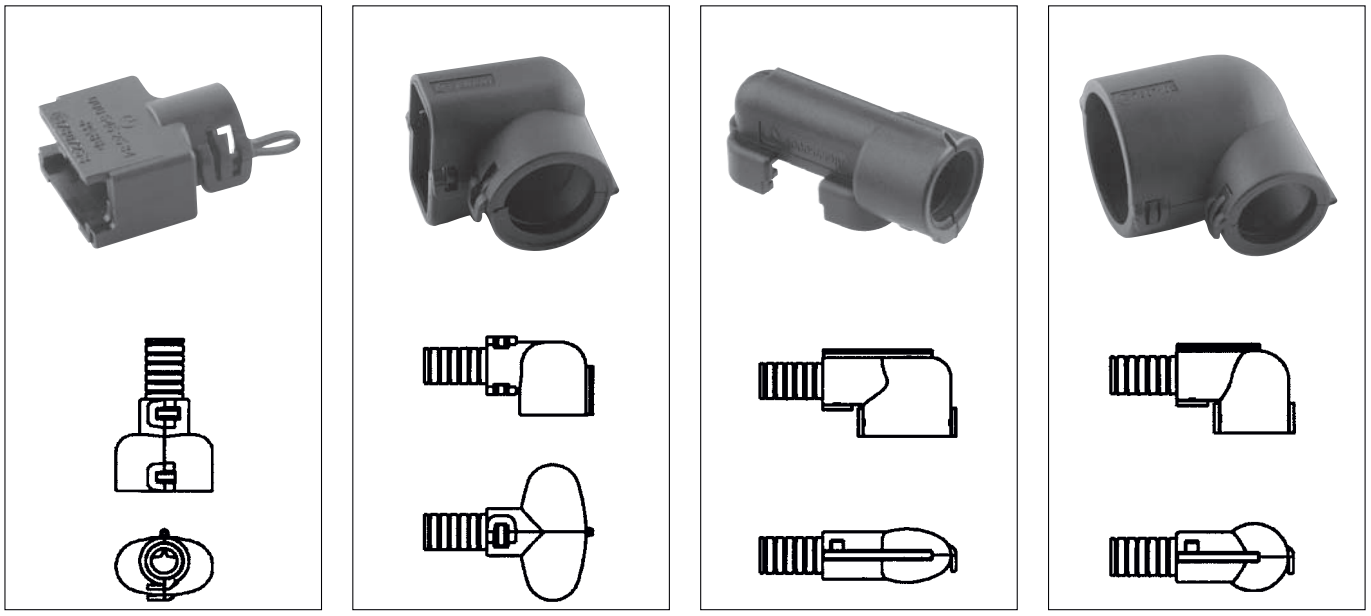


Naziv proizvođača utikača / Name of Plug Manufacturer

AMP	AMP/Tyco	FEP	Fahrzeugelektrik Pirna	RNH	Reinshagen
CINCH	CINCH	GHW	Grote & Hartmann/Lear	SA	Schlemmer
DELPHI	DELPHI	HM	Hirschmann	SIEMENS	SIEMENS
DEUTSCH	DEUTSCH	KBR	KBR	SUM	SUMITOMO
EPC	EPC	LK	Kostal	Tyco	Tyco/AMP
FCI	Framatome	RB	Robert Bosch		


Primjeri za imena zaštitnih pokrova za utikače / Examples for name of Connector Interfaces

Naziv proizvođača utikača i priključka Plug Manufacturer and poles or Connector	tip kontakta ili grupa utikača Contact-Type or Plug-family	oblik Form	odgovara za rebrastu cijev suitable for corrugated tube	Posebni detalji Special details
GHW2	MKR	A	NW 8,5	SES
FEP 2x5	2,8	B	NW 10	
AMP2	JPT	B	NW 4,5	45

Osnovne dimenzije / Main dimensions

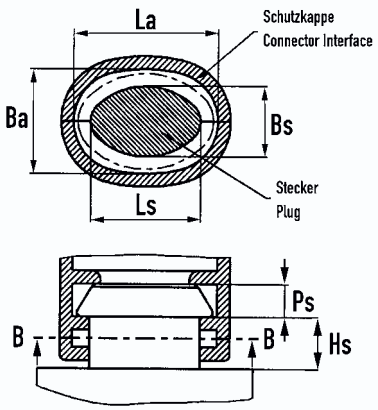


EL




eliptični oblik / Elliptical form

RE



pravokutni oblik / Rectangular form

RD



kružni oblik / Circle form


RR



uzdužni oblik / Long hole form

Zaštitni pokrovi za utikače

Connector-Interfaces

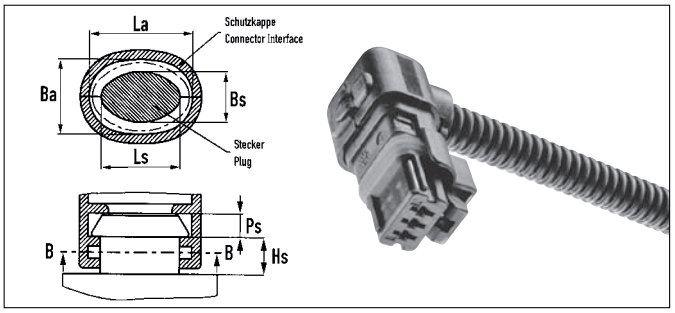

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C

Boje/izvedbe:
- crna
- obuhvat izvana

Svojstva:
- zaštita spoja između kraja cijevi i utikača
- zaštita kontaktnih površina spoja protiv prskanja i mlaza vode
- zaštita od izvlačenja vodiča
- omogućava dobru elektro provodljivost spoja
- bolji vizualni dojam spoja
- lako za montažu

Material:
Polyamide 66
Polyamide 46 on request

Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
- Black
- outside gripping

Characteristics:
- Protection of the harness between end of the tube and connector
- Protection of the harness contact cells against splash- and straywater
- traction relief for the conducting wire
- Enables a fixed guidance within the harness
- Better visual effect of the harness
- Easy to assemble

Utikač	oblik	profil NW standardni + UFW	AHW	High Flex	Svojstva	Broj utikača	oblik	Osnovne dimenzije Ls	Bs	Hs	Ps	La	Ba	broj artikla	JP kom.
Connector	Form	Contour NW normal + UFW	AHW	High Flex	Feature	Connector No.	Form	Main Dimensions Ls	Bs	Hs	Ps	La	Ba	Art. no.	PU pcs.
AMP10/2x10	A			13			RE	54,0	20,0	-	-	58,0	24,0	7807775	500
AMP10/2x10	A	17	15				RE	54,0	20,0	-	-	58,0	24,0	7807778	500
AMP10/2x10	B	13	11				RE	54,0	20,0	-	-	58,0	24,0	7807769	500
AMP10	B	9					RE	54,0	20,0	-	-	58,0	24,0	7807670	500
AMP10	D	10	8,5				RD	25,3	25,3	8,4	2,5	29,6	29,6	7807663	500
AMP10	D	7,5	6				RD	25,3	25,3	8,4	2,5	29,6	29,6	7807676	500
AMP1	A	4,5	4,5		CAND	01-51006-1	RD	10,5	10,5	-	4,2	13,4	13,4	7807653	1000
AMP1	A	4,5	4,5		CAND-50	01-51006-1	RD	10,5	10,5	-	4,2	13,4	13,4	7807683	1000
AMP1-SS	A	10	8,5			282079-x	RD	7,6	7,6	5,0	3,0	9,4	9,4	7807043	250
AMP1-SS	A	4,5	4,5			282079-x	RD	7,6	7,6	5,0	3,0	10,3	10,3	7807188	1000
AMP1-SS	A	7,5	6			282079-x	RD	7,6	7,6	5,0	3,0	10,3	10,3	7807783	1000
AMP1-SS	D	10	8,5			282079-x	RD	7,6	7,6	5,0	3,0	9,4	9,4	7807035	500
AMP1-SS	D	3				282079-x	RD	7,6	7,6	5,0	3,0	9,5	9,5	7807003	1000
AMP1-SS	D	4,5	4,5			282079-x	RD	7,6	7,6	5,0	3,0	9,5	9,5	7807063	2000
AMP21-JPT	A	glatki / smooth				1-967 630	RE	37,7	18,2	6,0	8,0	37,8	24,4	7894050	250
AMP2	B	8,5			45°	1-1355338-1	EL	13,3	8,2	7,0	4,0	17,1	12,1	7807199	1000
AMP2-CPA	A	4,5	4,5				RR	15,5	10,5	7,0	2,7	19,0	14,0	7807628	1000
AMP2-CPA	B	4,5	4,5				RR	15,5	10,5	7,0	2,7	19,0	14,0	7807730	1000
AMP2-CPA	C	4,5	4,5				RR	15,5	10,5	7,0	2,7	19,0	14,0	7807185	1000
AMP2-JPT	A	glatki / smooth				282762-x	RR	12,8	7,8	16,5	5,1	23,2	13,8	7807791	1000
AMP2-JPT	A	4,5	4,5			282762-x	RR	12,8	7,8	16,5	5,1	17,1	12,0	7807685	1000
AMP2-JPT	B	4,5	4,5		45°	282762-x	RR	12,8	7,8	16,5	5,1	17,1	12,0	7807075	1000
AMP2-MQ	A	4,5	4,5			965324	-	-	-	-	-	-	-	7807249	1000
AMP2-MQ	B	4,5	4,5			965324	-	-	-	-	-	-	-	7807247	1000
AMP2-MQS	A	4,5	4,5		ABS		EL	11,0	9,0	2,8	1,2	14,0	12,0	7807173	1000
AMP2-SS	A	glatki / smooth				282080-x	RR	13,6	7,6	5,0	3,0	20,0	10,6	7807656	1000
AMP2-SS	A	10	8,5			282080-x	RR	13,6	7,6	5,0	3,0	15,4	9,4	7807042	2000
AMP2-SS	A	10/8,5/7,5	8,5/-/6			282080-x	RR	13,6	7,6	5,0	3,0	15,4	9,4	7807490	1000
AMP2-SS	A	4,5	4,5			282080-x	RR	13,6	7,6	5,0	3,0	17,2	12,2	7807192	1000
AMP2-SS	A	7,5	6		EHK 10	282080-x	RR	13,6	7,6	5,0	3,0	17,2	12,2	7807128	1000
AMP2-SS	B	4,5	4,5			282080-x	RR	13,6	7,6	5,0	3,0	17,1	12,1	7807602	1000
AMP2-SS	C	10	8,5			282080-x	RR	13,6	7,6	5,0	3,0	15,4	9,4	7807037	1000
AMP2-SS	C	4,5	4,5			282080-x	RR	13,6	7,6	5,0	3,0	17,2	12,2	7807194	1000
AMP2-SS	C	7,5	6		EHK 10	282080-x	RR	13,6	7,6	5,0	3,0	17,2	12,2	7807120	1000
AMP2x3-CPA	A	4,5	4,5				EL	15,2	11,1	6,5	3,0	18,3	14,3	7807682	1000
AMP2x3-CPA	A	7,5	6				EL	15,2	11,1	6,5	3,0	18,3	14,3	7806861	1000
AMP2x5-1.5	B	7,5	6			6X0 973 815	EL	23,4	13,6	7,5	4,0	26,4	16,6	7807066	1000
AMP2x6	A	10	8,5		KP	-	-	-	-	-	-	-	-	7777001	500
AMP2x6	A	10	8,5		ST	-	-	-	-	-	-	-	-	7777002	500
AMP2x6	A	9				-	RE	31,2	12,6	-	2,4	34,2	15,8	7806570	500
AMP3-CPA	A	glatki / smooth					RR	19,4	10,4	7,2	2,6	23,1	14,0	7807833	1000
AMP3-CPA	A	4,5	4,5				RR	19,4	10,4	7,2	2,6	23,1	14,0	7807172	1000
AMP3-CPA	C	4,5	4,5				RR	19,4	10,4	7,2	2,6	23,1	14,0	7807657	1000

Utikač	oblik	profil NW standardni + UFW	AHW	High Flex	Svojstva	Broj utikača	oblik	Osnovne dimenzije Ls	Bs	Hs	Ps	La	Ba	broj artikla	JP kom.
Connector	Form	Contour NW normal + UFW	AHW	High Flex	Feature	Connector No.	Form	Main Dimensions Ls	Bs	Hs	Ps	La	Ba	Art. no.	PU pcs.
AMP3-CPA	C	4,5	4,5		155°		RR	19,4	10,4	7,2	2,6	23,1	14,0	7807832	500
AMP3	D	7,5	6			-	RD	15,8	15,8	8,4	2,4	20,1	20,1	7807664	1000
AMP3-JPT	A	glatki / smooth				282729-x	RR	17,8	7,8	16,5	5,5	23,2	13,8	7807792	1000
AMP3-JPT	A	4,5	4,5			282729-x	RR	17,8	7,8	16,5	5,5	23,2	13,8	7807184	1000
AMP3-JPT	C	7,5	6			282729-x	RR	17,8	7,8	16,5	5,5	23,2	13,8	7807118	1000
AMP3-MQ	A	4,5	4,5			1 967 081-1	-	-	-	-	-	-	-	7807045	1000
AMP3-SS	A	glatki / smooth				282087-x	RR	19,6	7,6	5,0	3,0	23,2	13,8	7807790	1000
AMP3-SS	A	10	8,5			282087-x	RR	19,6	7,6	5,0	3,0	21,4	9,4	7807041	250
AMP3-SS	A	10/8,5/7,5	8,5/-/6			282087-x	RR	19,6	7,6	5,0	3,0	24,8	13,2	7807491	1000
AMP3-SS	A	4,5	4,5			282087-x	RR	19,6	7,6	5,0	3,0	24,8	13,2	7807768	1000
AMP3-SS	A	7,5	6		EHK 10	282087-x	RR	19,6	7,6	5,0	3,0	24,8	13,2	7807196	1000
AMP3-SS	C	10	8,5			282087-x	RR	19,6	7,6	5,0	3,0	21,4	9,4	7807036	1000
AMP3x8	A	17	15			1745048-1	RE	44,0	18,6	6,6	1,5	47,1	21,6	7807497	500
AMP4-DIN	A	4,5	4,5			1-965569-2	RD	18,3	18,3	-	-	20,5	20,5	7807699	1000
AMP4-DIN	A	7,5	6		EHK 10	1-965569-2	RD	18,3	18,3	-	-	20,5	20,5	7807700	1000
AMP4-DIN	D	10	8,5			1-965569-2	RD	18,3	18,3	-	-	20,5	20,5	7807662	1000
AMP4-DIN	D	4,5	4,5			1-965569-2	RD	18,3	18,3	-	-	20,5	20,5	7807660	1000
AMP4-DIN	D	7,5	6		EHK 10	1-965569-2	RD	18,3	18,3	-	-	20,5	20,5	7807661	1000
AMP4-JPT	A	7,5	6			282764-x	RR	22,8	7,8	6,0	5,5	28,5	14,0	7807068	1000
AMP4-JPT	B	7,5	6			282764-x	RR	22,8	7,8	6,0	5,5	28,5	14,0	7807088	1000
AMP4-MQ	A	4,5	4,5				-	-	-	-	-	-	-	7806880	1000
AMP4-SS	A	10	8,5			282088-x	RR	25,6	7,6	5,0	3,0	27,4	9,4	7807040	250
AMP4-SS	A	10/8,5/7,5	8,5/-/6			282088-x	RR	25,6	7,6	5,0	3,0	31,0	15,2	7807492	1000
AMP4-SS	A	4,5	4,5			282088-x	RR	25,6	7,6	5,0	3,0	31,0	15,2	7807771	1000
AMP4-SS	A	7,5	6		EHK 10	282088-x	RR	25,6	7,6	5,0	3,0	31,0	15,2	7807198	1000
AMP5-JPT	A	7,5	6			282766-x	RR	27,7	7,7	16,5	5,5	32,5	15,1	7807067	1000
AMP5-JPT	A	8,5				282766-x	RR	27,7	7,7	16,5	5,5	32,5	15,1	7807086	1000
AMP5-JPT	C	4,5	4,5			282766-x	RR	27,7	7,7	16,5	5,5	35,1	15,1	7807686	1000
AMP5-SS	A	10	8,5			-	RR	31,6	7,6	5,0	3,0	33,4	9,4	7807039	250
AMP5-SS	A	7,5	6		EHK 10	-	RR	31,6	7,6	5,0	3,0	33,4	9,4	7807762	1000
AMP64	A	17	15		D5	x-284272-x	RE	22,6	15,7	-	2,0	-	-	7807622	1000
AMP6-JPT	C	10	8,5				RR	32,5	7,5	16,5	5,2	41,1	16,1	7807667	1000
AMP6-MQ	A	7,5	6			x-967616-x	-	-	-	-	-	-	-	7807606	1000
AMP6-MQS-45	-	7,5	6				-	-	-	-	-	-	-	7807498	n.u/o.r.
AMP6-MQS	B	7,5	6		180°		-	-	-	-	-	-	-	7806610	n.u/o.r.
AMP6-SS	A	10	8,5			-	RR	37,6	7,6	5,0	3,0	39,4	9,4	7807038	250
AMP6-SS	A	7,5	6		EHK 10	-	RR	37,6	7,6	5,0	3,0	39,4	9,4	7807763	1000
AMP94	A	22	19			tyco 1-1355133-2	-	-	-	-	-	-	-	7807692	500
AMP94	A			23		tyco 1-1355133-2	-	-	-	-	-	-	-	7807687	1000
AMP94	D			19			-	-	-	-	-	-	-	7807688	500
AMP94	D	22	19				-	-	-	-	-	-	-	7807693	1000
B+GENERATOR	B	glatki / smooth				-	RD	-	-	-	-	-	-	7807002	1000
CAT70	B	26	26			160-7689	RE	76,5	46,1	-	-	76,5	46,1	7807773	250
CINCH38	A	13	11			51201EV38M1	RE	27,5	13,6	5,0	6,0	30,4	16,6	7807600	1000
CINCH38	B			19		51201EV38M1	RE	27,5	13,6	5,0	6,0	30,4	16,6	7807601	500
CINCH38	C			19		51201EV38M1	RE	27,5	13,6	5,0	6,0	30,4	16,6	7807001	1000
DELPHI1-MP2,8	A	4,5	4,5			280 GT 15336354	-	14,5	8,8	-	-	-	-	7807767	1000
DELPHI2-GLOBAL	B	4,5	4,5				RR	13,6	7,6	5,0	2,0	17,1	12,1	7807602	1000
DELPHI2-GT	B	4,5	4,5		45°		-	-	-	-	-	-	-	7807190	1000
DELPHI2-MP2,8	A	7,5	6				-	22,0	8,8	-	-	-	-	7807764	1000
DELPHI2-TS	B	7,5	6			15336016	-	-	-	-	-	-	-	7807794	1000
DELPHI2x3	B	7,5	6				-	-	-	-	-	-	-	7807820	500
DELPHI2x5	A	10	8,5		glatki / smooth		-	24,0	14,4	-	-	-	-	7807671	1000
DELPHI38	B			13			-	-	-	-	-	-	-	7807836	500
DELPHI3	A	glatki / smooth					EL	-	-	-	-	-	-	7806590	1000
DELPHI4	A	7,5	6				-	-	-	-	-	-	-	7807711	1000
DELPHI4	C	7,5	6				EL	22,1	9,5	9,5	2,0	25,0	12,6	7807723	1000
DELPHI4-GT150	A	10	8,5			1533 6035	RR	15,0	5,7	4,5	3,0	-	-	7807181	1000
DELPHI4-GT150	A	7,5	6			1533 6035	RR	15,0	5,7	4,5	3,0	-	-	7807182	1000
DELPHI4-GT150	C	7,5	6			1533 6035	RR	15,0	5,7	4,5	3,0	-	-	7807178	1000
DELPHI5-GT280	C	7,5	6				RR	39,8	8,9	5,8	3,1	41,6	10,8	7807789	1000
DELPHI-FS	A	10	8,5			FS N40 BMW 7 506 699	RD	16,4	16,4	-	4,5	18,4	18,4	7807450	1000
DEUTSCH2	A	4,5	4,5				RE	12,6	10,4					7806750	1000
DEUTSCH2	D	4,5/8,5	4,5				RD	-	-	-	-	-	-	7806751	1000
EPC2	C	4,5			45°		RR	11,5	6,5	-	-	13,9	8,9	7806780	1000
FCI14/16	D	13	11				RD	24,8	24,8	2,8	3,5	28,7	28,7	7807650	1000
FCI14/16	D	13	11		glatki / smooth		RD	24,8	24,8	2,8	3,5	28,7	28,7	7807640	1000
FCI14/16	D	9					RD	24,8	24,8	2,8	3,5	28,7	28,7	7807649	1000

Utikač	oblik	profil NW standardni + UFW	AHW	High Flex	Svojstva	Broj utikača	oblik	Osnovne dimenzije Ls	Bs	Hs	Ps	La	Ba	broj artikla	JP kom.
Connector	Form	Contour NW normal + UFW	AHW	High Flex	Feature	Connector No.	Form	Main Dimensions Ls	Bs	Hs	Ps	La	Ba	Art. no.	PU pcs.
FCI14	A	10	8,5				RD	24,8	24,8	2,8	5,0	28,7	28,7	7807638	1000
FCI14	A	13	11				RD	24,8	24,8	2,8	5,0	28,7	28,7	7806583	500
FCI24	C	glatki / smooth					RE							7806625	1000
FCI24-SICMA	A	17	15				RE	39,0	21,5	9,5	7,7	39,0	21,5	7807795	500
FCI24-SICMA	C	17	15		45°		RE	39,0	21,5	9,5	7,7	39,0	21,5	7807786	n.u/o.r.
FCI2-SICMA	A	glatki / smooth					RE	15,4	13,2	-	-	15,4	13,2	7807695	1000
FCI2-SICMA	A	4,5	4,5				RE	15,4	13,2	-	-	15,4	13,2	7807169	1000
FCI x 24-2,8	A	10	8,5			3A0 973 834/3A0 973 734	EL	31,1	15,1	8,0	4,0	36,2	20,2	7807104	500
FCI34	D	glatki / smooth					RD	36,8	36,8	2,6	3,5			7806867	1000
FCI34	D	13	11		glatki / smooth -V1		RD	36,8	36,8	2,6	3,5	40,4	40,4	7806980	500
FCI34	D	13	11		glatki / smooth -V2		RD	36,8	36,8	2,6	3,5	40,4	40,4	7806981	500
FCI3-SICMA	B	7,5	6			297 857	-	-	-	-	-	-	-	7806071	3000
FCI3-SICMA	B	7,5	6				-	-	-	-	-	-	-	7806070	1000
FCI4	A	7,5	6				RE	29,5	11,3	-	-	-	-	7807797	500
FEP2-2,8	B	8,5			45°	1J0 973 722	EL	13,3	8,4	7,0	4,0	17,1	12,1	7807199	1000
FEP2-2,8	C	7,5	6			1J0 973 722	EL	13,3	8,4	7,0	4,0	17,1	12,1	7807203	1000
FEP2-4.8	C	10	8,5			1J0 973 752/3B0 973 752 A	EL	21,3	14,3	7,0	4,0	24,2	17,2	7807023	1000
FEP2 x 3-1,5	B	7,5	6			4 203 2800-1J0 973 713 G	EL	15,2	12,4	6,0	4,0	18,5	15,7	7807673	1000
FEP2x3-1.5	B	7,5	6		BS	4 203 2800 - 1J0 973 713 G	EL	15,2	12,4	6,0	4,0	18,5	15,7	7806076	1000
FEP2 x 3-1,5	C	7,5	6			1J0 973 713	EL	15,2	12,4	6,0	4,0	18,3	15,5	7806940	1000
FEP2x4-1.5	A	7,5	6			1J0 973 714	EL	19,5	12,7	6,0	4,0	22,6	15,8	7807131	1000
FEP2 x 7-1,5	B	10	8,5			4 203 2500-SX0 973 717	EL	31,5	15,7	6,0	4,0	34,5	18,7	7807174	1000
FEP x 27-1,5	B	10	8,5		HS	4 203 2500-SX0 973 717	EL	31,5	15,7	6,0	4,0	34,5	18,7	7807207	1000
FEP x 27-1,5	C	10	8,5			4 203 2500-SX0 973 717	EL	31,5	15,7	6,0	4,0	34,1	20,2	7807624	500
FEP3-1,5	B	8,5			45°	1J0 973 703	EL	13,7	8,8	6,0	4,0	17,1	12,1	7807199	1000
FEP3-1,5	C	7,5	6			1J0 973 703	EL	13,7	8,8	6,0	4,0	17,1	12,1	7807203	1000
FEP3-2,8	A	4,5	4,5			1J0 973 723-1K0 973 202	EL	19,3	9,4	7,0	4,0	23,1	13,1	7807768	1000
FEP3-2,8	B	4,5	4,5			1J0 973 723-1K0 973 202	EL	19,3	9,4	7,0	4,0	23,1	13,1	7806860	1000
FEP5-1.5	C	7,5	6				-	-	-	-	-	-	-	7807111	1000
FEP5-4,8	A	10	8,5				-	-	-	-	-	-	-	7806075	500
FEP6-2,8	C	10	8,5			1J0 973 726	EL	37,3	12,4	7,0	4,0	41,1	16,1	7807629	500
GHW12	D	13	11		35°	3944540	RD	31,0	31,0	10,0	3,8	34,0	34,0	7807244	1000
GHW12	D	17	15		35°	3944540	RD	31,0	31,0	10,0	3,8	34,0	34,0	7807480	500
GHW21	A	17	15				RE	43,9	19,9	17,3	4,7	52,2	28,2	7807246	500
GHW2	A	8,5					-	-	-	-	-	-	-	9805702	2000
GHW2-MKR	A	8,5			N	18286	EL	14,1	9,2	13,0	4,0	17,1	12,2	7807025	1000
GHW2-MKR	A	8,5			SES-N	18286	EL	14,1	9,2	13,0	4,0	17,1	12,2	7807027	1000
GHW3	A	8,5					-	-	-	-	-	-	-	9805706	1000
GHW4-MKR	A	8,5			N	18284	RE	14,9	10,1	14,0	4,0	21,2	16,6	7807029	1000
GHW4-MKR	A	8,5			SES-N	18284	RE	14,9	10,1	14,0	4,0	21,2	16,6	7807031	1000
GHW7	D	13	11		VF	16131	RD	18,0	18,0	18,0	1,5	19,7	19,7	7807062	500
HFM6	C	4,5	4,5				-	-	-	-	-	-	-	7806600	250
HM1/2-MLK	A	glatki / smooth			CPA	A0475459428	RR	11,9	7,9	5,6	1,5	14,8	10,8	7807781	1000
HM1/2-MLK	A	glatki / smooth			CPA	A0475459428	RR	11,9	7,9	5,6	1,5	14,8	10,8	7807787	1000
HM2	A	4,5	4,5				-	-	-	-	-	-	-	7807467	500
HM2	A	7,5	6		CABIND		RR	12,8	10,8	-	3,2	14,2	12,2	7807655	1000
HM2-MLK	A	4,5	4,5			705-160	RE	11,9	7,9	5,6	1,5	14,8	10,8	7806995	1000
HM2-MLK	B	4,5	4,5		CPA	705-160	RE	11,9	7,9	5,6	1,5	14,8	10,8	7806796	1000
HM2-MLK	C	4,5	4,5		CPA	705-160	RE	11,9	7,9	5,6	1,5	14,8	10,8	7806793	1000
HM3	C	4,5	4,5				-	-	-	-	-	-	-	7807468	1000
HM3-MLK	A	4,5	4,5			705-162	RE	15,9	7,9	5,5	1,5	18,9	10,8	7806801	1000
HM3-MLK	B	4,5	4,5		CPA	705-162	RE	15,9	7,9	5,5	1,5	18,9	10,8	7806803	1000
HM3-MLK	B	7,5	6		CPA	705-162	RE	15,9	7,9	5,5	1,5	18,9	10,8	7807831	1000
HM3-MLK	C	4,5	4,5		CPA	705-162	RE	15,9	7,9	5,5	1,5	18,9	10,8	7806794	1000
HM3-MLK	C	7,5	6		CPA	705-162	RE	15,9	7,9	5,5	1,5	18,9	10,8	7806581	1000
HM4	A	7,5	6		CAND		RR	11,7	4,6	1,5	1,5	13,7	7,0	7806587	1000
HM4	B	7,5	6				-	-	-	-	-	-	-	7807521	1000
HM4	B	7,5	6		180°		-	-	-	-	-	-	-	7807522	1000
HM4	C	4,5	4,5				-	-	-	-	-	-	-	7806560	1000
HM4-MLK	A	4,5	4,5			705-164	RR	21,3	9,3	5,5	1,5	24,3	12,3	7806589	1000
HM4-MLK	A	7,5	6			705-164	RR	21,3	9,3	5,5	1,5	24,3	12,3	7806806	1000
HM4-MLK	B	7,5	6		CPA	705-362	RR	21,3	9,3	5,5	1,5	24,3	12,3	7806807	1000
HM4-MLK	C	7,5	6		CPA	705-164	RR	21,3	9,3	5,5	1,5	24,3	12,3	7806808	1000
HM5	C	4,5	4,5				-	-	-	-	-	-	-	7806914	500
HM5-MLK	A	7,5	6			705-181	RE	25,3	9,3	5,5	1,5	28,3	12,3	7807780	1000
HM5-MLK	B	7,5	6			705-181	RE	25,3	9,3	5,5	1,5	28,3	12,2	7806795	1000
HM5-MLK	C	10	8,5			705-181	RE	25,3	9,3	5,5	1,5	28,3	12,2	7807788	1000

Utikač	oblik	profil NW standardni + UFW	AHW	High Flex	Svojstva	Broj utikača	oblik	Osnovne dimenzije Ls	Bs	Hs	Ps	La	Ba	broj artikla	JP kom.
Connector	Form	Contour NW normal + UFW	AHW	High Flex	Feature	Connector No.	Form	Main Dimensions Ls	Bs	Hs	Ps	La	Ba	Art. no.	PU pcs.
HM5-MLK	C	7,5	6			705-181	RE	25,3	9,3	5,5	1,5	28,3	12,2	7806790	1000
ITT50-APD	D	22	19			120110-0075	RD	33,8	33,8	-	-	36,4	36,4	7807680	500
ITT50-APD	D	26	26			120110-0075	RD	33,8	33,8	-	-	36,4	36,4	7807679	500
JETRONIC2	A	8,5 UFW					-	-	-	-	-	-	-	9805711	500
JETRONIC3	A	10 UFW					-	-	-	-	-	-	-	9805710	500
KBR2	B	glatki / smooth			50L	4B0 971 955	EL	31,4	19,7	12,6	3,5	34,5	23,0	7807143	500
KS	A	13	11				RD							7806874	1000
KS	D	13	11				RD	-	-	-	-	-	-	7806863	1000
KTL	B	7,5	6				RE	-	-	-	-	-	-	7806500	1000
LK10	B	8,5					RE	27,3	10,2	3,0	4,0	27,4	13,3	7807022	1000
LK16	A	8,5				09 4307 01	RD	-	-	-	-	-	-	7807018	500
LK20	D	13	11			09 4320 01	RD	26,3	26,3	5,0	3,7	31,0	31,0	7807090	500
LK20	D	17	15		EHK22	09 4320 01	RD	26,3	26,3	5,0	3,7	31,0	31,0	7807636	500
LK 25	C			19	35°	09 4025 ..	RE	66,5	22,5	-	-	70,0	25,0	7807637	250
LK2	C	4,5	4,5		180°		-	-	-	-	-	-	-	7806853	1000
LK2-MT	A+D	4,5	glatki / smooth				-	-	-	-	-	-	-	7806915	500
LK2-MT	A	4,5	4,5			09 4404 ..	EL	14,2	9,1	7,0	5,0	18,0	12,9	7807840	1000
LK2-MT	-	4,5	4,5		180°		-	-	-	-	-	-	-	7807841	500
LK23-MLK1,2	C	7,5	6			09 4421 ..	RE	13,6	9,6	2,0	2,0	17,0	11,4	7807010	1000
LK3-MT	B	4,5	4,5			09 4403 ..	EL	19,2	11,2	7,0	5,0	23,0	15,0	7807806	1000
LK3-SLK2,8	C	4,5	4,5		MS	09 44149 .	-	-	-	-	-	-	-	7806917	1000
LK4-LKS1,5	A	7,5	6				-	-	-	-	-	-	-	7806925	1000
LK4-SLK2.8	B	7,5	6			53644 0	RR	21,6	6,6	7,0	5,0	25,8	10,8	7806910	1000
LK4-SLK2,8	B	7,5	6		glatki / smooth		-	-	-	-	-	-	-	7806912	500
LK5	C	7,5	6			09 44150 .	EL	27,4	11,5	7,0	5,0	31,0	15,2	7807271	1000
MTA2	B	4,5	4,5		36°	1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807710	n.u./o.r.
MTA4	A	10	8,5		SL		EL	21,6	9,0	7,0	2,0	25,1	12,5	7806584	1000
PASS05	C	glatki / smooth					RE	26,8	13,5	-	-	-	-	7807760	1000
RB16	A	13	11			1 928 404 190	RD	-	-	-	-	-	-	7807176	1000
RB16	A	8,5				1 928 404 190	RD	-	-	-	-	-	-	7807175	1000
RB2-JT	A	4,5	4,5				EL	14,0	9,0	13,6	5,0	17,2	12,2	7806869	1000
RB2-JT	A	8,5 UFW					-	-	-	-	-	-	-	9805711	500
RB2-KPT1,5	C	4,5	4,5			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807681	1000
RB2-KPT1.5	C	4,5	4,5			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807835	200
RB2-KPT	A	glatki / smooth				1 928 403 874	EL	11,5	7,0	7,0	2,0	20,0	10,6	7807651	1000
RB2-KPT	A	4,5	4,5			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807611	1000
RB2-KPT	A	4,5	4,5		PA46	1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7806116	200
RB2-KPT	A	7,5	6			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807612	1000
RB2-KPT	B	4,5	4,5			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807069	1000
RB2-KPT	B	7,5	6			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807079	1000
RB2-KPT	C	4,5	4,5		35L	1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807634	1000
RB2-KPT	C	7,5	6			1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807078	1000
RB2-KPT	C	8,5			NE	1 928 403 874	EL	11,5	7,0	7,0	2,0	15,1	10,6	7807784	500
RB35	A	26	26			1 928 401 987	RD	28,5	28,5	9,8	-	32,0	32,0	7807228	500
RB35	D	17	15			1 928 401 987	RD	28,5	28,5	9,8	-	32,0	32,0	7807102	1000
RB3-JT	A	4,5	4,5			1928 402 4..	EL	19,0	9,0	13,6	5,0	23,2	13,8	7807779	1000
RB3-JT	A	7,5	6			1928 402 4..	EL	19,0	9,0	13,6	5,0	23,2	13,8	7806870	1000
RB3-JT	A	8,5 UFW					-	-	-	-	-	-	-	9805710	500
RB3-KPT	A	glatki / smooth				1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807652	1000
RB3-KPT	A	4,5				1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807623	1000
RB3-KPT	A	7,5	6			1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807625	1000
RB3-KPT	B	4,5	4,5			1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807071	1000
RB3-KPT	B	7,5	6			1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807608	1000
RB3-KPT	C	4,5	4,5			1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807072	1000
RB3-KPT	C	7,5	6			1 928 403 966	EL	16,5	7,0	10,3	2,0	20,0	10,6	7807609	1000
RB42	A	glatki / smooth				1 928 403 943	-	-	-	-	-	-	-	7807684	500
RB4-JT	B	7,5	6			1 928 402 5..	EL	24,0	9,8	-	5,0	28,5	14,0	7807694	100
RB4-KPT	A	4,5	4,5			1 928 403 736	EL	21,6	9,0	7,0	2,0	25,0	12,6	7807643	1000
RB4-KPT	A	7,5	6			1 928 403 736	EL	21,6	9,0	7,0	2,0	25,0	12,6	7807644	1000
RB4-KPT	B	4,5	4,5			1 928 403 736	EL	21,6	9,0	7,0	2,0	25,0	12,6	7807810	1000
RB4-KPT	B	7,5	6			1 928 403 736	EL	21,6	9,0	7,0	2,0	25,0	12,6	7807776	1000
RB4-KPT	C	4,5	4,5			1 928 403 736	EL	21,6	9,0	7,0	2,0	25,0	12,6	7806864	1000
RB4-KPT	C	7,5	6			1 928 403 736	EL	21,6	9,0	7,0	2,0	25,0	12,6	7807064	1000
RB5	B	4,5	4,5			1 928 A00	RE	17,0	19,5	2,0	2,0	13,6	16,4	7807727	1000
RB5	B	7,5	6			1 928 A00	RE	17,0	19,5	2,0	2,0	13,6	16,4	7807729	1000
RB5-KPT	A	4,5	4,5			1 928 403 738	EL	26,6	9,0	7,0	2,0	30,1	12,6	7807186	1000
RB5-KPT	A	7,5	6			1 928 403 738	EL	26,6	9,0	7,0	2,0	30,1	12,6	7807179	1000
RB5-KPT	B	7,5	6			1 928 403 738	EL	26,6	9,0	7,0	2,0	30,1	12,6	7807073	1000

Utikač / Connector	oblik / Form	profil NW standardni + UFW / Contour NW normal + UFW	AHW / AHW	High Flex / High Flex	Svojstva / Feature	Broj utikača / Connector No.	oblik / Form	Osnovne dimenzije / Main Dimensions Ls	Bs	Hs	Ps	La	Ba	broj artikla / Art. no.	JP kom. / PU pcs.
RB5-KPT	C	7,5	6			1 928 403 738	EL	26,6	9,0	7,0	2,0	30,1	12,6	7807074	1000
RB6-KPT	C	7,5	6			1 928 403 740	EL	31,4	8,8	7,4	2,0	35,0	12,5	7807183	1000
RB89	A	22	19			1 928 404 184	RD	-	-	-	-	-	-	7807177	500
RB89	D	26	26			1 928 404 184	RD	-	-	-	-	-	-	7807404	1000
SA21	A	10	8,5			-	RD	19,4	19,4	-	-	21,5	21,5	7807263	100
SA21	A	4,5	4,5			-	RD	19,4	19,4	-	-	21,5	21,5	7807666	1000
SA21	A	8,5				-	RD	19,4	19,4	-	-	21,5	21,5	7807266	500
SA21	A	8,5			NOVO/NEW	-	RD	19,4	19,4	-	-	21,5	21,5	7807665	500
SA21	D	10	8,5			-	RD	19,4	19,4	-	-	21,5	21,5	7807265	100
SA21	D	4,5	4,5			-	RD	19,4	19,4	-	-	21,5	21,5	7807668	1000
SIEM28/52	B			19		V23542-C1028-B300	-	-	-	-	-	-	-	7807180	500
SUM2	A	7,5			45°	6189-0786	-	-	-	-	-	-	-	7807626	1000
TYCO2	A	glatki / smooth				1813029-1	RR	-	-	-	-	-	-	7806629	100
TYCO2	A	4,5	4,5				-	-	-	-	-	-	-	7806073	100
TYCO2-MCP	A	8,5 UFW					-	-	-	-	-	-	-	7806630	n.u./o.r.
TYCO3	B	7,5	6				-	-	-	-	-	-	-	7806072	500
DRUCKFÜHLER-NW 7,5	-	7,5	6				-	-	-	-	-	-	-	7807639	250

Kutni komad — Angle-piece



profil NW standardni + UFW / Contour NW normal + UFW	AHW / AHW	Svojstva / Feature	upotrebljiv sa zaštitnim pokrovom za utikače / useable with connector interface	oblik / Form	Osnovne dimenzije / Main Dimensions Ls	Bs	Hs	Ps	La	Ba	broj artikla / Art. no.	JP kom. / PU pcs.
4,5	4,5		7807656, 7807790 7807652, 7807791 7807651, 7807792 7807695, 7806590	RD	8,8	8,8	-	1,0	10,5	10,5	7807642	1000
7,5	6		7807656, 7807790 7807652, 7807791 7807651, 7807792 7807695, 7806590	RD	8,8	8,8	-	1,0	10,5	10,5	7807690	1000
4,5	4,5		7807656, 7807790 7807652, 7807791 7807651, 7807792 7807695, 7806590	RD	8,8	8,8	-	1,0	10,5	10,5	7806759	1000
4,5	4,5	180°	7807656, 7807790 7807652, 7807791 7807651, 7807792 7807695, 7806590	RD	8,5	8,5	2,5	1,0	11,1	11,1	7807834	100


Zaštita od tekstila

Textile Protection

	stranica		page
Zaštitne trake		**Protective Strips**	
bez flisa, sa zatvaranjem čičkom	112	no Fleece with Velcro fastening	112
sa flisom, sa zatvaranjem čičkom	112	with Fleece, with Velcro fastening	112
sa flisom, sa zatvaranjem čičkom, sa samoljepljivom trakom na poleđini	112	with Fleece, with Velcro fastening, with adhesive strip on the back	112
za visoke temperature	113	Heatreflecting	113
EMC zaštita	113	EMC Protection	113
Upute za upotrebu zaštitnih traka	114	**Assembly Instruction for Protective Strips**	114
Zaštita kontakata	115	**Contact Protection**	115

Zaštitne trake

Protection Strips



bez flisa / no Fleece



sa flisom / with Fleece

RoHS

Materijal:
1/5: montažna traka:
modificirani akrilat
2: zatvaranje: čičak
3: poliester velur
4: flis: PET

Radna temperatura:
-40°C do 105°C

Izvedbe:
ostale dimenzije na upit

Važna napomena:
Broj artikla se odnosi i na pakiranje u roli i na kontejner.
Prilikom naručivanja naznačite željenu jedinicu pakiranja (kontejner ili rolu)!

Prednost zatvaranje čičkom:
- jednostavno rukovanje
- mogućnost visestrukog korištenja

Svojstva:
- lagano za montažu
- povećana snaga prianjanja
- prema OEM/VDA specifikaciji
- vatrootporne
- najviši nivo zaštite od abrazije
- najviši nivo izolacije zvuka
- ljepljive trake trebaju se stavljati na suhu i čistu površinu, bez masnoća i prašine
- preporučena temperatura pri montaži za sve materijale cca. 15°-20°C

Upotreba:
- zaštita od abrazije i zveckanja unutar karoserije

Tvornička ugradnja:
Audi, BMW, Opel, Škoda, Saab, Porsche, MAN

Material:
1/5: Mounting strip:
Modified Acrylate
2: Closing strip: Velcro
3: Polyester velour
4: Fleece: PET

Temperature range:
-40°C to 105°C

Designs:
Further variations on request

Important Note:
The Art.-No. refer to role and container package units.
Therefore state the requested PU (role or container) when ordering!


Advantage Velcro fastening:
- Easy to handle
- Reclosable

Characteristics:
- Easy mounting
- Higher adhesive force
- acc. to OEM/VDA Spec.
- flame retardant
- highest category for abrasion protection
- highest category for sound insulation
- The adhesive should be applied to a dry clean surface, free of dust and grease
- Recommended process temperature for all materials approx. 15°-20°C


Applications:
- Abrasion- and rattle protection for harnesses in the body section

OEM release:
Audi, BMW, Opel, Skoda, Saab, Porsche, MAN

bez flisa / no Fleece



sa flisom / with Fleece




bez flisa, sa zatvaranjem čičkom / no Fleece, with Velcro fastening

širina mm Widths mm	za snop vodiča do Ø mm for cable bundle to Ø mm	broj artikla Art. no.	JP rola m PU role m	JP kontejner m PU Container m
30,0	do/to 4	1882003	250	3750
50,0	> 4 do/to 10	1882005	250	2750
70,0	>10 do/to 15	1882007	250	2250
100,0	>15 do/to 23	1882010	250	1500
120,0	>24 do/to 29	1882012	250	1250
140,0	>23 do/to 35	1882014	250	1250
160,0	>36 do/to 41	1882016	250	1000
180,0	>42 do/to 47	1882018	250	1000
200,0	>48 do/to 53	1882020	250	1000

sa flisom, sa zatvaranjem čičkom / with Fleece, with Velcro fastening

30,0	do/to 4	1880003	200	3000
50,0	> 4 do/to 10	1880005	200	2200
70,0	>10 do/to 15	1880007	200	1800
100,0	>15 do/to 23	1880010	200	1200
120,0	>24 do/to 29	1880012	200	1000
140,0	>23 do/to 35	1880014	200	1000
160,0	>35 do/to 41	1880016	200	800
180,0	>42 do/to 47	1880018	200	800
200,0	>48 do/to 53	1880020	200	800

Rješenja po specifikacijama klijenata / Customer specific Solutions





Zaštitne trake sa flisom, sa zatvaranjem čičkom, sa samoljepljivom trakom na poleđini
Protective Strips with fleece, with velcro fastening, with adhesive strip on the back

širina mm Widths mm	dužina mm Length mm	za snop vodiča do Ø mm for cable bundle to Ø mm	broj artikla Art. no.	JP karton kom. PU box pcs.
50,0	580,0	>4 do/to 10	1881500	500

Zaštitne trake za visoke temperature

Protection Strips Heatreflecting


izvana / Outside


iznutra / Inside

RoHS

Materijal:
1: tkanina:
staklena vlakna
2/3: montažna traka/zatvaranje:
modificirani akrilat
4: laminat:
aluminj

Radna temperatura:
-30°C do 240°C
kratkotrajno: 450°C

Izvedbe:
ostale dimenzije na upit


Svojstva:
- ljepljive trake trebaju se stavljati na suhu i čistu površinu, bez masnoća i prašine
- preporučena temperatura pri montaži za sve materijale cca. 15°-20°C

Material:
1: Cloth:
Glass filament cloth
2/3: Mounting strip/Closing strip:
Modified Acrylate
4: Lamination:
Aluminium

Temperature range:
-30°C to 240°C
short-term: 450°C

Designs:
Others on request


Characteristics:
- The adhesive should be applied to a dry clean surface, free of dust and grease
- Recommended process temperature for all materials approx. 15°-20°C




tip Type	za snop vodiča do Ø mm for cable bundle to Ø mm	broj artikla Art. no.	JP PU
45,0	> 4 do/to 10	1894005	na upit / on request
70,0	>10 do/to 15	1894007	na upit / on request
95,0	>15 do/to 23	1894010	na upit / on request
140,0	>23 do/to 35	1894014	na upit / on request

Zaštitne trake za EMC zaštitu

Protection Strips for EMC Protection





RoHS


Svojstva:
- Visoke zaštitne vrijednosti protiv djelovanja EM valova postignute su laminiranjem refleksnim slojem integriranim u tekstilnu traku.
- Postignute vrijednosti prigušivanja mjerene su prema ASTM D 4935-89 i IEEE 299-1997 u HF, Institutu mikrovalne i radarske tehnologije Univerziteta Oružanih snaga.
- Postignute zaštitne vrijednosti dostižu do 99,99 % u poljima visokih frekvencija.

Features:
- High screen values against radiation can be achieved by laminating a reflecting layer into the cable protection system.
- The achievable damping values were measured in accordance with ASTM D 4935-89 and IEEE 299-1997 at the HF, Microwave and Radar Technology Institute of the University of the Armed Forces.
- The achievable screen values reached up to 99,99 % in high frequency fields.

za snop vodiča do Ø mm for cable bundle to Ø mm	broj artikla Art. no.	JP PU
na upit / on request	na upit / on request	na upit / on request


Upute za upotrebu zaštitnih traka


Assembly Instruction for Protection Strips



1 Držite zaštitnu traku u jednoj ruci.
2 Presavinite zaštitnu traku sa samoljepljivom trakom prema dolje.
3 Palcem druge ruke odstranite zaštitni papir.
4 **Sklopite zaštitnu traku bez napinjanja.**
5 Lagano stisnite traku s ljepljivom površinom.


1 Hold protection strip in one hand.
2 Bend protection strip with adhesive tape downwards.
3 Remove protective paper with the thumb of the other hand.
4 **Assemble protection strip without tension!**
5 Press the closure adhesive tape firmly.






A montažna traka
B pomoćna samoljepljiva traka
C samoljepljiva traka za zatvaranje ili zatvaranje čičkom
D PUR-pjena

A assembly - adhesive tape
B relief - adhesive tape
C closure - adhesive tape or Velcro-fastening
D PUR-foam





Važne napomene:

– Upotrebljavati samo pri sobnim temeraturama.
– Zaštitni papir uklonite neposredno prije lijepljenja.
– Održavajte samoljepljivu traku i vodiče suhima i bez masnoća.
– Ne dirajte samoljepljivu traku.
– Oba kraja pjene trebaju se preklapati prilikom sklapanja.

Zaštitne trake sa ljepilom mogu se koristiti samo jednokratno!

Important Remarks:

– Process at room temperature only
– Remove protective paper right before sticking together
– Keep adhesive tape and harness dry and free from grease
– Do not touch adhesive tape
– Both foam ends have to overlap during their assembly

The protection strip with adhesive can only be used once!





2.4

Zaštita kontakata

Contact Protection





RoHS

Materijal:
poliestervelur visoko otporan na abraziju

Svojstva:
- lagano za montažu zbog vezice na čičak
- jednostavno rukovanje
- višestruko korištenje do 250 puta
- sa ušicom za vješanje


Upotreba:
- Zaštita montiranih vodiča prilikom sklapanja

Material:
high abrasion-proof polyestervelour


Characteristics:
- Easy assembling through velcro cable-tie
- Easy to handle
- re-useable up to 250 times
- with eyelet for hanging up

Applications:
- Protection of mounted wires during Assembly

veličina 1 / Size 1



veličina 2 / Size 2



tip Type	za snop vodiča mm max. for cable bundle mm max.	A mm A mm	B mm B mm	broj artikla crna Art. no. black	JP kom. PU pcs.
veličina 1 / Size 1	35,0	220,00	143,00	1892900	500
veličina 2 / Size 2	50,0	290,00	192,00	1892901	360

2.4

Pribor

Accessories

	stranica		page
Redukcije	118	**Reducers**	118
Spojnice	119	**Connectors**	119
Pričvršćivanje:		**Fixings:**	
Držač rebrastih cijevi	120	Corrugated Tube Holder	120
Cijevne obujmice	121	Tube Clips	121
Obujmice krajnje	121	End Clips	121
Cijevne obujmice sa čepom	122	Clips + Mount	122
Cijevne obujmice sa montažnom pločicom i metalnim umetkom	123	Clip with mounting plate and metal insert	123
Obujmice	124	Clamps	124
Tuljak za ojačanje	125	**Stabilizing Ferrules**	125
Čep/Gumeni završetak	126	**End cap/End sleeve**	126
Kabelske vezice:		**Cable ties:**	
Euro-kabelske vezice	127	Euro Cable-ties	127
UV-stabilne kabelske vezice	128	UV-stabilised Cable ties	128

Redukcije

Reducers

RoHS

Materijal:
poliamid 66
poliamid 46 na upit
* Elastomer na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C

Boje/izvedbe:
• crna

Upotreba:
za postavljanje u rebraste cijevi, razdjelnike, spojnice

Material:
Polyamide 66
Polyamide 46 on request
* Elastomere on request

Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black

Applications:
To place in Corrugated tubes, Manifolds, Connectors

oblik A / Form A



oblik B / Form B




oblik C / Form C




oblik D / Form D




oblik A / Form A




oblik B / Form B



oblik C / Form C



oblik D / Form D



oblik Form	odgovara za profil rebraste cijevi NW standardni + UFW suitable for corrugated tube profile NW normal + UFW	AHW	b mm b mm	l mm l mm	broj artikla Art. no.	JP kom. PU pcs.
A	8,5 → 4,5		11,7	9,0	7807270	2000
A	10 → 4,5	8,5 - 4,5	12,7	9,0	7807272	2000
A	10 → 7,5	8,5 - 6	13,1	7,5	7807276	2000
A	13 → 10	11 - 8,5	16,0	7,5	7807280	2000
A	13 → 7,5	11 - 6	16,0	7,5	7807278	500
A	17 → 13	15 - 11	21,3	8,5	7807283	500
A	17 → 13	15 - 11	21,3	19,0	7807320	na upit / on request
A	26 → 17	26 - 15	31,7	19,2	7807339	na upit / on request
A	22 → 17	19 - 15	25,8	9,5	7807282	2000
A *)	17 → Ø9	15 - Ø9	21,5	8,0	7807605	na upit / on request
B	17 → 2 x 4,5	15 - 2 x 4,5	21,3	2,5	7807289	500
B	22 → 2 x 7,5	19 - 2 x 6	25,0	2,6	7807290	1000
B	22 → 8,5 - 7,5		25,0	2,6	7807291	1000
B	22 → 2 x 4,5	19 - 2 x 4,5	25,9	2,6	7807187	1000
B	22 → 7,5 - 4,5	19 - 6 - 4,5	25,9	2,6	7807765	na upit / on request
C	17 → 3 x 4,5	15 - 3 x 4,5	21,3	2,5	7807293	500
C	22 → 2 x 4,5 - 7,5	19 - 2 x 4,5 - 6	25,9	2,6	7807697	na upit / on request
C	22 → 2 x 7,5 - 4,5	19 - 2 x 6 - 4,5	25,9	2,6	7807761	na upit / on request
C	22 → 3 x 4,5	19 - 3 x 4,5	25,9	2,6	7807698	na upit / on request
C	22 → 3 x 7,5	19 - 3 x 6	25,9	2,6	7807292	1000
C	29 → 3 x 8,5		34,8	2,3	7807295	1000
D	10 → 8,5		13,1	2,1	7807288	500
D	17 → 13	15 - 11	21,4	2,5	7807296	1000
D	22 → 13	19 - 11	25,9	2,6	7807294	1000
D	26 → 22	26 - 19	31,7	2,4	7807654	500
D	10 → 4,5	8,5 - 4,5	13,2	2,1	7807299	1000
D	10 → 7,5	8,5 - 6	13,2	2,1	7807297	na upit / on request
D	14 → 13	X - 11	18,6	2,0	7807766	na upit / on request

Spojnice

Connectors

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C


Boje/izvedbe:
- crna
- obuhvat izvana

Material:
Polyamide 66
Polyamide 46 on request


Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
- Black
- Outside gripping


spojnica ravna
Connector straight



spojnica kutna 90°
Connector 90°-angle



spojna čahura /
Connecting sleeve




Izvedba	obuhvat izvana	zabravljivanje obuhvatom	glatki	odgovara za profil rebraste cijevi NW Normal +UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	b mm	l mm	broj artikla	JP kom.
				suitable for corrugated tube profile NW							
Design	outside gripping	Clamp lock	smooth	normal +UFW	AHW	self closing L-Profile	lockable V-Profile	b mm	l mm	Art. no.	PU pcs.
Spojnica / Connector											
ravna / straight	✓	✓		22-13	19-11	22-13	19-11	32,4	21,0	7807604	1000
kutna 90°/ 90° angle	✓	✓		8,5-8,5		8,5-8,5		32,4	30,8	7807397	500
kutna 90°/ 90° angle	✓	✓		10-10	8,5-8,5	10-10	8,5-8,5	28,0	35,2	7807398	100
kutna 90°/ 90° angle	✓	✓		13-13	11-11	13-13	11-11	30,5	37,5	7807399	500
kutna 90°/ 90° angle	✓	✓	✓	13	11	13	11	30,5	37,5	7807395	500
kutna 90°/ 90° angle	✓	✓		17-17	15-15	17-17	15-15	38,3	43,7	7807400	500
kutna 90°/ 90° angle	✓	✓		22-22	19-19	22-22	19-19	44,3	49,1	7807401	250
kutna 90°/ 90° angle	✓	✓		26-17	26-15	26-17	26-15	42,2	49,1	9807391	500
kutna 90°/ 90° angle	✓	✓		26-22	26-19	26-22	26-19	42,2	49,1	7807393	1000
kutna 90°/ 90° angle	✓	✓		26-26	26-26	26-26	26-26	48,3	54,3	7807403	250
Spojna čahura / Connecting sleeve											
sa obuhvatnim dijelom/ with clamping space	✓	✓		10		10				9805591	100

2.5

Držač rebrastih cijevi

Corrugated Tube Holder

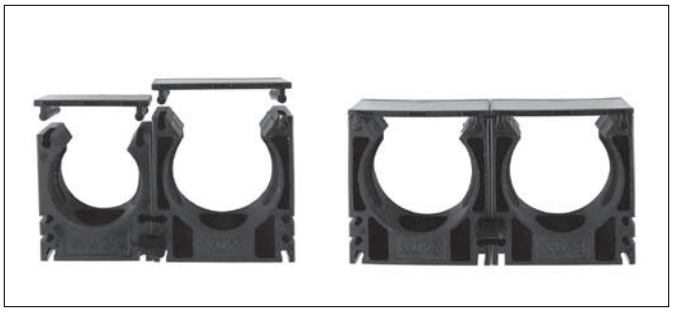

RoHS

Materijal:
poliamid PA6, prema UL94: V-2

Radna temperatura:
-40°C do 105°C
kratkotrajno: 150°C

Boje/izvedbe:
- crna
- siva

Svojstva:
- za montažu u seriji
- složivo u niz ili jedni na druge
- za brzu, laku i sigurnu montažu
- rebrasto učvršćivanje kao zaštita od izvlačenja
- rebrasta cijev je okretna oko svoje osi
- bez halogena

Upotreba:
- izrada strojeva i aparata
- robotika
- autoindustrija
- proizvodnja šinskih vozila


Material:
Polyamide PA6, V-2 accord. to UL94

Temperature range:
-40°C to 105°C
short-term: 150°C

Colour(s)/Designs:
- Black
- Grey

Characteristics:
- for series mounting
- stackable
- for quick, easy and safe mounting
- rib fixation as traction relief
- corrugated tube is twistable arround its own axis
- free of halogen

Applications:
- mechanical engineering and facility constructions
- robot engineering
- automotive industry
- railway engineering



Držač rebrastih cijevi bez poklopca / Corrugated Tube Holder no cap

za NW for NW	B mm B mm	H mm H mm	h mm h mm	L mm L mm	d mm d mm	broj artikla crna Art. no. black	broj artikla siva Art. no. grey	JP kom. PU pcs.
7,5	20,0	18,0	12,0	20,0	4,2	8221050	8221150	100
10	20,0	23,0	15,5	20,0	5,5	8221051	8221151	100
12+13	22,0	26,0	17,1	20,0	5,5	8221052	8221152	50
14+16	28,0	33,0	21,1	20,0	6,5	8221053	8221153	50
17	28,0	33,0	21,4	20,0	6,5	8221054	8221154	50
23	35,0	40,0	24,8	20,0	6,5	8221055	8221155	50
29	43,0	45,0	26,8	20,0	6,5	8221056	8221156	30
37	54,0	53,0	30,8	20,0	6,5	8221057	8221157	20
50	68,0	66,0	37,8	20,0	6,5	8221058	8221158	20


Poklopac

za držač rebrastih cijevi

Cap

for Corrugated Tube Holder





za NW for NW	broj artikla crna Art. no. black	broj artikla siva Art. no. grey	JP kom. PU pcs.
7,5+10	8221250	8221350	100
12+13	8221251	8221351	50
14+16+17	8221252	8221352	50
23	8221253	8221353	50
29	8221254	8221354	30
37	8221255	8221355	20
50	8221256	8221356	20

Spojnica


za držač rebrastih cijevi


Connecting Piece

for Corrugated Tube Holder

Za spajanje držača rebrastih cijevi u niz ili jednih na druge.

To line or staple corrugated tube holders





za NW for NW	broj artikla crna Art. no. black	broj artikla siva Art. no. grey	JP kom. PU pcs.
7,5 - 50	8221400	8221401	100

Cijevne obujmice
Obujmice krajnje

Tube Clips
End Clips

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C

Boje/izvedbe:
- crna
- siva

Svojstva:
- za fleksibilne instalacije
- optimalni spoj za rebraste cijevi

Upotreba:
- za pričvršćivanje rebrastih cijevi ili vodiča na karoseriju itd.

Material:
Polyamide 66
Polyamide 46 on request


Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
- Black
- Grey


Characteristics:
- For flexible installation
- Optimal connection for corrugated tubes

Applications:
- To fix corrugated tubes or harness on body etc.

cijevna obujmica / Tube Clip

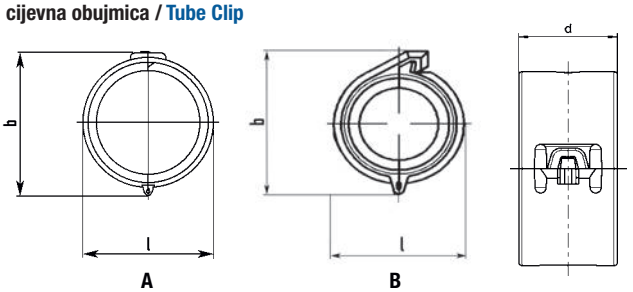

obujmica krajnja / End Clip

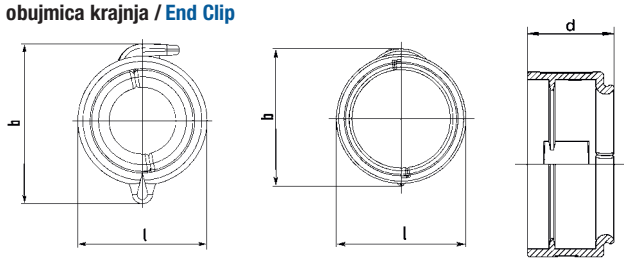

oblik	boja	način spajanja	klizno umetanje na postolje	odgovara za profil rebraste cijevi NW standardni + UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	h mm	b mm	l mm	d mm	broj artikla	JP kom.
				suitable for corrugated tube profile NW									
Form	Colour	plug system	plug socket slide in	normal + UFW	AHW	self closing L-Profile	lock-able V-Profile	h mm	b mm	l mm	d mm	Art. no.	PU pcs.
A	crna / black	cijevna obujmica / Tube Clip		4,5	4,5	4,5			13,0	9,4	13,0	9805940	5000
A	crna / black	cijevna obujmica / Tube Clip		7,5	6	7,5			15,8	12,2	13,0	9805941	5000
A	crna / black	cijevna obujmica / Tube Clip		10	8,5	10	8,5		18,9	15,4	13,0	9805942	5000
A	crna / black	cijevna obujmica / Tube Clip		13	11	13	11		21,6	18,3	13,0	9805943	2500
A	siva / grey	cijevna obujmica / Tube Clip		13	11	13	11		21,6	18,3	13,0	9805951	5000
A	crna / black	cijevna obujmica / Tube Clip		14					24,6	21,3	13,0	9805949	5000
A	siva / grey	cijevna obujmica / Tube Clip		14					24,6	21,3	13,0	9805959	5000
A	crna / black	cijevna obujmica / Tube Clip		17	15	17	15		27,1	23,6	14,5	9805944	5000
A	crna / black	cijevna obujmica / Tube Clip	✓	17	15	17	15		27,4	23,8	22,0	9805908	1000
A	crna / black	cijevna obujmica / Tube Clip		22	19	22	19		31,6	28,3	16,0	9805945	4000
A	crna / black	cijevna obujmica / Tube Clip	✓	22	19	22	19		31,9	28,3	22,0	9805907	1000
A	crna / black	cijevna obujmica / Tube Clip			23HF				35,0	31,8	18,0	9805955	1000
A	crna / black	cijevna obujmica / Tube Clip		26	26	26	26		37,7	34,4	19,0	9805946	1000
A	crna / black	cijevna obujmica / Tube Clip		29		29			41,1	37,5	19,0	9805947	1000
B	crna / black	cijevna obujmica / Tube Clip		8,5		8,5			18,3	15,6	12,7	9805939	5000
C	crna / black	obujmica krajnja / End Clip		4,5	4,5	4,5			12,8	9,8	10,1	9805935	1000
C	crna / black	obujmica krajnja / End Clip		7,5	6	7,5			15,6	12,6	10,5	9805936	1000
D	crna / black	obujmica krajnja / End Clip		22	19	22	19		32,3	28,3	13,3	9805938	1000

2.5

Obujmice sa čepom

Clips Mounts

RoHS

Materijal:
poliamid 66
poliamid 46 na upit

Radna temperatura:
-40°C do 135°C
500 h: -40°C do 150°C

Boje/izvedbe:
• crna

Svojstva:
• za fleksibilne instalacije
• optimalni spoj za rebraste cijevi

Upotreba:
• za pričvršćivanje rebrastih cijevi ili vodiča na karoseriju itd.


Material:
Polyamide 66
Polyamide 46 on request

Temperature range:
-40°C to 135°C
500 h: -40°C to 150°C

Colour(s)/Designs:
• Black

Characteristics:
• For flexible installation
• Optimal connection for corrugated tubes

Applications:
• To fix corrugated tubes or harness on body etc.

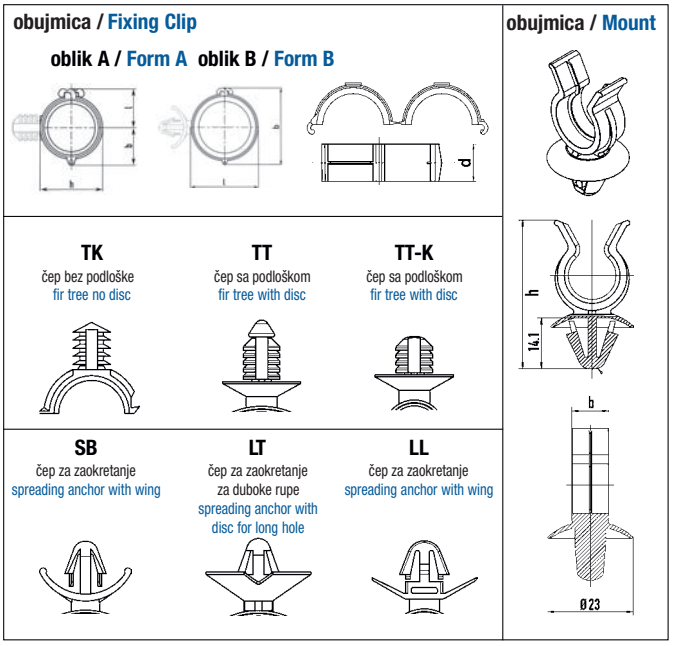

oblik / Form	način spajanja / plug system		debljina lima mm / metal sheet thickness mm	promjer rupe / drill hole diameter mm	odgovara za profil rebraste cijevi NW / suitable for corrugated tube profile NW: standardni + UFW / normal + UFW	AHW	samozatvarajući L-Profil / self closing L-Profile	zabravljujući V-Profil / lockable V-Profile	h mm	b mm	l mm	d mm	broj artikla / Art. no.	JP kom. / PU pcs.
A	obujmica / Fixing Clip		-	-	4,5	4,5	4,5		10,2	5,5	7,2	13,0	9805917	1000
A	obujmica / Fixing Clip		-	-	7,5	6	7,5		13,2	7,0	8,7	13,0	9805911	1000
A	obujmica / Fixing Clip		-	-	8,5		8,5		14,7	7,8	9,5	13,0	9805912	1000
A	obujmica / Fixing Clip		-	-	10	8,5	10	8,5	15,8	8,3	10,0	13,0	9805913	1000
A	obujmica / Fixing Clip		-	-	13	11	13	11	19,0	10,0	11,7	13,0	9805914	1000
A	obujmica / Fixing Clip		-	-	17	15	17	15	24,0	12,0	14,0	13,0	9805925	1000
A	obujmica / Fixing Clip		-	-	22	19	22	19	28,4	14,6	16,2	13,0	9805916	1000
A	obujmica / Fixing Clip	TK	0,8-5	6,5	4,5	4,5	4,5			13,8	9,8	13,0	9805310	1000
A	obujmica / Fixing Clip	TK	0,8-5	6,5	7,5	6	7,5			16,6	12,6	13,0	9805311	1000
A	obujmica / Fixing Clip	TK	0,8-5	6,5	8,5		8,5			18,4	14,4	13,0	9805312	1000
A	obujmica / Fixing Clip	TK	0,8-5	6,5	10	8,5	10	8,5		19,6	15,6	13,0	9805313	1000
A	obujmica / Fixing Clip	TK	0,8-5	6,5	13	11	13	11		22,5	18,5	13,0	9805314	1000
B	obujmica / Fixing Clip	TT-K	0,8-5	6,5	10	8,5	10	8,5		20,4	16,2	14,9	9805980	5000
B	obujmica / Fixing Clip	TT-K	0,8-5	6,5	10	8,5	10	8,5		19,6	15,6	13,0	9805985	5000
B	obujmica / Fixing Clip	TT-K	0,8-5	6,5	13	11	13	11		22,5	18,5	13,0	9805981	1000
B	obujmica / Fixing Clip	LT	0,5-3	6,2 x 12,2		23HF						13,0	9805962	n.u./o.r.
B	obujmica / Fixing Clip	SB	0,5-3	6,5		23HF						13,0	9805956	1000
B	obujmica / Fixing Clip	TT	0,8-6	6,5		23HF				36,1	31,6	13,0	9805900	1000
B	obujmica / Fixing Clip	TT-K	0,8-5	6,5		23HF				36,1	31,6	13,0	9805978	1000
B	obujmica / Fixing Clip	SB	0,5-3	6,5	4,5	4,5	4,5					13,0	9805961	1000
B	obujmica / Fixing Clip	TT	0,8-6	6,5	4,5	4,5	4,5			14,3	9,8	13,0	9805960	1000
B	obujmica / Fixing Clip	TT-K	0,8-5	6,5	4,5	4,5	4,5			14,3	9,8	13,0	9805965	1000
B	obujmica / Fixing Clip	SB	0,5-3	6,5	7,5	6	7,5			17,1	12,6	13,0	9805977	1000
B	obujmica / Fixing Clip	TT	0,8-6	6,5	7,5	6	7,5			17,1	12,6	13,0	9805963	1000
B	obujmica / Fixing Clip	TT-K	0,8-5	6,5	7,5	6	7,5			17,1	12,6	13,0	9805975	1000
B	obujmica / Fixing Clip	TT-K	0,8-5	8	7,5	6	7,5			17,1	12,6	13,0	9805979	1000
	obujmica / Fixing Clip	LL	0,8-5	8 x 15	10	8,5	10	8,5		20,4	16,2	14,9	9805976	1000
Obujmica sa čepom / Mount														
ST	obujmica sa čepom / Mount	ST 8,5	2,0-3,2	8,8-11,0	4,5	4,5	4,5		28,2	9,6			8713195	1000
ST	obujmica sa čepom / Mount	ST 8,5	2,0-3,2	8,8-11,0	8,5		8,5		34,7	9,9			8713196	1000
ST	obujmica sa čepom / Mount	ST 8,5	2,0-3,2	8,8-11,0	10	8,5	10	8,5	37,2	9,9			8713190	1000
ST	obujmica sa čepom / Mount	ST 8,5	2,0-3,2	8,8-11,0	13	11	13	11	41,1	9,9			8713189	1000
ST	obujmica sa čepom / Mount	ST 8,5	2,0-3,2	8,8-11,0	17	15	17	15	48,9	11,8			8713188	1000
ST	obujmica sa čepom / Mount	ST 8,5	2,0-3,2	8,8-11,0	22	19	22	19	48,8	11,9			8713187	1000

Obujmice
sa montažnom pločicom i metalnim umetkom

RoHS

Materijal:
poliamid 46
poliamid 66

Radna temperatura:
poliamid 46: -40°C do 150°C
500 h: -40°C do 175°C

poliamid 66: -40°C do 135°C
500 h: -40°C do 150°C

Boje/izvedbe:
- crna

Svojstva:
- za fleksibilne instalacije
- optimalni spoj za rebraste cijevi
- visoki zatezni moment

Upotreba:
- za pričvršćivanje rebrastih cijevi ili vodiča na karoseriju itd.

Clips
with mounting plate and metal insert

Material:
Polyamide 46
Polyamide 66


Temperature range:
Polyamide 46: -40°C to 150°C
500 h: -40°C to 175°C

Polyamide 66: -40°C to 135°C
500 h: -40°C to 150°C


Colour(s)/Designs:
- Black

Characteristics:
- For flexible installation
- Optimal connection for corrugated tubes
- high tightening torque


Applications:
- To fix corrugated tubes or harness on body etc.



glatki
primjena za glatke cijevi + zrak i tekućine
smooth
for smooth tube + air & fluid applications

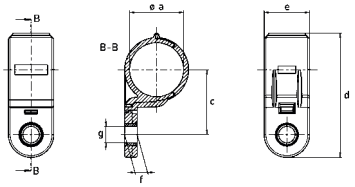

sa unutranjim profilom
za rebraste cijevi
with inner contour
for corrugated tube

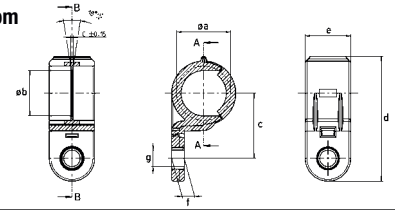

način spajanja	odgovara za profil rebraste cijevi NW standardni + UFW	AHW	samo-zatvarajući L-Profil	zabravljujući V-Profil	g promjer rupe Ø mm	a mm	b mm	c mm	d mm	e mm	f mm	Broj artikla	JP kom.
plug system	suitable for corrugated tube profile NW normal + UFW	AHW	self closing L-Profile	lock-able V-Profile	g drill hole diameter	a mm	b mm	c mm	d mm	e mm	f mm	Art. no.	PU pcs.
		mm											
poliamid 46, glatki / Polyamide 46, smooth													
obujmica / Fixing Clip - KPL	4,5	4,5	4,5		6,5	7,4	-	18,7	35,2	18,0	5,0	9805405	500
obujmica / Fixing Clip - KPL	7,5	6	7,5		6,5	10,2	-	20,1	38,0	18,0	5,0	9805406	500
obujmica / Fixing Clip - KPL	10	8,5	10	8,5	6,5	13,2	-	21,6	41,0	18,0	5,0	9805407	500
obujmica / Fixing Clip - KPL	13	11	13	11	6,5	16,1	-	23,1	43,9	18,0	5,0	9805408	500
obujmica / Fixing Clip - KPL	17	15	17	15	6,5	21,4	-	25,7	49,2	18,0	5,0	9805409	500
obujmica / Fixing Clip - KPL	22	19	22	19		25,9	-	28,0	53,7	18,0	5,0	9805410	500
poliamid 46, sa unutarnjim profilom / Polyamide 46, with inner contour													
obujmica / Fixing Clip - KPL	4,5	4,5	4,5		6,5	7,4	5,7	18,7	35,2	18,0	5,0	9805411	a.a./
obujmica / Fixing Clip - KPL	7,5	6	7,5		6,5	10,2	7,5	20,1	28,0	18,0	5,0	9805412	a.a./
obujmica / Fixing Clip - KPL	10	8,5	10	8,5	6,5	13,2	11,1	21,6	41,0	18,0	5,0	9805413	500
obujmica / Fixing Clip - KPL	13	11	13	11	6,5	16,1	14,1	23,1	43,9	18,0	5,0	9805414	500
obujmica / Fixing Clip - KPL	17	15	17	15	6,5	21,4	17,9	25,7	49,2	18,0	5,0	9805415	500
obujmica / Fixing Clip - KPL	22	19	22	19	6,5	25,9	22,7	28,0	53,7	18,0	5,0	9805416	500
poliamid 66, glatki / Polyamide 66, smooth													
obujmica / Fixing Clip - KPL	4,5	4,5	4,5		6,5	10,2	-	20,1	38,0	18,0	5,0	9805439	500
obujmica / Fixing Clip - KPL	7,5	6	7,5		6,5	13,2	-	21,6	41,0	18,0	5,0	9805440	500
obujmica / Fixing Clip - KPL	10	8,5	10	8,5	6,5	16,1	-	23,1	43,9	18,0	5,0	9805441	500
obujmica / Fixing Clip - KPL	13	11	13	11	6,5	21,4	-	25,7	49,2	18,0	5,0	9805442	500
obujmica / Fixing Clip - KPL	17	15	17	15	6,5	25,9	-	29,0	56,2	21,0	5,0	9805443	250
obujmica / Fixing Clip - KPL	22	19	22	19	6,5	31,8	-	31,9	62,1	21,0	5,0	9805444	250
obujmica / Fixing Clip - KPL	4,5	4,5	4,5		8,5	10,2	-	20,1	38,0	18,0	5,0	9805453	500
obujmica / Fixing Clip - KPL	7,5	6	7,5		8,5	13,2	-	21,6	41,0	18,0	5,0	9805454	500
obujmica / Fixing Clip - KPL	10	8,5	10	8,5	8,5	16,1	-	23,1	43,9	18,0	5,0	9805455	500
obujmica / Fixing Clip - KPL	13	11	13	11	8,5	21,4	-	25,7	49,2	18,0	5,0	9805456	500
obujmica / Fixing Clip - KPL	17	15	17	15	8,5	25,9	-	29,0	56,2	21,0	5,0	9805457	250
obujmica / Fixing Clip - KPL	22	19	22	19	8,5	31,8	-	31,9	62,1	21,0	5,0	9805458	250
poliamid 66, sa unutarnjim profilom / Polyamide 66, with inner contour													
obujmica / Fixing Clip - KPL	4,5	4,5	4,5		6,5	7,4	5,7	18,7	35,2	18,0	5,0	9805431	500
obujmica / Fixing Clip - KPL	7,5	6	7,5		6,5	10,2	7,5	20,1	38,0	18,0	5,0	9805432	500
obujmica / Fixing Clip - KPL	8,5				6,5	12,0	9,4	21,0	39,8	18,0	5,0	9805476	500
obujmica / Fixing Clip - KPL	10	8,5	10	8,5	6,5	13,2	11,1	21,6	41,0	18,0	5,0	9805433	500
obujmica / Fixing Clip - KPL	13	11	13	11	6,5	16,1	14,1	23,1	43,9	18,0	5,0	9805434	500
obujmica / Fixing Clip - KPL	17	15	17	15	6,5	21,4	17,9	25,7	49,2	18,0	5,0	9805435	500
obujmica / Fixing Clip - KPL	22	19	22	19	6,5	25,9	22,7	29,0	56,2	21,0	5,0	9805436	250
obujmica / Fixing Clip - KPL	26	26			6,5	31,8	27,4	31,9	62,1	21,0	5,0	9805437	250
obujmica / Fixing Clip - KPL	4,5	4,5	4,5		8,5	7,4	5,7	18,7	35,2	18,0	5,0	9805445	
obujmica / Fixing Clip - KPL	7,5	6	7,5		8,5	10,2	7,5	20,1	38,0	18,0	5,0	9805446	500
obujmica / Fixing Clip - KPL	8,5				8,5	12,0	9,4	21,0	39,8	18,0	5,0	9805477	
obujmica / Fixing Clip - KPL	10	8,5	10	8,5	8,5	13,2	11,1	21,6	41,0	18,0	5,0	9805447	500
obujmica / Fixing Clip - KPL	13	11	13	11	8,5	16,1	14,1	23,1	4,9	18,0	5,0	9805448	500
obujmica / Fixing Clip - KPL	17	15	17	15	8,5	21,4	17,9	25,7	49,2	18,0	5,0	9805449	500
obujmica / Fixing Clip - KPL	22	19	22	19	8,5	25,9	22,7	29,0	56,2	21,0	5,0	9805450	250
obujmica / Fixing Clip - KPL	26	26			8,5	31,8	27,4	31,9	62,1	21,0	5,0	9805451	250

Obujmice

Clamps

RoHS

Materijal:
poliacetal POM

Radna temperatura:
-40°C do 110°C

Boje/izvedbe:
• crna

Svojstva:
• gorivost prema UL 94 HB


Material:
Polyacetalresin POM

Temperature range:
-40°C to 110°C


Colour(s)/Designs:
• Black

Characteristics:
• Burning behaviour acc. to UL 94 HB


obujmica
Fixing clamp

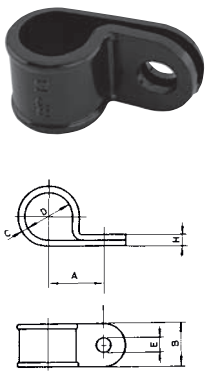


obujmica
Clamping clip

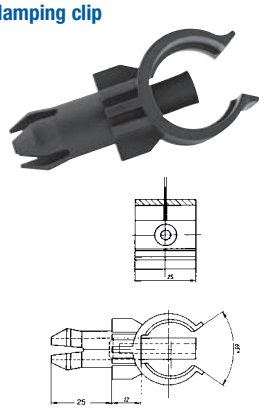

obujmica višestruka
Multiple cable clamp

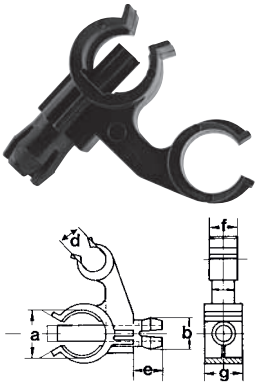

obujmica sa razmakom
Distance clamp

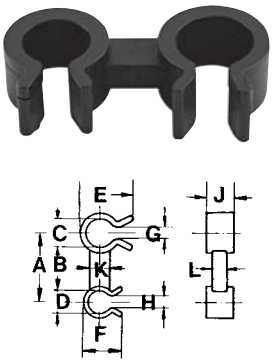

tip Type	za debljinu lima mm for metal sheet thickness mm	odgovara za profil rebraste cijevi NW suitable for corrugated tube profile NW stan-dardni + UFW normal + UFW	AHW	samo-zatvarajući L-Profil self closing L-Profile	zabravlju-jući V-Profil lockable V-Profile	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	j mm	k mm	l mm	broj artikla Art. no.	JP kom. PU pcs.
Obujmica / Fixing clamp																		
RP 6						14,0	16,0	2,0	5,7-6,3	6,6			4,0				8211060	1
RP 8						15,0	16,0	2,0	7,6-8,3	6,6			4,0				8211086	1
RP 9		7,5	6	7,5		15,0	16,0	2,0	8,6-9,3	6,6			4,0				8211094	1
RP 10						16,0	16,0	2,0	9,5-10,3	6,6			4,0				8211108	1
RP 11						16,0	16,0	2,0	10,5-11,3	6,6			4,0				8211116	1
RP 12		8,5		8,5		17,0	16,0	2,0	11,5-12,3	6,6			4,0				8211124	1
RP 13		10	8,5	10	8,5	17,0	16,0	2,0	12,3-13,3	6,6			4,0				8211000	1
RP 14						18,0	16,0	2,5	13,5-14,3	6,6			5,0				8211140	1
RP 15						19,0	16,0	2,5	14,5-15,3	6,6			5,0				8211159	1
RP 16		13	11	13	11	19,0	16,0	2,5	15,5-16,3	6,6			5,0				8211035	1
RP 18						20,0	16,0	2,5	17,4-18,3	6,6			5,0				8211043	1
RP 19						21,0	16,0	2,5	18,4-19,3	6,6			5,0				8211191	1
RP 20		17	15	17	15	22,0	19,0	2,5	19,4-20,3	6,6			5,0				8211205	1
RP 22						23,0	19,0	2,5	21,4-22,3	6,6			5,0				8211019	1
RP 25		22	19	22	19	30,0	23,0	3,0	24,4-25,3	8,6			6,0				8211027	1
Obujmica / Clamping clip																		
	5,5	22	19	22	19												8213055	200
	12,5	22	19	22	19												8213127	200
Obujmica višestruka / Multiple Clamp																		
		8,5 + 17				20,0	12,4		10,5	12,0	12,0	16,0					9805966	200
		13 + 14				14,0	12,4		13,0	12,0	12,0	16,0					9805915	200
Obujmica sa razmakom / Distance Clamp																		
11/8						25,0	16,0	11,0	8,0	19,5	13,5	4,0	3,8	10,0	7,0	5,0	9805982	1000
11/10						25,0	16,0	11,0	10,0	19,5	17,0	5,0	5,0	10,0	7,0	5,0	9805974	1000
11,5/10						25,0	16,0	11,5	10,0	21,5	20,0	4,0	3,2	10,0	7,0	5,0	9805990	500

2.5

Sustavi spajanja / Connection Systems

Kabelske uvodnice	**Cable glands**	3.1
EMV-kabelske uvodnice	**EMC-Cable glands**	3.2
Pribor	**Accessories**	3.3
ATEX **Kabelske uvodnice** **Pribor**	**ATEX** **Cable glands** **Accessories**	3.4

Kabelske uvodnice

Cable glands

	stranica
Pregled	
Opis kabelskih uvodnica s metričkim navojem EN 50 262	4
Zatezni moment za kabelske uvodnice	5
Kutne dimenzije za kabelske uvodnice i pribor	5
Izdržljivost na vlačna i okretna opterećenja	5
Vrijednosti za test udara	5
Uvodnica kabelska SCHLEMMER-TEC	
plastika PA	6 - 9
pribor od plastike	10
mesing niklani	11 - 15
nehrđajući čelik	16
Uvodnica kabelska WADI-TEC	
pregled	17
plastika PA	18 - 26
PVDF	27
mesing niklani	28 - 35
nehrđajući čelik	36
Uvodnica kabelska XXL	37
Uvodnica kabelska MAXXL NOVO	37
Uvodnica kabelska WADI-A	38 - 40
Uvodnica kabelska tip ZEV	41
Uvodnica kabelska tip ZEVB	42
Uvodnica kabelska tip ZA	43
Uvodnica kabelska tip SR	44 - 45
Uvodnica kabelska tip Syntec/KS	46
Uvodnica kabelska konusna	47 - 48
Kabelske uvodnice	49 - 50
Alat za montažu Mon.Za	51

	page
Overviews	
Definition of cable glands with metric thread EN 50 262	4
Tightening torque for cable glands	5
Corner dimensions for cable glands and Accessories	5
Tensile load for retaining power and strain relief, torque for turning tests	5
Value for impact test	5
Cable gland SCHLEMMER-TEC	
Plastic PA	6 - 9
Accessories Plastic	10
Nickel-plated brass	11 - 15
Stainless steel	16
Cable gland WADI-TEC	
Overview	17
Plastic PA	18 - 26
PVDF	27
Nickel-plated brass	28 - 35
Stainless steel	36
Cable gland XXL	37
Cable gland MAXXL NEW	37
Cable gland WADI-A	38 - 40
Cable gland Type ZEV	41
Cable gland Type ZEVB	42
Cable gland Type ZA	43
Cable gland Type SR	44 - 45
Cable gland Type Syntec/KS	46
Conus cable gland	47 - 48
Cable glands	49 - 50
Mounting tool Mon.Za	51

Kabelske uvodnice s metričkim navojem prema EN 50262

Desetgodišnji prijelazni period za postojeće standarde PG navoja, DIN 46320 (dio 1 do 4) i DIN 40430, istekao je 1999. godine.

CENELEC - Europski odbor za elektrotehničke standarde, pripremio je novi standard za metričke kabelske uvodnice.

Kada ovaj europski standard EN 50256 - **"Metričke kabelske uvodnice za električne instalacije"** bude na snazi, bit će uveden ISO "fini" metrički navoj za kabelske uvodnice.

Najvažnije modifikacije za kabelske uvodnice:
ISO fini metrički navoj prema **EN 60423 - Tabela 1** standardiziran je umjesto do sada korištenog PG navoja.

Cable glands with metric thread acc. to EN 50262

The ten year transition period for the existing standards for PG threads, DIN 46320 part 1 to 4 and DIN 40430, ran out in 1999.

The **CENELEC** European committee for electrotechnical standards has prepared a new standard for metric cable glands.

When this European standard EN 50262 **„Metric cable glands for electrical installations“** will be in force, the metric thread ISO „fine“ will be introduced for cable glands.

Most important modification to cable glands:
Metric fine threads to **EN 60423 Table 1** have been standardized in place of the PG connecting thread formerly used.

Nominalna veličina / **Nominal size**	12	16	20	25	32	40	50	63	75
Veličina navoja / **Thread size**	M 12	M 16	M 20	M 25	M 32	M 40	M 50	M 63	M 75
Korak / **Pitch**	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
Vanjski promjer u mm / **External dia. in mm**	12	16	20	25	32	40	50	63	75
prostor za otvor prema Schlemmer specifikaciji / **Schlemmer Specification Clearance hole**	12,2	16,2	20,2	25,2	32,2	40,2	50,2	63,2	75,2

Napomena:
Prilikom planiranja novih konstrukcija uređaja, kućišta, strojeva ili opreme za metričke kabelske uvodnice propisano je korištenje EN 50262.

Schlemmer vam predstavlja . . .
kompletnu paletu kabelskih uvodnica, koje su tehnički oblikovane prema normi **EN 50262**. Za postojeće uređaje navoji PG 7 do PG 48 još uvijek su raspoloživi.

Note:
When planing new constructions of devices, casing, machinery or equipment the EN 50262 for metric cable glands is prescribed.

Schlemmer presents you . . .
a complete range of cable glands, which has been technical designed to the **EN 50262.** For the existing devices the threads PG 7 - PG 48 are still available.

O standardu EN 50262...

Standard EN 50262 je zamijenio postojeće dobro poznate standarde za kabelske uvodnice s PG navojem, DIN 46320 1. do 4. dio i DIN 40430.

Stupanjem standarda „Metričke kabelske uvodnice za električne instalacije“ na snagu, metrički navoj ISO je uveden za kabelske uvodnice.

Najvažnija modifikacija kabelskih uvodnica je da metrički navoji prema EN 50262 postaju standardni kao zamjena za prijašnje PG navoje.

What does standard EN 50262 mean?

The standard EN 50262 was issued on 01.04.1998 and published in April 1999 in Germany as DIN EN 50262/VDE 0619.
The well-known standards for cable glands, such as DIN VDE 0619 (VDE 0619):1987-09, DIN 46 319:1989-12, DIN 46 320-1:1985-09 and DIN 46 320-2...-4:1973-01 were etc., are only applicable until 31.12.1999. Approved technical drawings using these standards were valid until 01.03.2001.

1.) Fields of application for standard EN 50262:

This European standard contains the requirements and tests for the construction and design of metric cable glands. This standard covers the cable gland as a complete part, but not the parts of cable glands.

2.) The screw-in thread of cable glands must be constructed according to chart 1 of EN 60423. The dimensions of the thread are M6x0,75; M8x1; M10x1; M12x1.5; M16x1.5; M20x1.5; M25x1.5; M32x1.5; M40x1.5; M50x1.5; M63x1.5 and M75x1.5.

3.) The mounting holes must be dimensioned according to Chart 1.

4.) Cable glands must be able to guarantee the retaining power for cables and conduits for the complete sealing section. Cable glands with strain relief for cables and conduits must free the conduits from the load of tension and twist. The tests are carried out, with in each case the smallest and largest mentioned value of the sealing resp. strain relief section of the according loads and torque values in Chart 2.

These tests are performed with test pins reproducing the outer diameters of the cables and conduits. The test pins consist of a metal rod with an elastomere sheath.

5.) Cable glands must be impact resistant.

A test pin according to the smallest value of the sealing section is fastened to the test probe and then the test is carried out a lowest temperature according to the energy in accordance with category of Chart 3.

All specifications, charts and values are excerpts from standard DIN 50262. Obviously further tests (electric properties, IP-Code etc.), which are necessary to classify and mark cable glands are described in this standard. It would although go beyond the scope of this catalogue.

Please feel free to ask for further information!

Zatezni moment za kabelske uvodnice

Tightening torque for cable glands

glava u Nm
Dome nut Nm

nominalna veličina PG **Nominal size PG**	**7**	**9**	**11**	**13**	**16**	**21**	**29**	**36**	**42**	**48**
mesing niklani nickel-plated brass	3	5	7	8	11	18	31	53	53	53
plastika Plastic	1,5	2,5	3,5	4	5,5	9	16	27	27	27
SCHLEMMER-TEC PA 6	1	1,5	2,6	2,6	2,6	4	4,5	14	14	14


nominalna veličina metrički **Nominal size Metric**	**12**	**16**	**20**	**25**	**32**	**40**	**50**	**63**	**75**
mesing niklani nickel-plated brass	3	5	8	12	20	34	53	53	53
plastika Plastic	1,5	2,5	4	6	10	17	27	27	
SCHLEMMER-TEC PA 6	1	1,5	2,6	4	4,5	14	14	14	

uvodnica u Nm
Connecting thread Nm

nominalna veličina PG **Nominal size PG**	**7**	**9**	**11**	**13**	**16**	**21**	**29**	**36**	**42**	**48**
mesing niklani nickel-plated brass	4	6	9	10	13	22	40	60	60	60
plastika Plastic	2	3	4,5	5	6,5	11	20	33	33	33

nominalna veličina metrički **Nominal size Metric**	**12**	**16**	**20**	**25**	**32**	**40**	**50**	**63**	**75**
mesing niklani nickel-plated brass	4	6	10	14	24	40	60	60	60
plastika Plastic	2	3	5	7	12	20	33	33	33

Kutne dimenzije za kabelske uvodnice i pribor



Promjer E označava prostor potreban za montažu dotičnog šesterokuta. Ovaj promjer odgovara razmaku između kuteva šesterokuta.
Kutna dimenzija šesterokuta: E = 1,155 x SW
(razmak između stranica šesterokuta).

Corner dimensions for cable glands and Accessories

The diameter E indicates the assembly space required for the relevant hexagon. This diameter corresponds to the width across corner of the hexagon.
Corner of the hexagon: E = 1,155 x SW (across flats).

Izdržljivost na vlačna i okretna opterećenja

Tensile load for retaining power and strain relief, torque for turning tests

promjer kabela i vodiča **Cable and Conduit diameter** **(mm)**	**sila zadržavanja** **Retaining Power** **(N)**	**sila izvlačenja, izdržljivost na vlak A** **Strain relief Type A** **(N)**	**sila izvlačenja, izdržljivost na vlak B** **Strain relief Type B** **(N)**	**Izdržljivost na okret tip A i B** **Torque Type A and B** **(Nm)**
do 4	5	-	-	-
> 4 do 8	10	30	75	0,10
> 8 do 11	15	42	120	0,15
> 11 do 16	20	55	130	0,35
> 16 do 23	25	70	140	0,60
> 23 do 31	30	80	250	0,80
> 31 do 43	45	90	350	0,90
> 43 do 55	55	100	400	1,00
> 55	70	115	450	1,20

Vrijednosti za test udara

Value for impact test

kategorija	**Categorie**	1	2	3	4	5	6	7	8
opterećenje [N]	**Load [N]**	2	2	2	2	10	10	10	20
težina [kg]	**Weight [kg]**	0,2	0,2	0,2	0,2	1,0	1,0	1,0	2,0
energija [J]	**Energy [J]**	0,2	0,5	1,0	2,0	4,0	7,0	10,0	20,0
visina [m]	**Height [m]**	0,1	0,25	0,5	1,0	0,4	0,7	1,0	1,0

Uvodnica kabelska SCHLEMMER-TEC

Poliamid


PG-navoj, kratki

Cable gland SCHLEMMER-TEC

Polyamide

PG-thread, short

RoHS · IP 68 5 bar





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6
- 2: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: PG
- kratki navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- čvrsto brtvljenje osigurano pomoću brtvenog prstena
- trapezoidni navoj sa visokim okretnim momentom garantira čvrsti spoj glave i tijela uvodnice
- otpornost na vibracije
- nepropusnost za vodu i plinove

Pribor (vidi poglavlje…):
- Brtve sa više otvora (3.1)
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- brodogradnja

Material:
- 1/3: Gland element/Cap nut: Polyamide 6
- 2: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: PG
- short thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- seal-tight to enclosure rack through sealing ring
- trapezoidal thread with high torque guarantees tight and permanent fit of the cap nut
- vibration-proof
- gas and water-tight

Accessories (see chapter…):
- Multi-holed Sealings (3.1)
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Ship yards

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG 7	2,5 - 6,5	8,0	15,0	5308707	5308070	5308507	50
PG 9	2,5 - 8,0	8,0	19,0	5308709	5308097	5308509	50
PG 11	3,5 - 10,0	8,0	22,0	5308711	5308119	5308511	50
PG 13,5	5,0 - 12,0	9,0	24,0	5308713	5308135	5308513	50
PG 16	7,0 - 14,0	10,0	27,0	5308716	5308160	5308516	50
PG 21	9,0 - 18,0	11,0	33,0	5308721	5308216	5308521	25
PG 29	14,0 - 25,0	11,0	42,0	5308729	5308291	5308529	20
PG 36	18,0 - 32,0	13,0	53,0	5308736	5308364	5308536	10
PG 42	24,0 - 38,5	13,0	60,0	5308737	5308365	5308537	5
PG 48	35,0 - 48,0	14,0	70,0	5308738	5308366	5308538	5
sa redukcijskom brtvom / with reduction sealing insert							
PG 7 RED	1,5 - 5,0	8,0	15,0	5309107	5309007	5309207	50
PG 9 RED	1,5 - 6,0	8,0	19,0	5309109	5309009	5309209	50
PG 11 RED	2,0 - 7,0	8,0	22,0	5309111	5309011	5309211	50
PG 13,5 RED	3,0 - 9,0	9,0	24,0	5309113	5309013	5309213	50
PG 16 RED	5,0 - 12,0	10,0	27,0	5309116	5309016	5309216	50
PG 21 RED	7,0 - 16,0	11,0	33,0	5309121	5309021	5309221	25
PG 29 RED	11,0 - 21,0	11,0	42,0	5309129	5309029	5309229	20
PG 36 RED	13,0 - 26,0	13,0	53,0	5309136	5309036	5309236	10
PG 42 RED	17,0 - 31,0	13,0	60,0	5309142	5309042	5309242	5
PG 48 RED	26,0 - 39,0	14,0	70,0	5309148	5309048	5309248	5


Uvodnica kabelska SCHLEMMER-TEC


Poliamid
metrički navoj, kratki

Cable gland SCHLEMMER-TEC

Polyamide
metric thread, short

RoHS · UL · CSA · IP 68 5 bar · VDE · DNV · GL · EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6
- 2: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: metrički
- kratki navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- čvrsto brtvljenje osigurano pomoću brtvenog prstena
- trapezoidni navoj sa visokim okretnim momentom garantira čvrsti spoj glave i tijela uvodnice
- otpornost na vibracije
- nepropusnost za vodu i plinove

Pribor (vidi poglavlje…):
- Brtve sa više otvora (3.1)
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- brodogradnja

Material:
- 1/3: Gland element/Cap nut: Polyamide 6
- 2: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: metric
- short thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- seal-tight to enclosure rack through sealing ring
- trapezoidal thread with high torque guarantees tight and permanent fit of the cap nut
- vibration-proof
- gas and water-tight

Accessories (see chapter…):
- Multi-holed Sealings (3.1)
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Ship yards

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
M 12 x 1,5	2,5 - 6,5	8,0	15,0	5308950	5308930	5308940	50
M 16 x 1,5/9	2,5 - 8,0	10,0	19,0	5308958	5308938	5308948	50
M 16 x 1,5/11	3,5 - 10,0	10,0	22,0	5308951	5308931	5308941	50
M 20 x 1,5/13	5,0 - 12,0	10,0	24,0	5308959	5308939	5308949	50
M 20 x 1,5/16	7,0 - 14,0	10,0	27,0	5308952	5308932	5308942	50
M 25 x 1,5/16	7,0 - 14,0	10,0	27,0	5308960	5308961	5308962	50
M 25 x 1,5/21	9,0 - 18,0	10,0	33,0	5308953	5308933	5308943	25
M 32 x 1,5	14,0 - 25,0	10,0	42,0	5308954	5308934	5308944	20
M 40 x 1,5	18,0 - 32,0	10,0	53,0	5308955	5308935	5308945	10
M 50 x 1,5	24,0 - 38,5	12,0	60,0	5308956	5308936	5308946	5
M 63 x 1,5	35,0 - 48,0	12,0	70,0	5308957	5308937	5308947	5
sa redukcijskom brtvom / with reduction sealing insert							
M 12 x 1,5 RED	1,5 - 5,0	8,0	15,0	5309612	5309512	5309712	50
M 16 x 1,5/9 RED	1,5 - 6,0	10,0	19,0	5309615	5309515	5309715	50
M 16 x 1,5/11 RED	2,0 - 7,0	10,0	22,0	5309616	5309516	5309716	50
M 20 x 1,5/13 RED	3,0 - 9,0	10,0	24,0	5309619	5309519	5309719	50
M 20 x 1,5/16 RED	5,0 - 12,0	10,0	27,0	5309620	5309520	5309720	50
M 25 x 1,5/16 RED	5,0 - 12,0	10,0	27,0	5309624	5309524	5309724	50
M 25 x 1,5/21 RED	7,0 - 16,0	10,0	33,0	5309625	5309525	5309725	25
M 32 x 1,5 RED	11,0 - 21,0	10,0	42,0	5309632	5309532	5309732	20
M 40 x 1,5 RED	13,0 - 26,0	10,0	53,0	5309640	5309540	5309740	10
M 50 x 1,5 RED	17,0 - 31,0	12,0	60,0	5309650	5309550	5309750	5
M 63 x 1,5 RED	26,0 - 39,0	12,0	70,0	5309663	5309563	5309763	5


Uvodnica kabelska SCHLEMMER-TEC

Poliamid
metrički navoj, dugi

Cable gland SCHLEMMER-TEC

Polyamide
metric thread, long

RoHS · IP 68 5 bar · EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6
- 2: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: metrički
- dugi navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- čvrsto brtvljenje osigurano pomoću brtvenog prstena
- trapezoidni navoj sa visokim okretnim momentom garantira čvrsti spoj glave i tijela uvodnice
- otpornost na vibracije
- nepropusnost za vodu i plinove

Pribor (vidi poglavlje…):
- Brtve sa više otvora (3.1)
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- brodogradnja

Material:
- 1/3: Gland element/Cap nut: Polyamide 6
- 2: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: metric
- long thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- seal-tight to enclosure rack through sealing ring
- trapezoidal thread with high torque guarantees tight and permanent fit of the cap nut
- vibration-proof
- gas and water-tight

Accessories (see chapter…):
- Multi-holed Sealings (3.1)
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Ship yards


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no silvergrey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
M 12 x 1,5	2,5 - 6,5	15,0	15,0	5307212	5307012	5307112	50
M 16 x 1,5/9	2,5 - 8,0	15,0	19,0	5307217	5307017	5307117	50
M 16 x 1,5/11	3,5 - 10,0	15,0	22,0	5307216	5307016	5307116	50
M 20 x 1,5/13	5,0 - 12,0	15,0	24,0	5307221	5307021	5307121	50
M 20 x 1,5/16	7,0 - 14,0	15,0	27,0	5307220	5307020	5307120	50
M 25 x 1,5/16	7,0 - 14,0	15,0	27,0	5307226	5307026	5307126	50
M 25 x 1,5/21	9,0 - 18,0	15,0	33,0	5307225	5307025	5307125	25
M 32 x 1,5	14,0 - 25,0	15,0	42,0	5307232	5307032	5307132	20
M 40 x 1,5	18,0 - 32,0	16,0	53,0	5307240	5307040	5307140	10
M 50 x 1,5	24,0 - 38,5	16,0	60,0	5307250	5307050	5307150	5
M 63 x 1,5	35,0 - 48,0	16,0	70,0	5307263	5307063	5307163	5
sa redukcijskom brtvom / with reduction sealing insert							
M 12 x 1,5 RED	1,5 - 5,0	15,0	15,0	5307712	5307512	5307612	50
M 16 x 1,5/9 RED	1,5 - 6,0	15,0	19,0	5307717	5307517	5307617	50
M 16 x 1,5/11 RED	2,0 - 7,0	15,0	22,0	5307716	5307516	5307616	50
M 20 x 1,5/13 RED	3,0 - 9,0	15,0	24,0	5307721	5307521	5307621	50
M 20 x 1,5/16 RED	5,0 - 12,0	15,0	27,0	5307720	5307520	5307620	50
M 25 x 1,5/16 RED	5,0 - 12,0	15,0	27,0	5307726	5307526	5307626	50
M 25 x 1,5/21 RED	7,0 - 16,0	15,0	33,0	5307725	5307525	5307625	25
M 32 x 1,5 RED	11,0 - 21,0	15,0	42,0	5307732	5307532	5307632	20
M 40 x 1,5 RED	13,0 - 26,0	16,0	53,0	5307740	5307540	5307640	10
M 50 x 1,5 RED	17,0 - 31,0	16,0	60,0	5307750	5307550	5307650	5
M 63 x 1,5 RED	26,0 - 39,0	16,0	70,0	5307763	5307563	5307663	5


Uvodnica kabelska SCHLEMMER-TEC

Poliamid
NPT-navoj

Cable gland SCHLEMMER-TEC

Polyamide
NPT-thread





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6
- 2: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: NPT
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- čvrsto brtvljenje osigurano pomoću brtvenog prstena
- trapezoidni navoj sa visokim okretnim momentom garantira čvrsti spoj glave i tijela uvodnice
- otpornost na vibracije
- nepropusnost za vodu i plinove

Pribor (vidi poglavlje…):
- Brtve sa više otvora (3.1)
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- brodogradnja
- Offshore uređaji

Material:
- 1/3: Gland element/Cap nut: Polyamide 6
- 2: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: NPT
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- seal-tight to enclosure rack through sealing ring
- trapezoidal thread with high torque guarantees tight and permanent fit of the cap nut
- vibration-proof
- gas and water-tight

Accessories (see chapter…):
- Multi-holed sealing (3.1)
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Ship yards
- Off-shore apparatus

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
NPT 3/8"	2,5 - 8,0	11,0	19,0	5308900	5308910	5308920	50
NPT 1/2"	5,0 - 12,0	14,0	24,0	5308901	5308911	5308921	50
NPT 3/4"	9,0 - 18,0	15,0	33,0	5308902	5308912	5308922	20
NPT 1"	14,0 - 25,0	18,0	42,0	5308903	5308913	5308923	20
sa redukcijskom brtvom / with reduction sealing insert							
NPT 3/8" RED	1,5 - 6,0	11,0	19,0	5308904	5308914	5308924	50
NPT 1/2" RED	3,0 - 9,0	14,0	24,0	5308905	5308915	5308925	50
NPT 3/4" RED	7,0 - 16,0	15,0	33,0	5308906	5308916	5308926	20
NPT 1" RED	11,0 - 21,0	18,0	42,0	5308907	5308917	5308927	20

3.1

Pribor SCHLEMMER-TEC
Poliamid

Brtva s ravnom glavom

RoHS | IP 68

Materijal:
EPDM


Boje/izvedbe:
• crna

Radna temperatura:
-40°C do 130°C

Upotreba:
• **odgovara samo za sve Poliamid SCHLEMMER-TEC kabelske uvodnice**
• kao čep za zatvaranje/brtvljenje otvorenih kabelskih uvodnica

Accessories SCHLEMMER-TEC
Polyamide

Flat head sealing





Material:
EPDM

Colour(s)/Designs:
• black

Temperature range:
-40°C to 130°C

Applications:
• **only fits for all Polyamide SCHLEMMER-TEC cable glands**
• as a plug sealing clamp for closing/ sealing open cable glands

odgovara za suitable for	Ø A mm Ø A mm	Ø B mm Ø B mm	C mm C mm	L mm L mm	broj artikla Art. no.	JP kom. PU pcs.
PG 9; PG 11; M 16	11,0	8,0	17,0	20,0	7217701	1000
PG 13,5; PG 16; M 20	15,0	12,0	18,0	21,0	7217702	1000
PG 21; M 25	18,0	15,0	19,0	22,0	7217703	1000

Brtva i čep otvora brtve

RoHS

Materijal:
neopren


Radna temperatura:
-25°C do 100°C

Boje/izvedbe:
• crna

Svojstva:
• isporučuje se posebno
• ∗) s otvorima od jednog drugog kraja brtve

Upotreba:
• **odgovara samo za sve Poliamid SCHLEMMER-TEC kabelske uvodnice**

Sealing and Blind pin





Material:
Neoprene

Temperature range:
-25°C to 100°C

Colour(s)/Designs:
• black

Characteristics:
• delivered only seperately
• ∗) with end-to-end pierced holes

Applications:
• **only fits for all Polyamide SCHLEMMER-TEC cable glands**


odgovara za suitable for	broj otvora cable-passages	promjer otvora mm Hole diameter mm	A mm A mm	B mm B mm	broj artikla čep otvora brtve Art. no. Blind pin	broj artikla brtva Art. no. Sealing	JP kom. PU pcs.
Brtva s otvorima za kabele / Multi-holed Sealing ∗)							
M 16/PG 11	2 x	4,0	13,0	8,0	4650494	8114200	slobodno / loose
M 20/PG 16	2 x	5,0	17,0	10,0	4650495	8114203	slobodno / loose
M 20/PG 16	2 x	6,0	17,0	10,0	4650496	8114201	slobodno / loose
M 20/PG 16	3 x	6,0	17,0	10,0	4650496	8114215	slobodno / loose
M 20/PG 16	4 x	5,0	17,0	10,0	4650495	8114202	slobodno / loose
M 25/PG 21	2 x	6,0	22,5	11,5	4650496	8114204	slobodno / loose
M 25/PG 21	2 x	8,0	22,5	11,5	4650498	8114208	slobodno / loose
M 25/PG 21	3 x	7,0	22,5	11,5	4650497	8114205	slobodno / loose
M 25/PG 21	4 x	6,5	22,5	11,5	-	8114206	slobodno / loose
M 25/PG 21	6 x	4,0	22,5	11,5	4650494	8114207	slobodno / loose
M 32/PG 29	4 x	6,0	30,5	13,0	4650496	8114212	slobodno / loose
M 32/PG 29	4 x	8,0	30,5	13,0	4650498	8114209	slobodno / loose
M 32/PG 29	6 x	6,0	30,5	13,0	4650496	8114210	slobodno / loose
M 32/PG 29	8 x	4,0	30,5	13,0	4650494	8114211	slobodno / loose
Slijepa brtva bez otvora za kabele / Full-Sealing without cable-passages							
M 16/PG 11	-	-	13,0	8,0		8114250	slobodno / loose
M 20/PG 16	-	-	17,0	10,0		8114251	slobodno / loose
M 25/PG 21	-	-	22,5	11,5		8114252	slobodno / loose
M 32/PG 29	-	-	30,5	13,0		8114253	slobodno / loose

Uvodnica kabelska SCHLEMMER-TEC

mesing niklani
PG-navoj, kratki

Cable gland SCHLEMMER-TEC

nickel-plated brass
PG-thread, short





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove
- dodatni brtveni prsten (4) od nitrila na tijelu kabelske uvodnice

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- short thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight
- additional Nitrile sealing-ring (4) on the gland element

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG 7	2,5 - 6,5	5,0	14,0	4220307	50
PG 9	4,0 - 9,5	6,0	17,0	4220309	50
PG 11	6,0 - 11,5	6,0	20,0	4220311	50
PG 13,5	7,0 - 13,0	6,5	22,0	4220313	50
PG 16	8,0 - 15,0	6,5	24,0	4220316	50
PG 21	11,0 - 19,0	7,0	30,0	4220321	20
PG 29	16,0 - 26,0	8,0	40,0	4220329	20
PG 36	22,0 - 34,5	9,0	50,0	4220336	10
PG 42	27,0 - 40,0	10,0	58,0	4220342	5
PG 48	35,0 - 48,0	10,0	65,0	4220348	5
sa redukcijskom brtvom / with reduction sealing insert					
PG 7 RED	1,5 - 5,0	5,0	14,0	4220351	50
PG 9 RED	2,5 - 7,0	6,0	17,0	4220352	50
PG 11 RED	3,0 - 8,5	6,0	20,0	4220353	50
PG 13,5 RED	4,0 - 10,0	6,5	22,0	4220354	50
PG 16 RED	5,0 - 12,0	6,5	24,0	4220355	50
PG 21 RED	8,0 - 16,0	7,0	30,0	4220356	20
PG 29 RED	11,0 - 21,0	8,0	40,0	4220357	20
PG 36 RED	16,0 - 28,0	9,0	50,0	4220358	10
PG 42 RED	22,0 - 34,0	10,0	58,0	4220359	5
PG 48 RED	28,0 - 40,0	10,0	65,0	4220360	5

Uvodnica kabelska SCHLEMMER-TEC

mesing niklani
PG-navoj, dugi

Cable gland SCHLEMMER-TEC

nickel-plated brass
PG-thread, long





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- dugi navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove
- dodatni brtveni prsten (4) od nitrila na tijelu kabelske uvodnice

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- long thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight
- additional Nitrile sealing-ring (4) on the gland element

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG 7	2,5 - 6,5	15,0	14,0	4220407	50
PG 9	4,0 - 9,5	15,0	17,0	4220409	50
PG 11	6,0 - 11,5	15,0	20,0	4220411	50
PG 13,5	7,0 - 13,0	15,0	22,0	4220413	50
PG 16	8,0 - 15,0	15,0	24,0	4220416	50
PG 21	11,0 - 19,0	15,0	30,0	4220421	20
PG 29	16,0 - 26,0	15,0	40,0	4220429	20
PG 36	22,0 - 34,5	15,0	50,0	4220436	10
PG 42	27,0 - 40,0	15,0	58,0	4220442	5
PG 48	35,0 - 48,0	15,0	65,0	4220448	5
sa redukcijskom brtvom / with reduction sealing insert					
PG 7 RED	1,5 - 5,0	15,0	14,0	4220451	50
PG 9 RED	2,5 - 7,0	15,0	17,0	4220452	50
PG 11 RED	3,0 - 8,5	15,0	20,0	4220453	50
PG 13,5 RED	4,0 - 10,0	15,0	22,0	4220454	50
PG 16 RED	5,0 - 12,0	15,0	24,0	4220455	50
PG 21 RED	8,0 - 16,0	15,0	30,0	4220456	20
PG 29 RED	11,0 - 21,0	15,0	40,0	4220457	20
PG 36 RED	16,0 - 28,0	15,0	50,0	4220458	10
PG 42 RED	22,0 - 34,0	15,0	58,0	4220459	5
PG 48 RED	28,0 - 40,0	15,0	65,0	4220460	5

Uvodnica kabelska SCHLEMMER-TEC

mesing niklani
metrički navoj, kratki

Cable gland SCHLEMMER-TEC

nickel-plated brass
metric thread, short





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove
- dodatni brtveni prsten (4) od nitrila na tijelu kabelske uvodnice

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight
- additional Nitrile sealing-ring (4) on the gland element

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	2,5 - 6,5	5,0	14,0	4220612	50
M 16 x 1,5	4,0 - 9,5	5,0	17,0	4220616	50
M 20 x 1,5	7,0 - 13,0	6,0	22,0	4220620	50
M 25 x 1,5	8,0 - 16,0	7,0	27,0	4220625	25
M 32 x 1,5	11,0 - 21,0	8,0	34,0	4220632	20
M 40 x 1,5	15,0 - 27,0	8,0	42,0	4220640	10
M 50 x 1,5	22,0 - 35,0	9,0	55,0	4220650	5
M 63 x 1,5	35,0 - 48,0	10,0	65,0	4220663	5
sa redukcijskom brtvom / with reduction sealing insert					
M 12 x 1,5 RED	1,5 - 5,0	5,0	14,0	4220712	50
M 16 x 1,5 RED	2,5 - 7,0	5,0	17,0	4220716	50
M 20 x 1,5 RED	4,0 - 10,0	6,0	22,0	4220720	50
M 25 x 1,5 RED	5,0 - 13,0	7,0	27,0	4220725	25
M 32 x 1,5 RED	7,0 - 17,0	8,0	34,0	4220732	20
M 40 x 1,5 RED	10,0 - 22,0	8,0	42,0	4220740	10
M 50 x 1,5 RED	17,0 - 29,0	9,0	55,0	4220750	5
M 63 x 1,5 RED	28,0 - 40,0	10,0	65,0	4220763	5


Uvodnica kabelska SCHLEMMER-TEC

mesing niklani
metrički navoj, dugi

Cable gland SCHLEMMER-TEC

nickel-plated brass
metric thread, long

RoHS | IP 68 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- dugi navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove
- dodatni brtveni prsten (4) od nitrila na tijelu kabelske uvodnice

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- long thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight
- additional Nitrile sealing-ring (4) on the gland element


Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	2,5 - 6,5	15,0	14,0	4220670	50
M 16 x 1,5	4,0 - 9,5	15,0	17,0	4220671	50
M 20 x 1,5	7,0 - 13,0	15,0	22,0	4220673	50
M 25 x 1,5	8,0 - 16,0	15,0	27,0	4220675	25
M 32 x 1,5	11,0 - 21,0	15,0	34,0	4220677	20
M 40 x 1,5	15,0 - 27,0	15,0	42,0	4220678	10
M 50 x 1,5	22,0 - 35,0	15,0	55,0	4220679	5
M 63 x 1,5	35,0 - 48,0	15,0	65,0	4220680	5
sa redukcijskom brtvom / with reduction sealing insert					
M 12 x 1,5 RED	1,5 - 5,0	15,0	14,0	4220770	50
M 16 x 1,5 RED	2,5 - 7,0	15,0	17,0	4220771	50
M 20 x 1,5 RED	4,0 - 10,0	15,0	22,0	4220773	50
M 25 x 1,5 RED	5,0 - 13,0	15,0	27,0	4220775	25
M 32 x 1,5 RED	7,0 - 17,0	15,0	34,0	4220777	20
M 40 x 1,5 RED	10,0 - 22,0	15,0	42,0	4220778	10
M 50 x 1,5 RED	17,0 - 29,0	15,0	55,0	4220779	5
M 63 x 1,5 RED	28,0 - 40,0	15,0	65,0	4220780	5

Uvodnica kabelska SCHLEMMER-TEC
mesing niklani
NPT-navoj

Cable gland SCHLEMMER-TEC
nickel-plated brass
NPT-thread





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: NPT
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: NPT
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 1 mm SW 1 mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
NPT 3/8”	4,0 - 9,5	15,0	17,0	18,0	4220800	50
NPT 1/2”	7,0 - 13,0	20,0	22,0	23,0	4220801	50
NPT 3/4”	8,0 - 16,0	20,0	27,0	28,0	4220802	20
NPT 1”	11,0 - 21,0	25,0	34,0	36,0	4220803	20
sa redukcijskom brtvom / with reduction sealing insert						
NPT 3/8” RED	2,5 - 7,0	15,0	17,0	18,0	4220810	50
NPT 1/2” RED	4,0 - 10,0	20,0	22,0	23,0	4220811	50
NPT 3/4” RED	5,0 - 13,0	20,0	27,0	28,0	4220812	20
NPT 1” RED	7,0 - 17,0	25,0	34,0	36,0	4220813	20


Uvodnica kabelska SCHLEMMER-TEC

nehrđajući čelik 1.4404, INOX 316L, metrički navoj, kratki

Cable gland SCHLEMMER-TEC

stainless steel 1.4404, INOX 316L, metric thread, short

RoHS | IP 68 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: nehrđajući čelik 1.4404, INOX 316L
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- raspoloživa sa redukcijskom brtvom

Svojstva:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove
- dodatni brtveni prsten (4) od nitrila na tijelu kabelske uvodnice

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- tehnologija automatizacije
- prehrambena industrija
- Offshore uređaji
- vjetroelektrane

Material:
- 1/3: Gland element/Cap nut: stainless steel 1.4404, INOX 316L
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperture range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight
- additional Nitrile sealing-ring (4) on the gland element

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Automation technology
- Food Industries
- Off-Shore apparatus
- Wind power station

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla nehrđajući čelik Art. no. stainless steel	JP kom. PU pcs.
M 12 x 1,5	4,5- 6,5	5,0	14,0	4220850	50
M 16 x 1,5	5,0 - 9,5	5,0	17,0	4220851	50
M 20 x 1,5	8,0 - 13,0	6,0	22,0	4220852	50
M 25 x 1,5	9,0 - 16,0	7,0	27,0	4220853	25
M 32 x 1,5	12,0 - 21,0	8,0	34,0	4220854	20
M 40 x 1,5	16,0 - 27,0	8,0	42,0	4220855	10
M 50 x 1,5	23,0 - 35,0	9,0	55,0	4220856	5
M 63 x 1,5	36,0 - 48,0	10,0	65,0	4220857	5
sa redukcijskom brtvom / with reduction sealing insert					
M 12 x 1,5 RED	1,5 - 5,0	5,0	14,0	4220860	100
M 16 x 1,5 RED	2,5 - 7,0	5,0	17,0	4220861	50
M 20 x 1,5 RED	4,0 - 10,0	6,0	22,0	4220862	50
M 25 x 1,5 RED	5,0 - 13,0	7,0	27,0	4220863	25
M 32 x 1,5 RED	7,0 - 17,0	8,0	34,0	4220864	20
M 40 x 1,5 RED	10,0 - 22,0	8,0	42,0	4220865	10
M 50 x 1,5 RED	17,0 - 29,0	9,0	55,0	4220866	5
M 63 x 1,5 RED	28,0 - 40,0	10,0	65,0	4220867	5

Pregled
WADI-TEC kabelske uvodnice

Overview
WADI-TEC cable glands

RoHS | IP 68

	duga brtva, 2-djelna long sealing, two parts	brtve sa više otvora multi-conductor sealing	ravna brtva flat sealing	kratka brtva short sealing	kratka brtva / stezni prsten short sealing/clamping ring **ECA verzija** zaštita od izvlačenja pomoću steznog prstena **ECA Version** Strain relief through clamping ring
poliamid Polyamide					
mesing niklani nickel-plated brass					
PVDF PVDF					
nehrđajući čelik Stainless steel 1.4404, 316L					


Uvodnica kabelska WADI-TEC

Poliamid
ECA-stezni prsten
PG-/metrički navoj

Cable gland WADI-TEC

Polyamide
ECA-Clamping-Ring
PG-/metric thread

RoHS | IP 68 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6, ojačano s 25% staklenih vlakana
- 2: ECA-stezni prsten: polikarbonat
- 4: brtva: tefabloc

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, crna
- vanjski navoj: PG/metrički
- kratki/dugi navoj
- ECA-stezni prsten

Svojstva:
- zaštita od izvlačenja pomoću steznog prstena
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide 6, 25 % glassfiber reinforced
- 2: ECA-Clamping-Ring: Polycarbonate
- 4: Sealing: Tefabloc

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, jet black
- External thread: PG/metric
- short/long thread
- ECA-Clamping-Ring

Characteristics:
- strain relief through clamping ring
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Measuring and control engineering


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG, kratki navoj / PG, short thread							
PG 7	3,0 - 6,0	8,0	15,0	31,0	5313610	5313620	50
PG 9	5,0 - 8,0	8,0	19,0	32,0	5313611	5313621	50
PG 11	6,0 - 10,0	8,0	22,0	35,0	5313612	5313622	50
PG 13,5	8,0 - 12,0	9,0	24,0	36,0	5313613	5313623	50
PG 16	10,0 - 14,0	10,0	27,0	40,0	5313614	5313624	50
PG 21	11,5 - 18,0	11,0	33,0	44,0	5313615	5313625	20
PG 29	15,0 - 24,0	12,0	42,0	55,0	5313616	5313626	20
PG, dugi navoj / PG, long thread							
PG 7	3,0 - 6,0	15,0	15,0	38,0	5313710	5313720	50
PG 9	5,0 - 8,0	15,0	19,0	39,0	5313711	5313721	50
PG 11	6,0 - 10,0	15,0	22,0	42,0	5313712	5313722	50
PG 13,5	8,0 - 12,0	15,0	24,0	42,0	5313713	5313723	50
PG 16	10,0 - 14,0	15,0	27,0	45,0	5313714	5313724	50
PG 21	11,5 - 18,0	15,0	33,0	49,0	5313715	5313725	20
PG 29	15,0 - 24,0	15,0	42,0	58,0	5313716	5313726	20
PG 36	24,0 - 34,0	18,0	55,0	65,0	5313717	5313727	10
PG 42	34,0 - 42,0	18,0	65,0	67,0	5313718	5313728	10
PG 48	40,0 - 48,0	18,0	70,0	67,0	5313719	5313729	10
metrički, kratki navoj / metric, short thread							
M 16 x 1,5	5,0 - 8,0	8,0	19,0	32,0	5313640	5313650	50
M 20 x 1,5/13	8,0 - 12,0	9,0	24,0	36,0	5313641	5313651	50
M 20 x 1,5/16	10,0 - 14,0	9,0	27,0	39,0	5313644	5313654	50
M 25 x 1,5	11,5 - 18,0	11,0	33,0	44,0	5313642	5313652	20
M 32 x 1,5	15,0 - 24,0	12,0	42,0	55,0	5313643	5313653	20
metrički, dugi navoj / metric, long thread							
M 16 x 1,5	5,0 - 8,0	15,0	19,0	39,0	5313670	5313680	50
M 20 x 1,5/13	8,0 - 12,0	15,0	24,0	42,0	5313671	5313681	50
M 20 x 1,5/16	10,0 - 14,0	15,0	27,0	45,0	5313677	5313687	50
M 25 x 1,5	11,5 - 18,0	15,0	33,0	48,0	5313672	5313682	20
M 32 x 1,5	15,0 - 24,0	15,0	42,0	58,0	5313673	5313683	20
M 40 x 1,5	24,0 - 34,0	15,0	55,0	63,0	5313674	5313684	10
M 50 x 1,5	34,0 - 42,0	15,0	65,0	65,0	5313675	5313685	10
M 63 x 1,5	40,0 - 48,0	15,0	70,0	65,0	5313676	5313686	5

Uvodnica kabelska WADI-TEC

Poliamid
kratka brtva
PG-/metrički navoj

Cable gland WADI-TEC

Polyamide
short sealing
PG-/metric thread





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6, ojačano s 25% staklenih vlakana
- 2: brtva: tefabloc

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, crna
- vanjski navoj: PG/metrički
- kratki/dugi navoj
- kratka brtva

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide 6, 25 % glassfiber reinforced
- 2: Sealing: Tefabloc

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, jet black
- External thread: PG/metric
- short/long thread
- short sealing

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Measuring and control engineering


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG, kratki navoj / PG, short thread							
PG 7	3,0 - 6,0	8,0	15,0	31,0	5211107	5211307	50
PG 9	4,5 - 8,0	8,0	19,0	32,0	5211109	5211309	50
PG 11	6,5 - 10,5	8,0	22,0	35,0	5211111	5211311	50
PG 13,5	7,0 - 12,0	9,0	24,0	36,0	5211113	5211313	50
PG 16	9,0 - 14,0	10,0	27,0	40,0	5211116	5211316	50
PG 21	11,5 - 18,0	11,0	33,0	44,0	5211121	5211321	20
PG 29	15,0 - 24,5	12,0	42,0	55,0	5211129	5211329	20
PG, dugi navoj / PG, long thread							
PG 7	3,0 - 6,0	15,0	15,0	38,0	5211150	5211350	50
PG 9	4,5 - 8,0	15,0	19,0	39,0	5211151	5211351	50
PG 11	6,5 - 10,5	15,0	22,0	42,0	5211152	5211352	50
PG 13,5	7,0 - 12,0	15,0	24,0	42,0	5211153	5211353	50
PG 16	9,0 - 14,0	15,0	27,0	45,0	5211154	5211354	50
PG 21	11,5 - 18,0	15,0	33,0	49,0	5211155	5211355	20
PG 29	15,0 - 24,5	15,0	42,0	58,0	5211156	5211356	20
PG 36	24,0 - 34,0	18,0	55,0	65,0	5211157	5211357	10
PG 42	34,0 - 42,0	18,0	65,0	67,0	5211158	5211358	10
PG 48	40,0 - 48,0	18,0	70,0	67,0	5211159	5211359	10
metrički, kratki navoj / metric, short thread							
M 16 x 1,5	4,5 - 8,0	8,0	19,0	32,0	5211416	5211616	50
M 20 x 1,5/13	7,0 - 12,0	9,0	24,0	36,0	5211420	5211620	50
M 20 x 1,5/16	9,0 - 14,0	9,0	27,0	39,0	5211421	5211621	50
M 25 x 1,5	11,5 - 18,0	11,0	33,0	44,0	5211425	5211625	20
M 32 x 1,5	15,0 - 24,5	12,0	42,0	55,0	5211432	5211632	20
metrički, dugi navoj / metric, long thread							
M 16 x 1,5	4,5 - 8,0	15,0	19,0	39,0	5211441	5211641	50
M 20 x 1,5/13	7,0 - 12,0	15,0	24,0	42,0	5211442	5211642	50
M 20 x 1,5/16	9,0 - 14,0	15,0	27,0	45,0	5211448	5211648	50
M 25 x 1,5	11,5 - 18,0	15,0	33,0	48,0	5211443	5211643	20
M 32 x 1,5	15,0 - 24,5	15,0	42,0	58,0	5211444	5211644	20
M 40 x 1,5	24,0 - 34,0	15,0	55,0	63,0	5211445	5211645	10
M 50 x 1,5	34,0 - 42,0	15,0	65,0	65,0	5211446	5211646	10
M 63 x 1,5	40,0 - 48,0	15,0	70,0	65,0	5211447	5211647	5

Uvodnica kabelska WADI-TEC

Poliamid
duga brtva, 2-djelna
PG-/metrički navoj

Cable gland WADI-TEC

Polyamide
long sealing, two parts
PG-/metric thread





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6, ojačano s 25% staklenih vlakana
- 2: brtva: santopren
- 4: brtva: nitril

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, crna
- vanjski navoj: PG/metrički
- kratki/dugi navoj
- duga brtva, 2-djelna

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide 6, 25 % glassfiber reinforced
- 2: Sealing: Santoprene
- 4: Sealing: Nitrile

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, jet black
- External thread: PG/metric
- short/long thread
- long sealing, two parts

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Measuring and control engineering


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG, kratki navoj / PG, short thread							
PG 9	3,0 - 8,0	8,0	19,0	32,0	5320001	5320051	50
PG 11	5,0 - 11,0	8,0	22,0	35,0	5320002	5320052	50
PG 13,5	5,0 - 12,5	9,0	24,0	36,0	5320003	5320053	50
PG 16	7,0 - 14,5	10,0	27,0	40,0	5320004	5320054	50
PG 21	10,0 - 18,0	11,0	33,0	44,0	5320005	5320055	20
PG 29	14,0 - 24,0	12,0	42,0	55,0	5320006	5320056	20
PG 36	22,0 - 32,0	18,0	55,0	65,0	5320007	5320057	10
PG 42	30,0 - 40,0	18,0	65,0	67,0	5320008	5320058	10
PG 48	34,0 - 46,0	18,0	70,0	67,0	5320009	5320059	5
PG, dugi navoj / PG, long thread							
PG 9	3,0 - 8,0	15,0	19,0	39,0	5320071	5320091	50
PG 11	5,0 - 11,0	15,0	22,0	42,0	5320072	5320092	50
PG 13,5	5,0 - 12,5	15,0	24,0	42,0	5320073	5320093	50
PG 16	7,0 - 14,5	15,0	27,0	45,0	5320074	5320094	50
PG 21	10,0 - 18,0	15,0	33,0	49,0	5320075	5320095	20
PG 29	14,0 - 24,0	15,0	42,0	58,0	5320076	5320096	20
metrički, kratki navoj / metric, short thread							
M 16 x 1,5	3,0 - 8,0	8,0	19,0	32,0	5320100	5320160	50
M 20 x 1,5/13	5,0 - 12,5	9,0	24,0	36,0	5320101	5320161	50
M 20 x 1,5/16	7,0 - 14,5	9,0	27,0	39,0	5320104	5320164	50
M 25 x 1,5	10,0 - 18,0	11,0	33,0	44,0	5320102	5320162	20
M 32 x 1,5	14,0 - -24,0	12,0	42,0	55,0	5320103	5320163	20
M 40 x 1,5	22,0 - 32,0	15,0	55,0	63,0	5320105	5320165	10
M 50 x 1,5	30,0 - 40,0	15,0	65,0	65,0	5320106	5320166	10
M 63 x 1,5	34,0 - 46,0	15,0	70,0	65,0	5320107	5320167	5
metrički, dugi navoj / metric, long thread							
M 16 x 1,5	3,0 - 8,0	15,0	19,0	39,0	5320120	5320170	50
M 20 x 1,5/13	5,0 - 12,5	15,0	24,0	42,0	5320121	5320171	50
M 20 x 1,5/16	7,0 - 14,5	15,0	27,0	45,0	5320127	5320177	50
M 25 x 1,5	10,0 - 18,0	15,0	33,0	48,0	5320122	5320172	20
M 32 x 1,5	14,0 - 24,0	15,0	42,0	58,0	5320123	5320173	20

Uvodnica kabelska WADI-TEC

Poliamid
sa brtvom za plosnate kabele
PG-navoj, kratki

Cable gland WADI-TEC

Polyamide
flat cable sealing
PG-thread, short





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6, ojačano s 25% staklenih vlakana
- 2: brtva: tefabloc

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: PG
- kratki navoj
- duga brtva za plosnati kabel zaobljeni, pravokutni, ovalni

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide 6, 25 % glassfiber reinforced
- 2: Sealing: Tefabloc

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: PG
- short thread
- long sealing for flat cables, round, angular, oval

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Measuring and control engineering


	plosnati kabel zaobljeni Flat cable, round			plosnati kabel pravokutni Flat cable, angular			plosnati kabel ovalni Flat cable, oval			
vanjski navoj External thread	za kabel promjera mm Clamping range mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	za kabel promjera mm Clamping range mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	za kabel promjera mm Clamping range mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG 9	3,5x 5,5	5320300	5320500							50
PG 11	2,8x10,5	5320305	5320505							50
PG 11	3,5x 9,0	5320306	5320506							50
PG 11	4,0x 6,0	5320307	5320507							50
PG 13,5	3,0x12,0	5320310	5320510				5,0x 8,0	5320375	5320575	50
PG 13,5	5,0x11,0	5320311	5320511				5,0x12,0	5320376	5320576	50
PG 16	5,0x12,0	5320315	5320515	8,0x12,0	5320351	5320551	5,0x12,0	5320380	5320580	50
PG 16	5,0x16,0	5320316	5320516				5,5x 8,5	5320381	5320581	50
PG 16	7,5x14,0	5320317	5320517				5,0x15,0	5320382	5320582	50
PG 16							6,0x15,0	5320383	5320583	50
PG 16							7,0x14,0	5320384	5320584	50
PG 21	5,0x17,0	5320320	5320520	4,0x15,0	5320355	5320555	5,0x16,0	5320385	5320585	20
PG 21	7,0x18,0	5320321	5320521				7,0x16,5	5320386	5320586	20
PG 21	9,0x15,0	5320322	5320522				7,0x20,0	5320387	5320587	20
PG 29	6,0x29,0	5320325	5320525	6,0x26,0	5320360	5320560	10,0x27,0	5320390	5320590	20
PG 29	8,0x25,0	5320326	5320526	7,0x26,0	5320361	5320561				20
PG 29	10,0x25,0	5320327	5320527							20
PG 29	13,0x28,0	5320328	5320528							20
PG 36	6,0x30,0	5320330	5320530	5,0x36,0	5320365	5320565	6,5x32,0	5320393	5320593	20
PG 36	6,0x36,0	5320331	5320531	8,0x30,0	5320366	5320566	11,0x35,0	5320394	5320594	20
PG 36	8,0x36,0	5320332	5320532							20
PG 36	11,0x34,0	5320333	5320533							20
PG 36	12,0x35,0	5320334	5320534							20
PG 42	10,0x38,0	5320335	5320535	5,5x37,0	5320370	5320570	6,0x41,0	5320396	5320596	20
PG 42	13,0x35,0	5320336	5320536	6,0x39,0	5320371	5320571	9,0x38,0	5320397	5320597	20
PG 42	14,0x37,0	5320337	5320537							20
PG 48	6,5x47,0	5320342	5320542							20
PG 48	9,0x43,0	5320343	5320543							20
PG 48	14,5x39,0	5320344	5320544							20
PG 48	15,0x45,0	5320345	5320545							20

Uvodnica kabelska WADI-TEC

Poliamid
sa brtvom za plosnate kabele
metrički navoj

Cable gland WADI-TEC

Polyamide
flat cable sealing
metric thread





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid PA 6, ojačano s 25% staklenih vlakana
- 2: brtva: tefabloc

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: metrički
- kratki/dugi navoj
- duga brtva za plosnati kabel zaobljeni, pravokutni, ovalni

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Tefabloc

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: metric
- short/long thread
- long sealing for flat cables round, angular, oval

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Measuring and control engineering


	plosnati kabel zaobljeni Flat cable, round			plosnati kabel pravokutni Flat cable, angular			plosnati kabel ovalni Flat cable, oval			
vanjski navoj External thread	za kabel promjera mm Clamping range mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	za kabel promjera mm Clamping range mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	za kabel promjera mm Clamping range mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
kratki navoj / short thread										
M 16 x 1,5	3,5x 5,5	5320710	5320810							5
M 20x1,5/13	3,0x12,0	5320715	5320815				5,0x 8,0	5320770	5320870	50
M 20x1,5/13	5,0x11,0	5320716	5320816				5,0x12,0	5320771	5320871	50
M 20x1,5/16	5,0x12,0	5320717	5320817	8,0x12,0	5320785	5320885	5,5x 8,5	5320772	5320872	50
M 20x1,5/16	7,5x14,0	5320718	5320818				7,0x14,0	5320773	5320873	50
M 25 x 1,5	5,0x16,0	5320720	5320820	4,0x15,0	5320786	5320886	5,0x15,0	5320774	5320874	20
M 25 x 1,5	5,0x17,0	5320721	5320821				5,0x16,0	5320775	5320875	20
M 25 x 1,5	7,0x18,0	5320722	5320822				6,0x15,0	5320776	5320876	20
M 25 x 1,5	9,0x15,0	5320723	5320823				7,0x16,5	5320777	5320877	20
M 32 x 1,5	8,0x25,0	5320730	5320830				7,0x20,0	5320780	5320880	20
M 32 x 1,5	10,0x25,0	5320731	5320831							20
dugi navoj / long thread										
M 16 x 1,5	3,5x 5,5	5320732	5320832							50
M 20x1,5/13	3,0x12,0	5320735	5320835				5,0x 8,0	5320700	5320800	50
M 20x1,5/13	5,0x11,0	5320736	5320836				5,0x12,0	5320701	5320801	50
M 20x1,5/16	5,0x12,0	5320737	5320837	8,0x12,0	5320787	5320887	5,5x 8,5	5320702	5320802	50
M 20x1,5/16	7,5x14,0	5320738	5320838				7,0x14,0	5320703	5320803	50
M 25 x 1,5	5,0x16,0	5320740	5320840	4,0x15,0	5320788	5320888	5,0x15,0	5320704	5320804	20
M 25 x 1,5	5,0x17,0	5320741	5320841				5,0x16,0	5320705	5320805	20
M 25 x 1,5	7,0x18,0	5320742	5320842				6,0x15,0	5320706	5320806	20
M 25 x 1,5	9,0x15,0	5320743	5320843				7,0x16,5	5320707	5320807	20
M 32 x 1,5	8,0x25,0	5320745	5320845				7,0x20,0	5320708	5320808	20
M 32 x 1,5	10,0x25,0	5320746	5320846							20
M 40 x 1,5	6,0x29,0	5320747	5320847	5,0x36,0	5320790	5320890	6,5x32,0	5320781	5320881	10
M 40 x 1,5	6,0x30,0	5320748	5320848	6,0x26,0	5320791	5320891	10,0x27,0	5320782	5320882	10
M 40 x 1,5	6,0x36,0	5320749	5320849	7,0x26,0	5320792	5320892	11,0x35,0	5320783	5320883	10
M 40 x 1,5	8,0x36,0	5320750	5320850	8,0x30,0	5320793	5320893				10
M 40 x 1,5	11,0x34,0	5320751	5320851							10
M 40 x 1,5	12,0x35,0	5320752	5320852							10
M 40 x 1,5	13,0x28,0	5320753	5320853							10
M 50 x 1,5	10,0x38,0	5320755	5320855	5,5x37,0	5320794	5320894	6,0x41,0	5320784	5320884	10
M 50 x 1,5	13,0x35,0	5320756	5320856	6,0x39,0	5320795	5320895	9,0x38,0	5320796	5320896	10
M 50 x 1,5	14,0x37,0	5320757	5320857							10
M 63 x 1,5	6,5x47,0	5320758	5320858							10
M 63 x 1,5	9,0x43,0	5320759	5320859							10
M 63 x 1,5	14,5x39,0	5320760	5320860							10
M 63 x 1,5	15,0x45,0	5320761	5320861							10

Uvodnica kabelska WADI-TEC Duplo

Poliamid
brtva sa više otvora
PG-navoj, kratki

Cable gland WADI-TEC Duplo

Polyamide
multi-holed sealing
PG-thread, short





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6, ojačano s 25% staklenih vlakana
- 2: brtva: tefabloc

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: PG
- kratki navoj
- duga brtva sa više otvora
- brtvljenje otvora
- bez potrebe za čepovima otvora brtve

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide 6, 25 % glassfiber reinforced
- 2: Sealing: Tefabloc

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: PG
- short thread
- long multi-holed sealing
- Blind hole sealing
- No blind pin required

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- Measuring and control engineering

vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW (L) mm SW mm	ukupna duljina mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG 7	1 x	4,0	8,0	15,0	31,0	5315800	5315600	50
PG 7	1 x	5,0	8,0	15,0	31,0	5315801	5315601	50
PG 9	1 x	5,0	8,0	19,0	32,0	5315810	5315610	50
PG 9	2 x	1,0	8,0	19,0	32,0	5315811	5315611	50
PG 9	2 x	3,0	8,0	19,0	32,0	5315812	5315612	50
PG 9	2 x	3,5	8,0	19,0	32,0	5315813	5315613	50
PG 9	2 x	4,0	8,0	19,0	32,0	5315814	5315614	50
PG 9	3 x	3,0	8,0	19,0	32,0	5315815	5315615	50
PG 9	4 x	3,0	8,0	22,0	34,0	5315816	5315616	50
PG 9	4 x	4,0	8,0	22,0	34,0	5315817	5315617	50
PG 11	2 x	2,3	8,0	24,0	35,0	5315820	5315620	50
PG 11	2 x	3,0	8,0	24,0	35,0	5315821	5315621	50
PG 11	2 x	3,5	8,0	24,0	35,0	5315110	5315500	50
PG 11	2 x	4,0	8,0	27,0	38,0	5315822	5315622	50
PG 11	2 x	5,0	8,0	24,0	35,0	5315111	5315501	50
PG 11	2 x	6,0	8,0	27,0	38,0	5315112	5315502	50
PG 11	3 x	3,0	8,0	24,0	35,0	5315823	5315623	50
PG 11	3 x	3,5	8,0	24,0	35,0	5315113	5315503	50
PG 11	3 x	4,0	8,0	24,0	36,0	5315824	5315624	50
PG 11	3 x	5,0	8,0	27,0	38,0	5315114	5315504	50
PG 11	3 x	5,3	8,0	24,0	35,0	5315825	5315625	50
PG 11	4 x	1,5	8,0	27,0	38,0	5315826	5315626	50
PG 11	4 x	3,5	8,0	24,0	35,0	5315827	5315627	50
PG 11	6 x	2,0	8,0	24,0	35,0	5315828	5315628	50
PG 11	6 x	2,5	8,0	24,0	35,0	5315829	5315629	50
PG 13,5	2 x	3,0	9,0	24,0	36,0	5315830	5315630	50
PG 13,5	2 x	5,0	9,0	24,0	36,0	5315831	5315631	50
PG 13,5	2 x	6,0	9,0	24,0	36,0	5315130	5315510	50
PG 13,5	3 x	2,0	9,0	24,0	36,0	5315832	5315632	50
PG 13,5	3 x	3,0	9,0	24,0	36,0	5315833	5315633	50
PG 13,5	3 x	4,0	9,0	24,0	36,0	5315834	5315634	50
PG 13,5	3 x	5,3	9,0	24,0	36,0	5315835	5315635	50
PG 13,5	3 x	6,0	9,0	27,0	38,0	5315836	5315636	50
PG 13,5	4 x	3,0	9,0	24,0	36,0	5315837	5315637	50
PG 13,5	4 x	4,0	9,0	24,0	36,0	5315838	5315638	50
PG 13,5	4 x	5,0	9,0	27,0	38,0	5315839	5315639	50
PG 13,5	4 x	5,3	9,0	27,0	38,0	5315840	5315640	50
PG 13,5	6 x	3,5	9,0	24,0	36,0	5315841	5315641	50
PG 13,5	10 x	2,0	9,0	24,0	36,0	5315842	5315642	50


vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW (L) mm SW mm	ukupna duljina mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG 16	2 x	4,0	10,0	27,0	40,0	5315850	5315650	50
PG 16	2 x	5,0	10,0	27,0	40,0	5315851	5315651	50
PG 16	2 x	6,0	10,0	33,0	42,0	5315852	5315652	50
PG 16	2 x	7,0	10,0	27,0	40,0	5315160	5315515	50
PG 16	2 x	8,0	10,0	33,0	42,0	5315853	5315653	50
PG 16	2 x	9,0	10,0	27,0	40,0	5315854	5315654	50
PG 16	3 x	3,0	10,0	27,0	40,0	5315855	5315655	50
PG 16	3 x	4,0	10,0	27,0	40,0	5315856	5315656	50
PG 16	3 x	5,0	10,0	27,0	40,0	5315857	5315516	50
PG 16	3 x	5,6	10,0	27,0	40,0	5315858	5315658	50
PG 16	3 x	6,0	10,0	33,0	42,0	5315859	5315659	50
PG 16	3 x	7,0	10,0	27,0	40,0	5315860	5315660	50
PG 16	3 x	8,0	10,0	33,0	42,0	5315861	5315661	50
PG 16	4 x	4,0	10,0	27,0	40,0	5315862	5315662	50
PG 16	4 x	5,0	10,0	33,0	42,0	5315863	5315663	50
PG 16	4 x	6,0	10,0	33,0	40,0	5315864	5315664	50
PG 16	5 x	4,0	10,0	33,0	42,0	5315865	5315665	50
PG 16	5 x	5,0	10,0	27,0	40,0	5315866	5315666	50
PG 16	6 x	4,0	10,0	27,0	40,0	5315867	5315667	50
PG 16	7 x	4,0	10,0	27,0	40,0	5315868	5315668	50
PG 21	2 x	4,5	11,0	33,0	44,0	5315869	5315669	20
PG 21	2 x	8,0	11,0	42,0	48,0	5315870	5315670	20
PG 21	2 x	8,7	11,0	33,0	44,0	5315871	5315671	20
PG 21	2 x	9,0	11,0	42,0	44,0	5315872	5315672	20
PG 21	2 x	11,0	11,0	42,0	48,0	5315873	5315673	20
PG 21	3 x	7,0	11,0	33,0	44,0	5315210	5315520	20
PG 21	3 x	8,0	11,0	42,0	48,0	5315211	5315521	20
PG 21	3 x	9,0	11,0	42,0	48,0	5315874	5315674	20
PG 21	4 x	5,0	11,0	42,0	48,0	5315875	5315675	20
PG 21	4 x	6,0	11,0	33,0	44,0	5315212	5315522	20
PG 21	4 x	7,5	11,0	42,0	48,0	5315876	5315676	20
PG 21	4 x	8,0	11,0	42,0	48,0	5315213	5315523	20
PG 21	5 x	5,0	11,0	33,0	44,0	5315877	5315677	20
PG 21	5 x	6,0	11,0	42,0	48,0	5315214	5315524	20
PG 21	5 x	6,5	11,0	42,0	48,0	5315215	5315525	20
PG 21	6 x	4,0	11,0	33,0	44,0	5315878	5315678	20
PG 21	6 x	5,0	11,0	42,0	48,0	5315879	5315679	20
PG 21	6 x	6,0	11,0	42,0	48,0	5315216	5315526	20
PG 21	6 x	6,5	11,0	42,0	48,0	5315217	5315527	20
PG 21	6 x	7,0	11,0	33,0	44,0	5315218	5315528	20
PG 21	7 x	6,0	11,0	33,0	44,0	5315219	5315529	20
PG 21	8 x	4,0	11,0	33,0	44,0	5315880	5315683	20
PG 21	8 x	5,0	11,0	33,0	44,0	5315220	5315530	20
PG 21	11 x	5,0	11,0	33,0	44,0	5315221	5315531	20
PG 21	21 x	2,0	11,0	42,0	48,0	5315881	5315684	20
PG 21	28 x	3,0	11,0	33,0	44,0	5315222	5315532	20
PG 29	2 x	9,0	12,0	42,0	48,0	5315289	5315690	20
PG 29	2 x	11,0	12,0	42,0	48,0	5315891	5315691	20
PG 29	2 x	12,0	12,0	42,0	48,0	5315892	5315692	20
PG 29	3 x	9,0	12,0	42,0	48,0	5315893	5315693	20
PG 29	3 x	11,0	12,0	42,0	48,0	5315894	5315694	20
PG 29	4 x	8,0	12,0	42,0	48,0	5315290	5315540	20
PG 29	4 x	9,0	12,0	42,0	48,0	5315895	5315695	20
PG 29	4 x	10,0	12,0	42,0	48,0	5315896	5315696	20
PG 29	6 x	6,0	12,0	42,0	48,0	5315897	5315697	20
PG 29	6 x	6,5	12,0	42,0	48,0	5315292	5315542	20
PG 29	6 x	7,0	12,0	42,0	48,0	5315293	5315543	20
PG 29	7 x	6,0	12,0	42,0	48,0	5315294	5315544	20
PG 29	7 x	7,0	12,0	42,0	48,0	5315898	5315698	20
PG 29	8 x	5,0	12,0	42,0	48,0	5315899	5315699	20
PG 29	8 x	6,0	12,0	42,0	48,0	5315295	5315545	20
PG 29	10 x	6,0	12,0	42,0	48,0	5315900	5315700	20
PG 29	11 x	5,0	12,0	42,0	48,0	5315296	5315546	20
PG 29	28 x	3,0	12,0	42,0	48,0	5315297	5315547	20

Uvodnica kabelska WADI-TEC Duplo

Poliamid
brtva sa više otvora
metrički navoj, kratki

Cable gland WADI-TEC Duplo

Polyamide
multi-holed sealing
metric thread, short





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: poliamid 6, ojačano s 25% staklenih vlakana
- 2: brtva: tefabloc

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: metrički
- kratki navoj
- duga brtva sa više otvora
- brtvljenje otvora
- bez potrebe za čepovima otvora brtve

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- fotonaponski sustavi
- tehnologija automatizacije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- 1/3: Gland element/Cap nut: Polyamide 6, 25 % glassfiber reinforced
- 2: Sealing: Tefabloc

Temperature range:
-30°C to 120°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: metric
- short thread
- long multi-holed sealing
- Blind hole sealing
- No blind pin required

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Photovoltaic
- Automation technology
- measuring and control engineering

vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW (L) mm SW mm	ukupna duljina mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
M 16 x 1,5	2 x	1,0	8,0	19,0	32,0	5316100	5318100	50
M 16 x 1,5	2 x	3,0	8,0	19,0	32,0	5316101	5318101	50
M 16 x 1,5	2 x	3,5	8,0	19,0	32,0	5316102	5318102	50
M 16 x 1,5	2 x	4,0	8,0	19,0	32,0	5316103	5318103	50
M 16 x 1,5	3 x	3,0	8,0	19,0	32,0	5316104	5318104	50
M 20 x 1,5	2 x	3,0	9,0	24,0	36,0	5316200	5318200	50
M 20 x 1,5	2 x	4,0	9,0	27,0	39,0	5316201	5318201	50
M 20 x 1,5	2 x	5,0	9,0	27,0	39,0	5316202	5318202	50
M 20 x 1,5	2 x	6,0	9,0	27,0	39,0	5316203	5318203	50
M 20 x 1,5	2 x	7,0	9,0	27,0	39,0	5316204	5318204	50
M 20 x 1,5	3 x	2,0	9,0	24,0	36,0	5316205	5318205	50
M 20 x 1,5	3 x	3,0	9,0	27,0	39,0	5316206	5318206	50
M 20 x 1,5	3 x	4,0	9,0	27,0	39,0	5316207	5318207	50
M 20 x 1,5	3 x	5,0	9,0	27,0	39,0	5316208	5318208	50
M 20 x 1,5	3 x	5,6	9,0	27,0	39,0	5316209	5318209	50
M 20 x 1,5	3 x	6,0	9,0	27,0	39,0	5316210	5318210	50
M 20 x 1,5	4 x	3,0	9,0	24,0	36,0	5316211	5318211	50
M 20 x 1,5	4 x	4,0	9,0	27,0	39,0	5316212	5318212	50
M 20 x 1,5	5 x	4,0	9,0	27,0	39,0	5316213	5318213	50
M 20 x 1,5	5 x	5,0	9,0	27,0	39,0	5316214	5318214	50
M 20 x 1,5	6 x	3,5	9,0	24,0	36,0	5316215	5318215	50
M 20 x 1,5	6 x	4,0	9,0	27,0	39,0	5316216	5318216	50
M 20 x 1,5	10 x	2,0	9,0	24,0	36,0	5316217	5318217	50
M 25 x 1,5	2 x	4,5	11,0	33,0	44,0	5316300	5318300	20
M 25 x 1,5	2 x	8,0	11,0	33,0	44,0	5316301	5318301	20
M 25 x 1,5	3 x	7,0	11,0	33,0	44,0	5316302	5318302	20
M 25 x 1,5	3 x	8,0	11,0	33,0	44,0	5316303	5318303	20
M 25 x 1,5	4 x	5,0	11,0	33,0	44,0	5316304	5318304	20
M 25 x 1,5	4 x	6,0	11,0	33,0	44,0	5316305	5318305	20
M 25 x 1,5	5 x	5,0	11,0	33,0	44,0	5316306	5318306	20
M 25 x 1,5	5 x	6,0	11,0	33,0	44,0	5316307	5318307	20
M 25 x 1,5	5 x	6,5	11,0	33,0	44,0	5316308	5318308	20
M 25 x 1,5	6 x	4,0	11,0	33,0	44,0	5316309	5318309	20
M 25 x 1,5	6 x	5,0	11,0	33,0	44,0	5316310	5318310	20
M 25 x 1,5	8 x	4,0	11,0	33,0	44,0	5316311	5318311	20
M 25 x 1,5	8 x	5,0	11,0	33,0	44,0	5316312	5318312	20
M 25 x 1,5	21 x	2,0	11,0	33,0	44,0	5316313	5318313	20
M 32 x 1,5	2 x	9,0	12,0	42,0	55,0	5316400	5318400	20
M 32 x 1,5	2 x	11,0	12,0	42,0	55,0	5316401	5318401	20


vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW (L) mm SW mm	ukupna duljina mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
M 32 x 1,5	2 x	12,0	12,0	42,0	55,0	5316402	5318402	20
M 32 x 1,5	3 x	9,0	12,0	42,0	55,0	5316403	5318403	20
M 32 x 1,5	3 x	11,0	12,0	42,0	55,0	5316404	5318404	20
M 32 x 1,5	4 x	8,0	12,0	42,0	55,0	5316405	5318405	20
M 32 x 1,5	4 x	9,0	12,0	42,0	55,0	5316406	5318406	20
M 32 x 1,5	4 x	10,0	12,0	42,0	55,0	5316407	5318407	20
M 32 x 1,5	6 x	6,0	12,0	42,0	55,0	5316408	5318408	20
M 32 x 1,5	6 x	6,5	12,0	42,0	55,0	5316409	5318409	20
M 32 x 1,5	6 x	7,0	12,0	42,0	55,0	5316410	5318410	20
M 32 x 1,5	7 x	6,0	12,0	42,0	55,0	5316411	5318411	20
M 32 x 1,5	7 x	7,0	12,0	42,0	55,0	5316412	5318412	20
M 32 x 1,5	8 x	5,0	12,0	42,0	55,0	5316413	5318413	20
M 32 x 1,5	8 x	6,0	12,0	42,0	55,0	5316414	5318414	20
M 32 x 1,5	10 x	6,0	12,0	42,0	55,0	5316415	5318415	20
M 32 x 1,5	11 x	5,0	12,0	42,0	55,0	5316416	5318416	20
M 32 x 1,5	28 x	3,0	12,0	42,0	55,0	5316417	5318417	20


Uvodnica kabelska WADI-TEC

PVDF
ECA-stezni prsten/ duga brtva
metrički navoj, dugi

Cable gland WADI-TEC

PVDF
ECA-Clamping-Ring/ long sealing
metric thread, long





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: polivinildenfluorid
- 2: ECA-stezni prsten: polikarbonat
- 4: kratka brtva: santopren duga brtva: nitril

Radna temperatura:
ECA: -40°C do 120°C
duga brtva: -25°C do 120°C

Boje/izvedbe:
- vanjski navoj: metrički
- dugi navoj
- ECA-stezni prsten
- duga brtva, 2-djelna

Svojstva:
- bez halogena
- zaštita od izvlačenja pomoću ECA-steznog prstena
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima
- UV otpornost

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- prehrambena industrija
- tehnologija čistih soba
- proizvodnja mlijeka/sireva

Material:
- 1/3: Gland element/Cap nut: Polyvinylidenefluoride
- 2: ECA-Clamping-Ring: Polycarbonate
- 4: short Sealing: Santoprene long Sealing: Nitrile

Temperature range:
ECA: -40°C to 120°C
long Sealing: -25°C to 120°C

Colour(s)/Designs:
- External thread: metric
- long thread
- ECA-Clamping-Ring
- long Sealing, two parts

Characteristics:
- free of halogen
- strain relief through ECA-Clamping-Ring
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts
- UV resistance

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Measuring and control engineering
- Plant installations
- Food Industries
- Cleanroom technology
- Dairies



ECA
ECA



duga brtva, 2-djelna
long Sealing, two parts

vanjski navoj External thread	za kabel promjera mm Clamping range mm	broj artikla PVDF Art. no. PVDF	za kabel promjera mm Clamping range mm	broj artikla PVDF Art. no. PVDF	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	ukupna duljina (L) mm Complete length (L) mm	JP kom. PU pcs.
M 12 x 1,5	3,0 - 6,0	5330012 *	-	-	15,0	15,0	38,0	50
M 16 x 1,5	5,0 - 8,0	5330016 *	3,0 - 8,0	5330216 *	15,0	19,0	39,0	50
M 20 x 1,5/13	8,0 - 12,0	5330020 *	6,0 - 12,5	5330220 *	15,0	24,0	42,0	50
M 20 x 1,5/16	10,0 - 14,0	5330021 *	7,0 - 14,5	5330221 *	15,0	33,0	45,0	20
M 25 x 1,5	11,5 - 18,0	5330025 *	10,0 - 18,0	5330225 *	15,0	33,0	48,0	20
M 32 x 1,5	15,0 - 24,0	5330032 *	14,0 - 24,0	5330232 *	15,0	42,0	58,0	20


* **u postupku izlaska iz proizvodnje** / * Phase-out type

Uvodnica kabelska WADI-TEC

mesing niklani
ECA-stezni prsten
PG-navoj

Cable gland WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
PG-thread





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: tefabloc
- 4: brtva za vanjski navoj: nitril
- 5: ECA-stezni prsten:
  PG 7-29: polikarbonat (PC)
  PG 36-48: ∗ polioksimetilen (POM)

Radna temperatura:
PC: -25°C do 120°C
∗POM: -30°C do 95°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki/dugi navoj
- ECA-stezni prsten

Svojstva:
- zaštita od izvlačenja pomoću steznog prstena
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- kemijska industrija

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Tefabloc
- 4: Sealing for external thread: Nitrile
- 5: ECA-Clamping-Ring
  PG 7-29: Polycarbonate (PC)
  PG 36-48: ∗ Polyoxymethylene (POM)

Temperature range:
PC: -25°C to 120°C
∗POM: -30°C to 95°C

Colour(s)/Designs:
- External thread: PG
- short/long thread
- ECA-Clamping-Ring

Characteristics:
- strain relief through clamping ring
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Chemical industry


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread						
PG 7	3,0 - 6,0	5,0	14,0	24,0	4221079	50
PG 9	5,0 - 8,0	6,0	17,0	25,0	4221095	50
PG 11	6,0 - 10,0	6,0	20,0	26,0	4221117	50
PG 13,5	8,0 - 12,0	6,5	22,0	28,0	4221133	50
PG 16	9,5 - 14,0	6,5	24,0	30,0	4221168	50
PG 21	11,5 - 18,0	7,0	30,0	35,0	4221214	20
PG 29	15,0 - 24,0	8,0	40,0	43,0	4221290	20
PG 36∗	23,0 - 30,0	9,0	50,0	50,0	4221362	10
PG 42∗	26,0 - 35,0	10,0	58,0	57,0	4221427	5
PG 48∗	35,0 - 40,0	10,0	64,0	59,0	4221486	5
dugi navoj / long thread						
PG 7	3,0 - 6,0	15,0	14,0	34,0	4221507	50
PG 9	5,0 - 8,0	15,0	17,0	34,0	4221509	50
PG 11	6,0 - 10,0	15,0	20,0	35,0	4221511	50
PG 13,5	8,0 - 12,0	15,0	22,0	36,5	4221513	50
PG 16	9,5 - 14,0	15,0	24,0	38,5	4221516	50
PG 21	11,5 - 18,0	15,0	30,0	43,0	4221521	20
PG 29	15,0 - 24,0	15,0	40,0	50,0	4221529	20
PG 36∗	23,0 - 30,0	18,0	50,0	59,0	4221536	10
PG 42∗	26,0 - 35,0	18,0	58,0	65,0	4221542	5
PG 48∗	35,0 - 40,0	18,0	64,0	67,0	4221548	5

Uvodnica kabelska WADI-TEC

mesing niklani
ECA-stezni prsten
metrički navoj

Cable gland WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
metric thread





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: tefabloc
- 4: brtva za vanjski navoj: nitril
- 5: ECA-stezni prsten:
  PG 7-29: polikarbonat (PC)
  PG 36-48: ∗ polioksimetilen (POM)

Radna temperatura:
PC: -25°C do 120°C
∗POM: -30°C do 95°C

Boje/izvedbe:
- vanjski navoj: metrički
- ECA-stezni prsten
- kratki/dugi navoj

Svojstva:
- zaštita od izvlačenja pomoću steznog prstena
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- kemijska industrija

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Tefabloc
- 4: Sealing for external thread: Nitrile
- 5: ECA-Clamping-Ring
  PG 7-29: Polycarbonate (PC)
  PG 36-48: ∗ Polyoxymethylene (POM)

Temperature range:
PC: -25°C to 120°C
∗POM: -30°C to 95°C

Colour(s)/Designs:
- External thread: metric
- ECA-Clamping-Ring
- short/long thread

Characteristics:
- strain relief through clamping ring
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Chemical industry


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU
kratki navoj / short thread							
M 12 x 1,5	3,0 - 6,0	7,0	14,0	14,0	27,0	4221714	50
M 16x1,5/7	3,0 - 6,0	7,0	14,0	17,0	27,0	4221716	50
M 16x1,5/9	5,0 - 8,0	7,0	17,0	17,0	27,0	4221717	50
M 20x1,5/11	6,0 - 10,0	7,0	20,0	22,0	28,0	4221720	50
M 20x1,5/13	8,0 - 12,0	7,0	22,0	22,0	29,0	4221721	50
M 25x1,5/16	9,5 - 14,0	8,0	24,0	26,0	31,0	4221725	20
M 25x1,5/21	11,5 - 18,0	8,0	30,0	30,0	37,0	4221726	20
M 32x1,5/21	11,5 - 18,0	8,5	30,0	33,0	38,0	4221732	10
M 32x1,5/29	15,0 - 24,0	8,5	40,0	40,0	45,0	4221733	10
M 40 x 1,5	15,0 - 24,0	8,5	40,0	42,0	45,0	4221740	5
M 50 x 1,5∗	23,0 - 30,0	9,5	50,0	55,0	51,0	4221750	5
M 63 x 1,5∗	26,0 - 35,0	10,5	58,0	70,0	58,0	4221760	5
dugi navoj / long thread							
M 12 x 1,5	3,0 - 6,0	13,0	14,0	14,0	33,0	4221712	50
M 16x1,5/7	3,0 - 6,0	13,0	14,0	17,0	33,0	4221718	50
M 16x1,5/9	5,0 - 8,0	13,0	17,0	17,0	33,0	4221719	50
M 20x1,5/11	6,0 - 10,0	13,0	20,0	22,0	34,0	4221722	50
M 20x1,5/13	8,0 - 12,0	13,0	22,0	22,0	35,0	4221723	50
M 25x1,5/16	9,5 - 14,0	14,0	24,0	26,0	37,0	4221727	20
M 25x1,5/21	11,5 - 18,0	14,0	30,0	30,0	43,0	4221728	20
M 32x1,5/21	11,5 - 18,0	14,5	30,0	33,0	44,0	4221734	20
M 32x1,5/29	15,0 - 24,0	14,5	40,0	40,0	51,0	4221735	10
M 40 x 1,5	15,0 - 24,0	14,5	40,0	42,0	51,0	4221741	5
M 50 x 1,5∗	23,0 - 30,0	15,5	50,0	55,0	57,0	4221751	5
M 63 x 1,5∗	26,0 - 35,0	16,5	58,0	70,0	64,0	4221761	5

Uvodnica kabelska WADI-TEC

mesing niklani
za plosnati kabel
PG-navoj

Cable gland WADI-TEC

nickel-plated brass
flat cable sealing
PG-thread





RoHS | IP 68

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: tefabloc
- 4: brtva za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki/dugi navoj
- duga brtva za plosnati kabel zaobljeni, pravokutni, ovalni

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- kemijska industrija

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Tefabloc
- 4: Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: PG
- short/long thread
- long sealing for flat cables round, angular, oval

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Chemical industry


	plosnati kabel zaobljeni Flat cable, round		plosnati kabel pravokutni Flat cable, angular		plosnati kabel ovalni Flat cable, oval		
vanjski navoj External thread	**za kabel promjera mm** Clamping range mm	**broj artikla niklani** Art. no. nickel-plated	**za kabel promjera mm** Clamping range mm	**broj artikla niklani** Art. no. nickel-plated	**za kabel promjera mm** Clamping range mm	**broj artikla niklani** Art. no. nickel-plated	**JP kom.** PU pcs.
kratki navoj / short thread							
PG 9	3,5 x 5,5	4224300					50
PG 11	2,8 x 10,5	4224305					50
PG 11	3,5 x 9,0	4224306					50
PG 11	4,0 x 6,0	4224307					50
PG 13,5	3,0 x 12,0	4224310			5,0 x 8,0	4224375	50
PG 13,5	5,0 x 11,0	4224311			5,0 x 12,0	4224376	50
PG 16	5,0 x 12,0	4224315	8,0 x 12,0	4224351	5,0 x 12,0	4224390	25
PG 16	7,5 x 14,0	4224317			5,5 x 8,5	4224380	25
PG 16					6,0 x 10,0	4224382	25
PG 16					7,0 x 14,0	4224384	25
PG 16/21	5,0 x 16,0	4224316			5,0 x 15,0	4224381	20
PG 16/21					6,0 x 15,0	4224383	20
PG 21	5,0 x 17,0	4224320	4,0 x 15,0	4224355	5,0 x 16,0	4224385	20
PG 21	7,0 x 18,0	4224321			7,0 x 16,5	4224386	20
PG 21	9,0 x 15,0	4224322					20
PG 21/29					7,0 x 20,0	4224387	10
PG 29	8,0 x 25,0	4224326					10
PG 29	10,0 x 25,0	4224327					10
dugi navoj / long thread							
PG 9	3,5 x 5,5	4224450					50
PG 11	2,8 x 10,5	4224455					50
PG 11	3,5 x 9,0	4224456					50
PG 11	4,0 x 6,0	4224457					50
PG 13,5	3,0 x 12,0	4224460			5,0 x 8,0	4224575	50
PG 13,5	5,0 x 11,0	4224461			5,0 x 12,0	4224576	50
PG 16	5,0 x 12,0	4224465	8,0 x 12,0	4224551	5,0 x 12,0	4224590	25
PG 16	7,5 x 14,0	4224467			5,5 x 8,5	4224580	25
PG 16					6,0 x 10,0	4224582	25
PG 16					7,0 x 14,0	4224584	25
PG 16/21	5,0 x 16,0	4224466			5,0 x 15,0	4224581	20
PG 16/21					6,0 x 15,0	4224583	20
PG 21	5,0 x 17,0	4224480	4,0 x 15,0	4224555	5,0 x 16,0	4224585	20
PG 21	7,0 x 18,0	4224481			7,0 x 16,5	4224586	20
PG 21	9,0 x 15,0	4224482					20
PG 21/29					7,0 x 20,0	4224587	10
PG 29	8,0 x 25,0	4224506					10
PG 29	10,0 x 25,0	4224507					10

Uvodnica kabelska WADI-TEC

mesing niklani
za plosnati kabel
metrički navoj

Cable gland WADI-TEC

nickel-plated brass
flat cable sealing
metric thread





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: tefabloc
- 4: brtva za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki/dugi navoj
- duga brtva za plosnati kabel zaobljeni, pravokutni, ovalni

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- kemijska industrija

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Tefabloc
- 4: Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: metric
- short/long thread
- long sealing for flat cables round, angular, oval

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Chemical industry

	plosnati kabel zaobljeni Flat cable, round		plosnati kabel pravokutni Flat cable, angular		plosnati kabel ovalni Flat cable, oval		
vanjski navoj External thread	za kabel promjera mm Clamping range mm	broj artikla niklani Art. no. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklani Art. no. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread							
M 16 x 1,5/9	3,5 x 5,5	4224700					50
M 20 x 1,5/11	2,8 x 10,5	4224705					50
M 20 x 1,5/11	3,5 x 9,0	4224706					50
M 20 x 1,5/11	4,0 x 6,0	4224707					50
M 20 x 1,5/13	3,0 x 12,0	4224710			5,0 x 8,0	4224775	50
M 20 x 1,5/13	5,0 x 11,0	4224711			5,0 x 12,0	4224776	50
M 25 x 1,5/16	5,0 x 12,0	4224715	8,0 x 12,0	4224751	5,0 x 12,0	4224790	20
M 25 x 1,5/16	7,5 x 14,0	4224717			5,5 x 8,5	4224780	20
M 25 x 1,5/16					6,0 x 10,0	4224781	20
M 25 x 1,5/16					7,0 x 14,0	4224782	20
M 25 x 1,5/21	5,0 x 16,0	4224716	4,0 x 15,0	4224755	5,0 x 15,0	4224784	20
M 25 x 1,5/21	5,0 x 17,0	4224720			5,0 x 16,0	4224785	20
M 25 x 1,5/21	7,0 x 18,0	4224721			6,0 x 15,0	4224783	20
M 25 x 1,5/21	9,0 x 15,0	4224722			7,0 x 16,5	4224786	20
M 32 x 1,5/29	8,0 x 25,0	4224726			7,0 x 20,0	4224787	10
M 32 x 1,5/29	10,0 x 25,0	4224727					10
dugi navoj / long thread							
M 16 x 1,5/9	3,5 x 5,5	4224600					50
M 20 x 1,5/11	2,8 x 10,5	4224605					50
M 20 x 1,5/11	3,5 x 9,0	4224606					50
M 20 x 1,5/11	4,0 x 6,0	4224607					50
M 20 x 1,5/13	3,0 x 12,0	4224610			5,0 x 8,0	4224675	50
M 20 x 1,5/13	5,0 x 11,0	4224611			5,0 x 12,0	4224676	50
M 25 x 1,5/16	5,0 x 12,0	4224615	8,0 x 12,0	4224651	5,0 x 12,0	4224690	20
M 25 x 1,5/16	7,5 x 14,0	4224617			5,5 x 8,5	4224680	20
M 25 x 1,5/16					6,0 x 10,0	4224681	20
M 25 x 1,5/16					7,0 x 14,0	4224682	20
M 25 x 1,5/21	5,0 x 16,0	4224616	4,0 x 15,0	4224655	5,0 x 15,0	4224684	20
M 25 x 1,5/21	5,0 x 17,0	4224620			5,0 x 16,0	4224685	20
M 25 x 1,5/21	7,0 x 18,0	4224621			6,0 x 15,0	4224683	20
M 25 x 1,5/21	9,0 x 15,0	4224622			7,0 x 16,5	4224686	20
M 32 x 1,5/29	8,0 x 25,0	4224626			7,0 x 20,0	4224687	10
M 32 x 1,5/29	10,0 x 25,0	4224627					10


Uvodnica kabelska WADI-TEC Duplo

mesing niklani
brtva sa više otvora
PG-navoj, kratki

Cable gland WADI-TEC Duplo

nickel-plated brass
multi-holed sealing
PG-thread, short

RoHS | IP 68





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: tefabloc
- 4: brtva za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- duga brtva sa više otvora
- brtvljenje otvora
- bez potrebe za čepovima otvora brtve

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- kemijska industrija

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Tefabloc
- 4: Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: PG
- short thread
- long multi-holed sealing
- Blind hole sealing
- No blind pin required

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Chemical industry

vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW 1/2 mm SW 1/2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG 7	1 x	4,0	5,0	14,0	24,0	4248640	50
PG 7	1 x	5,0	5,0	14,0	24,0	4248641	50
PG 9	1 x	5,0	6,0	17,0	25,0	4248642	50
PG 9	2 x	1,0	6,0	17,0	25,0	4248643	50
PG 9	2 x	3,0	6,0	17,0	25,0	4248644	50
PG 9	2 x	3,5	6,0	17,0	25,0	4248645	50
PG 9	2 x	4,0	6,0	17,0	25,0	4248646	50
PG 9	3 x	3,0	6,0	17,0	25,0	4248647	50
PG 9	4 x	3,0	6,0	20,0	26,0	4248648	50
PG 9	4 x	4,0	6,0	20,0	26,0	4248649	50
PG 11	2 x	2,3	6,0	20,0	26,0	4248650	50
PG 11	2 x	3,0	6,0	20,0	26,0	4248651	50
PG 11	2 x	3,5	6,0	20,0	26,0	4248405	50
PG 11	2 x	4,0	6,0	20,0	26,0	4248652	50
PG 11	2 x	5,0	6,0	20,0	26,0	4248660	50
PG 11	2 x	6,0	6,5	24,0	30,0	4248661	50
PG 11	3 x	3,0	6,0	20,0	26,0	4248653	50
PG 11	3 x	3,5	6,0	20,0	26,0	4248407	50
PG 11	3 x	4,0	6,0	20,0	26,0	4248654	50
PG 11	3 x	5,0	6,5	24,0	30,0	4248662	50
PG 11	3 x	5,3	6,5	22,0	28,0	4248655	50
PG 11	4 x	1,5	6,0	20,0	26,0	4248656	50
PG 11	4 x	3,5	6,0	20,0	26,0	4248657	50
PG 11	6 x	2,0	6,0	20,0	26,0	4248658	50
PG 11	6 x	2,5	6,0	20,0	26,0	4248659	50
PG 13,5	2 x	3,0	6,5	22,0	28,0	4248663	50
PG 13,5	2 x	5,0	6,5	22,0	28,0	4248664	50
PG 13,5	2 x	6,0	6,5	22,0	28,0	4248404	50
PG 13,5	3 x	2,0	6,5	22,0	28,0	4248665	50
PG 13,5	3 x	3,0	6,5	22,0	28,0	4248666	50
PG 13,5	3 x	4,0	6,5	22,0	28,0	4248667	50
PG 13,5	3 x	5,3	6,5	24,0	30,0	4248668	50
PG 13,5	3 x	6,0	6,5	24,0	30,0	4248669	50
PG 13,5	4 x	3,0	6,5	22,0	28,0	4248670	50
PG 13,5	4 x	4,0	6,5	22,0	28,0	4248671	50
PG 13,5	4 x	5,0	6,5	24,0	30,0	4248673	50
PG 13,5	4 x	5,3	6,5	24,0	30,0	4248672	50
PG 13,5	6 x	3,5	6,5	22,0	28,0	4248674	50
PG 13,5	10 x	2,0	6,5	22,0	28,0	4248675	50

vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW 1/2 mm SW 1/2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG 16	2 x	4,0	6,5	24,0	30,0	4248678	50
PG 16	2 x	5,0	6,5	24,0	30,0	4248679	50
PG 16	2 x	6,0	6,5	24,0	30,0	4248680	50
PG 16	2 x	7,0	6,5	24,0	30,0	4248409	50
PG 16	2 x	8,0	7,0	30,0	35,0	4248681	50
PG 16	2 x	9,0	7,0	30,0	35,0	4248682	50
PG 16	3 x	3,0	6,5	24,0	30,0	4248683	50
PG 16	3 x	4,0	6,5	24,0	30,0	4248684	50
PG 16	3 x	5,0	6,5	24,0	30,0	4248677	50
PG 16	3 x	5,6	6,5	24,0	30,0	4248685	50
PG 16	3 x	6,0	6,5	24,0	30,0	4248686	50
PG 16	3 x	7,0	7,0	30,0	35,0	4248695	50
PG 16	3 x	8,0	6,5	24,0	30,0	4248687	50
PG 16	4 x	4,0	6,5	24,0	30,0	4248688	50
PG 16	4 x	5,0	7,0	30,0	35,0	4248689	50
PG 16	4 x	6,0	7,0	30,0	35,0	4248694	50
PG 16	5 x	4,0	6,5	24,0	30,0	4248690	50
PG 16	5 x	5,0	7,0	30,0	35,0	4248691	50
PG 16	6 x	4,0	6,5	24,0	30,0	4248692	50
PG 16	7 x	4,0	7,0	30,0	35,0	4248693	50
PG 21	2 x	4,5	7,0	30,0	35,0	4248696	20
PG 21	2 x	8,0	7,0	30,0	35,0	4248697	20
PG 21	2 x	8,7	8,0	40,0	43,0	4248698	20
PG 21	2 x	9,0	8,0	40,0	43,0	4248699	20
PG 21	2 x	11,0	8,0	40,0	43,0	4248700	20
PG 21	3 x	7,0	7,0	30,0	35,0	4248542	20
PG 21	3 x	8,0	7,0	30,0	35,0	4248531	20
PG 21	3 x	9,0	8,0	40,0	43,0	4248701	20
PG 21	4 x	5,0	7,0	30,0	35,0	4248702	20
PG 21	4 x	6,0	7,0	30,0	35,0	4248529	20
PG 21	4 x	7,5	8,0	40,0	43,0	4248709	20
PG 21	4 x	8,0	8,0	40,0	43,0	4248703	20
PG 21	5 x	5,0	7,0	30,0	35,0	4248704	20
PG 21	5 x	6,0	7,0	30,0	35,0	4248539	20
PG 21	5 x	6,5	7,0	30,0	35,0	4248541	20
PG 21	6 x	4,0	7,0	30,0	35,0	4248705	20
PG 21	6 x	5,0	7,0	30,0	35,0	4248706	20
PG 21	6 x	6,0	8,0	40,0	43,0	4248713	20
PG 21	6 x	6,5	8,0	40,0	43,0	4248710	20
PG 21	6 x	7,0	8,0	40,0	43,0	4248715	20
PG 21	7 x	6,0	8,0	40,0	43,0	4248714	20
PG 21	8 x	4,0	7,0	30,0	35,0	4248707	20
PG 21	8 x	5,0	7,0	30,0	35,0	4248543	20
PG 21	11 x	5,0	8,0	40,0	43,0	4248712	20
PG 21	21 x	2,0	7,0	30,0	35,0	4248708	20
PG 21	28 x	3,0	8,0	40,0	43,0	4248711	20
PG 29	2 x	9,0	8,0	40,0	43,0	4248716	20
PG 29	2 x	11,0	8,0	40,0	43,0	4248717	20
PG 29	3 x	9,0	8,0	40,0	43,0	4248719	20
PG 29	3 x	11,0	8,0	40,0	43,0	4248720	20
PG 29	4 x	8,0	8,0	40,0	43,0	4248629	20
PG 29	4 x	9,0	8,0	40,0	43,0	4248721	20
PG 29	4 x	10,0	8,0	40,0	43,0	4248722	20
PG 29	6 x	6,0	8,0	40,0	43,0	4248627	20
PG 29	6 x	6,5	8,0	40,0	43,0	4248610	20
PG 29	6 x	7,0	8,0	40,0	43,0	4248614	20
PG 29	7 x	6,0	8,0	40,0	43,0	4248631	20
PG 29	7 x	7,0	8,0	40,0	43,0	4248723	20
PG 29	8 x	5,0	8,0	40,0	43,0	4248724	20
PG 29	8 x	6,0	8,0	40,0	43,0	4248632	20
PG 29	10 x	6,0	8,0	40,0	43,0	4248725	20
PG 29	11 x	5,0	8,0	40,0	43,0	4248634	20
PG 29	28 x	3,0	8,0	40,0	43,0	4248612	20


Uvodnica kabelska WADI-TEC Duplo

mesing niklani
brtva sa više otvora
metrički navoj, kratki

Cable gland WADI-TEC Duplo

nickel-plated brass
multi-holed sealing
metric thread, short

RoHS | IP 68 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: brtva: tefabloc
- 4: brtva za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- duga brtva sa više otvora
- brtvljenje otvora
- bez potrebe za čepovima otvora brtve

Svojstva:
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- kemijska industrija

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Tefabloc
- 4: Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: metric
- short thread
- long multi-holed sealing
- Blind hole sealing
- No blind pin required

Characteristics:
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Chemical industry

vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	2 x	1,0	7,0	17,0	17,0	13,0	4249600	50
M 16 x 1,5	2 x	3,0	7,0	17,0	17,0	13,0	4249601	50
M 16 x 1,5	2 x	3,5	7,0	17,0	17,0	13,0	4249602	50
M 16 x 1,5	2 x	4,0	7,0	17,0	17,0	13,0	4249603	50
M 16 x 1,5	3 x	3,0	7,0	17,0	17,0	13,0	4249604	50
M 20 x 1,5	2 x	2,3	7,0	20,0	22,0	28,0	4249610	50
M 20 x 1,5	2 x	3,0	7,0	22,0	22,0	29,0	4249611	50
M 20 x 1,5	2 x	3,5	7,0	20,0	22,0	28,0	4249612	50
M 20 x 1,5	2 x	4,0	7,0	20,0	22,0	28,0	4249613	50
M 20 x 1,5	2 x	5,0	7,0	22,0	22,0	29,0	4249614	50
M 20 x 1,5	2 x	6,0	7,0	22,0	22,0	29,0	4249615	50
M 20 x 1,5	3 x	2,0	7,0	22,0	22,0	29,0	4249616	50
M 20 x 1,5	3 x	3,0	7,0	22,0	22,0	29,0	4249617	50
M 20 x 1,5	3 x	3,5	7,0	20,0	22,0	28,0	4249618	50
M 20 x 1,5	3 x	4,0	7,0	22,0	22,0	29,0	4249619	50
M 20 x 1,5	3 x	5,3	7,0	22,0	22,0	29,0	4249620	50
M 20 x 1,5	4 x	1,5	7,0	20,0	22,0	28,0	4249621	50
M 20 x 1,5	4 x	3,0	7,0	22,0	22,0	29,0	4249622	50
M 20 x 1,5	4 x	3,5	7,0	20,0	22,0	28,0	4249623	50
M 20 x 1,5	4 x	4,0	7,0	22,0	22,0	29,0	4249624	50
M 20 x 1,5	6 x	2,0	7,0	20,0	22,0	28,0	4249625	50
M 20 x 1,5	6 x	2,5	7,0	20,0	22,0	28,0	4249626	50
M 20 x 1,5	6 x	3,5	7,0	22,0	22,0	29,0	4249627	50
M 20 x 1,5	10 x	2,0	7,0	22,0	22,0	29,0	4249628	50
M 25 x 1,5	2 x	4,0	8,0	24,0	26,0	31,0	4249640	20
M 25 x 1,5	2 x	4,5	8,0	30,0	30,0	37,0	4249641	20
M 25 x 1,5	2 x	5,0	8,0	24,0	26,0	31,0	4249642	20
M 25 x 1,5	2 x	6,0	8,0	24,0	26,0	31,0	4249643	20
M 25 x 1,5	2 x	7,0	8,0	24,0	26,0	31,0	4249644	20
M 25 x 1,5	2 x	8,0	8,0	30,0	30,0	37,0	4249645	20
M 25 x 1,5	3 x	3,0	8,0	24,0	26,0	31,0	4249646	20
M 25 x 1,5	3 x	4,0	8,0	24,0	26,0	31,0	4249647	20
M 25 x 1,5	3 x	5,0	8,0	24,0	26,0	31,0	4249648	20
M 25 x 1,5	3 x	5,6	8,0	24,0	26,0	31,0	4249649	20
M 25 x 1,5	3 x	6,0	8,0	24,0	26,0	31,0	4249650	20
M 25 x 1,5	3 x	7,0	8,0	30,0	30,0	37,0	4249651	20
M 25 x 1,5	3 x	8,0	8,0	30,0	30,0	37,0	4249652	20
M 25 x 1,5	4 x	4,0	8,0	24,0	26,0	31,0	4249653	20
M 25 x 1,5	4 x	5,0	8,0	30,0	30,0	37,0	4249654	20
M 25 x 1,5	4 x	6,0	8,0	30,0	30,0	37,0	4249655	20
M 25 x 1,5	5 x	4,0	8,0	24,0	26,0	31,0	4249656	20
M 25 x 1,5	5 x	5,0	8,0	30,0	30,0	37,0	4249657	20


vanjski navoj External thread	broj otvora Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 25 x 1,5	5 x	6,0	8,0	30,0	30,0	37,0	4249658	20
M 25 x 1,5	5 x	6,5	8,0	30,0	30,0	37,0	4249659	20
M 25 x 1,5	6 x	4,0	8,0	30,0	30,0	37,0	4249660	20
M 25 x 1,5	6 x	5,0	8,0	30,0	30,0	37,0	4249661	20
M 25 x 1,5	8 x	4,0	8,0	30,0	30,0	37,0	4249662	20
M 25 x 1,5	8 x	5,0	8,0	30,0	30,0	37,0	4249663	20
M 25 x 1,5	21 x	2,0	8,0	30,0	30,0	37,0	4249664	20
M 32 x 1,5	2 x	4,5	8,5	30,0	33,0	38,0	4249670	20
M 32 x 1,5	2 x	8,0	8,5	30,0	33,0	38,0	4249671	20
M 32 x 1,5	2 x	9,0	8,5	40,0	40,0	45,0	4249672	20
M 32 x 1,5	2 x	11,0	8,5	40,0	40,0	45,0	4249673	20
M 32 x 1,5	2 x	12,0	8,5	40,0	40,0	45,0	4249674	20
M 32 x 1,5	3 x	7,0	8,5	30,0	33,0	38,0	4249675	20
M 32 x 1,5	3 x	8,0	8,5	30,0	33,0	38,0	4249676	20
M 32 x 1,5	3 x	9,0	8,5	40,0	40,0	45,0	4249677	20
M 32 x 1,5	3 x	11,0	8,5	40,0	40,0	45,0	4249678	20
M 32 x 1,5	4 x	5,0	8,5	30,0	33,0	38,0	4249679	20
M 32 x 1,5	4 x	6,0	8,5	30,0	33,0	38,0	4249680	20
M 32 x 1,5	4 x	8,0	8,5	40,0	40,0	45,0	4249681	20
M 32 x 1,5	4 x	9,0	8,5	40,0	40,0	45,0	4249682	20
M 32 x 1,5	4 x	10,0	8,5	40,0	40,0	45,0	4249683	20
M 32 x 1,5	5 x	5,0	8,5	30,0	33,0	38,0	4249684	20
M 32 x 1,5	5 x	6,0	8,5	30,0	33,0	38,0	4249685	20
M 32 x 1,5	5 x	6,5	8,5	30,0	33,0	38,0	4249686	20
M 32 x 1,5	6 x	4,0	8,5	30,0	33,0	38,0	4249687	20
M 32 x 1,5	6 x	5,0	8,5	30,0	33,0	38,0	4249688	20
M 32 x 1,5	6 x	6,0	8,5	40,0	40,0	45,0	4249689	20
M 32 x 1,5	6 x	6,5	8,5	40,0	40,0	45,0	4249690	20
M 32 x 1,5	6 x	7,0	8,5	40,0	40,0	45,0	4249691	20
M 32 x 1,5	7 x	6,0	8,5	40,0	40,0	45,0	4249692	20
M 32 x 1,5	7 x	7,0	8,5	40,0	40,0	45,0	4249693	20
M 32 x 1,5	8 x	4,0	8,5	30,0	33,0	38,0	4249694	20
M 32 x 1,5	8 x	5,0	8,5	40,0	40,0	45,0	4249695	20
M 32 x 1,5	8 x	6,0	8,5	40,0	40,0	45,0	4249696	20
M 32 x 1,5	10 x	6,0	8,5	40,0	40,0	45,0	4249697	20
M 32 x 1,5	11 x	5,0	8,5	40,0	40,0	45,0	4249698	20
M 32 x 1,5	21 x	2,0	8,5	30,0	33,0	38,0	4249699	20
M 32 x 1,5	28 x	3,0	8,5	40,0	40,0	45,0	4249701	20

Uvodnica kabelska WADI-TEC

nehrđajući čelik 1.4404, INOX 316L
ECA-stezni prsten
PG-/metrički navoj, dugi

Cable gland WADI-TEC

stainless steel 1.4404, INOX 316L
ECA-Clamping-Ring
PG-/metric thread, long





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: nehrđajući čelik 1.4404, INOX 316L
- 2: brtva: santopren
- 4: brtva za vanjski navoj: nitril
- 5: ECA-stezni prsten: PG 7-29: polikarbonat (PC) PG 36-48: ∗ polioksimetilen (POM)

Radna temperatura:
PC: -25°C do 120°C
∗POM: -30°C do 95°C

Boje/izvedbe:
- vanjski navoj: PG/metrički
- dugi navoj
- ECA-stezni prsten

Svojstva:
- otpornost na kiseline i lužine
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- može se kombinirati s raznim brtvenim umecima

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija automatizacije
- vjetroelektrane
- prehrambena industrija
- Offshore uređaji

Material:
- 1/3: Gland element/Cap nut: Stainless steel 1.4404, INOX 316L
- 2: Sealing: Santoprene
- 4: Sealing for External thread: Nitrile
- 5: ECA-Clamping-Ring PG 7-29: Polycarbonate (PC) PG 36-48: ∗ Polyoxymethylene (POM)

Temperature range:
PC: -25°C to 120°C
∗POM: -30°C to 95°C

Colour(s)/Designs:
- External thread: PG/metric
- long thread
- ECA-Clamping-Ring

Characteristics:
- acid and lye resistant
- gas and water-tight
- completely twist protected
- combinable with various sealing inserts


Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Automation technology
- Wind power station
- Food Industries
- Off-Shore apparatus

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla nehrđajući čelik Art. no. stainless steel	JP kom. PU pcs.
PG / PG							
PG 7	3,0 - 6,0	15,0	14,0	14,0	34,0	4222075	20
PG 9	5,0 - 8,0	15,0	17,0	17,0	34,0	4222091	20
PG 11	6,0 - 10,0	15,0	20,0	20,0	35,0	4222113	20
Pg 13,5	8,0 - 12,0	15,0	22,0	22,0	36,5	4222130	10
PG 16	9,5 - 14,0	15,0	24,0	24,0	38,5	4222164	10
PG 21	11,5 - 18,0	15,0	30,0	30,0	43,0	4222210	5
PG 29	15,0 - 24,0	15,0	40,0	40,0	50,0	4222296	5
PG 36∗	23,0 - 30,0	18,0	50,0	50,0	59,0	4222369	5
PG 42∗	26,0 - 35,0	18,0	58,0	58,0	65,0	4222423	1
PG 48∗	35,0 - 40,0	18,0	64,0	64,0	67,0	4222482	1
metrički / metric							
M 12 x 1,5	3,0 - 6,0	13,0	14,0	14,0	33,0	4222012	20
M 16 x 1,5/7	3,0 - 6,0	13,0	14,0	17,0	33,0	4222016	20
M 16 x 1,5/9	5,0 - 8,0	13,0	17,0	18,0	33,0	4222017	20
M 20 x 1,5/11	6,0 - 10,0	13,0	20,0	22,0	34,0	4222020	10
M 20 x 1,5/13	8,0 - 12,0	13,0	22,0	22,0	35,0	4222021	10
M 25 x 1,5/16	9,5 - 14,0	14,0	24,0	27,0	37,0	4222025	5
M 25 x 1,5/21	11,5 - 18,0	14,0	30,0	30,0	43,0	4222026	5
M 32 x 1,5/21	11,5 - 18,0	14,5	30,0	34,0	44,0	4222034	1
M 32 x 1,5/29	15,0 - 24,0	14,5	40,0	40,0	51,0	4222033	1
M 40 x 1,5	15,0 - 24,0	14,5	40,0	42,0	51,0	4222041	1
M 50 x 1,5∗	23,0 - 30,0	15,5	50,0	55,0	57,0	4222050	1
M 63 x 1,5∗	26,0 - 35,0	16,5	58,0	70,0	64,0	4222063	1

Uvodnica kabelska XXL
mesing niklani
metrički navoj

Cable gland XXL
nickel-plated brass
metric thread





RoHS | IP 68 10 bar

Materijal:
- tijelo kabelske uvodnice: mesing niklani
- brtva: TPE-V
- O-brtva: NBR/EPDM

Radna temperatura:
-40°C do 135°C

Boje/izvedbe:
- vanjski navoj: metrički

Svojstva:
- nepropusnost za vodu i ulje

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- energetska postrojenja
- pogonska tehnologija

Material:
- Gland element: nickel-plated brass
- Sealing: TPE-V
- O-ring: NBR/EPDM

Temperture range:
-40°C to 135°C

Colour(s)/Designs:
- External thread: metric

Characteristics:
- oil and water-tight


Accessories (see chapter…):
- lock nuts (3.3)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Power engineering
- Drive technology

vanjski navoj External thread	za kabel (d2) Ø mm for cable (d2) Ø mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 105 x 2,0	84,0 - 90,0	20,0	120,0	85,0	4651725	1
M 105 x 2,0	89,0 - 95,0	20,0	120,0	85,0	4651726	1
M 110 x 2,0	84,0 - 90,0	22,0	120,0	87,0	4651727	1
M 110 x 2,0	89,0 - 95,0	22,0	120,0	87,0	4651728	1

Uvodnica kabelska MAXXL
mesing niklani
metrički navoj

Cable gland MAXXL
nickel-plated brass
metric thread





RoHS | IP 68

Materijal:
- 1/2/3: glava uvodnice/brtveni prsten/ tijelo uvodnice: mesing niklani
- 4: brtva: neopren
- 5: O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički

Material:
- 1/2/3: cap nut/slide ring/ gland element: nickel-plated brass
- 4: sealing: neoprene
- 5: o-ring: nitrile

Temperture range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric


vanjski navoj External thread	za kabel promjera mm Clamping range mm	C mm C mm	duljina navoja (E) mm Thread length (E) mm	SW (H1/H2) mm SW (H1/H2) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	4,0 - 8,0	8,0	7,0	17/17	33,0	4201200	1
M 16 x 1,5	7,0 - 12,0	12,0	7,0	20/20	30,0	4201201	1
M 20 x 1,5	9,0 - 16,0	16,2	7,0	24/24	34,0	4201202	1
M 25 x 1,5	9,0 - 16,0	16,2	8,0	24/30	35,0	4201203	1
M 25 x 1,5	13,0 - 20,5	20,5	8,0	30/30	36,0	4201204	1
M 32 x 1,5	13,0 - 21,0	21,4	8,5	30/36	36,5	4201205	1
M 32 x 1,5	16,0 - 27,0	27,5	8,5	40/40	53,5	4201206	1
M 40 x 1,5	21,0 - 34,0	34,3	8,5	48/48	59,5	4201207	1
M 50 x 1,5	28,0 - 41,0	41,5	9,5	55/55	65,5	4201208	1
M 63 x 1,5	34,0 - 47,5	48,0	10,5	64/68	76,5	4201209	1
M 63 x 1,5	39,0 - 54,0	54,9	10,5	70/70	78,5	4201210	1
M 75 x 1,5	48,0 - 65,0	66,0	11,5	85/85	93,5	4201211	1
M 80 x 2,0	55,0 - 74,0	74,0	12,0	95/95	104,0	4201212	1
M 90 x 2,0	65,0 - 83,0	83,0	12,0	110/110	113,0	4201213	1
M 100 x 2,0	74,0 - 93,0	93,0	12,0	120/120	113,0	4201214	1

Uvodnica kabelska WADI-A

mesing niklani
PG-navoj, kratki

Cable gland WADI-A

nickel-plated brass
PG-thread, short





RoHS | IP 68

Materijal:
- tijelo kabelske uvodnice: mesing niklani
- brtva: elastomer
- brtveni prsten za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- *) brtva 2-djelna

Svojstva:
- nepropusnost za vodu i plinove
- otpornost na izvlačenje, istezanje i pritisak
- brtva otporna na: ulje, morsku vodu i starenje

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- Gland element: nickel-plated brass
- Sealing: Elastomeric
- Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: PG
- short thread
- *) two-part-sealing

Characteristics:
- gas and water-tight
- pull, tensile and compression strength
- sealing resistant against: oil, ageing, sea water

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG 7	507/3	2,0 - 3,0	6,0	14,0	14,0	22,0	4200055	100
PG 7	507/7	4,0 - 7,0	6,0	14,0	14,0	22,0	4200056	50
PG 7	507	4,0 - 6,5	6,0	14,0	14,0	22,0	4200071	100
PG 9	509/7	5,0 - 7,0	6,5	17,0	17,0	24,0	4200101	50
PG 9	509/10	7,0 - 10,0	6,5	17,0	17,0	24,0	4200102	50
PG 9	509/8	6,0 - 8,0	6,5	17,0	17,0	24,0	4200080	50
PG 9	509	7,0 - 10,0	6,5	17,0	17,0	24,0	4200098	50
PG 11	511/7	5,0 - 7,0	6,0	17,0	20,0	20,0	4200128	50
PG 11	511/10	6,5 - 10,5	6,5	24,0	24,0	20,0	4200143	50
PG 11	511/8	6,0 - 8,0	6,0	17,0	20,0	20,0	4200500	50
PG 11	511	7,0 - 10,0	6,0	17,0	20,0	20,0	4200110	50
PG 11	511/12*)	5,0 - 12,0	6,0	20,0	20,0	20,0	4200144	50
PG 11	511/15*)	7,0 - 15,0	6,5	24,0	24,0	20,0	4200152	50
PG 13,5	513/10	6,5 - 10,5	6,5	24,0	24,0	28,0	4200178	50
PG 13,5	513/12	8,0 - 12,0	6,5	24,0	24,0	28,0	4200179	50
PG 13,5	513*)	7,0 - 15,0	6,5	24,0	24,0	28,0	4200136	50
PG 13,5	513/15	10,0 - 15,0	6,5	24,0	24,0	28,0	4200537	100
PG 16	516/10	6,5 - 10,5	6,5	24,0	24,0	28,0	4200186	50
PG 16	516/12	8,0 - 12,0	6,5	24,0	24,0	28,0	4200187	25
PG 16	516*)	7,0 - 15,0	6,5	24,0	24,0	28,0	4200160	25
PG 21	521*)	12,0 - 20,5	7,5	32,0	32,0	32,0	4200217	25
PG 21	521/21	16,0 - 20,5	7,5	32,0	32,0	32,0	4200195	25
PG 21	521/22	17,0 - 21,5	7,5	32,0	32,0	32,0	4200196	20
PG 29	529*)	16,0 - 26,0	8,0	38,0	38,0	38,0	4200292	10
PG 36	536	24,0 - 35,0	9,0	50,0	50,0	37,0	4200365	10
PG 42	542	35,0 - 45,0	10,0	58,0	58,0	41,0	4200420	5
PG 48	548	38,0 - 49,0	11,0	64,0	64,0	44,0	4200489	5

Uvodnica kabelska WADI-A

mesing niklani
metrički navoj, kratki

Cable gland WADI-A

nickel-plated brass
metric thread, short





RoHS | IP 68 | EN 50262

Materijal:
- tijelo kabelske uvodnice: mesing niklani
- brtva: elastomer
- brtveni prsten za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- *) brtva 2-djelna

Svojstva:
- nepropusnost za vodu i plinove
- otpornost na izvlačenje, istezanje i pritisak
- brtva otporna na: ulje, morsku vodu i starenje

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- Gland element: nickel-plated brass
- Sealing: Elastomeric
- Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: metric
- short thread
- *) two-part-sealing

Characteristics:
- gas and water-tight
- pull, tensile and compression strength
- sealing resistant against: oil, ageing, sea water

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	M1203	2,0 - 3,0	7,0	14,0	14,0	23,0	4200750	50
M 12 x 1,5	M1200	4,0 - 6,5	7,0	14,0	14,0	23,0	4200751	50
M 12 x 1,5	M1207	4,0 - 7,0	7,0	14,0	14,0	23,0	4200752	50
M 16 x 1,5	M1607	5,0 - 7,0	7,0	17,0	17,0	25,0	4200760	50
M 16 x 1,5	M1608	6,0 - 8,0	7,0	17,0	17,0	25,0	4200761	50
M 16 x 1,5	M1600	7,0 - 10,0	7,0	17,0	17,0	25,0	4200762	50
M 16 x 1,5	M1610	7,0 - 10,0	7,0	17,0	17,0	25,0	4200763	50
M 16 x 1,5	M1612*)	5,0 - 12,0	7,0	20,0	20,0	25,0	4200764	50
M 20 x 1,5	M2010	6,5 - 10,5	7,0	24,0	24,0	29,0	4200770	50
M 20 x 1,5	M2015	10,0 - 15,0	7,0	24,0	24,0	29,0	4200771	50
M 20 x 1,5	M2000*)	7,0 - 15,0	7,0	24,0	24,0	29,0	4200772	50
M 25 x 1,5	M2510	6,5 - 10,5	8,0	24,0	27,0	29,0	4200773	20
M 25 x 1,5	M2500*)	7,0 - 15,0	8,0	24,0	27,0	29,0	4200780	20
M 25 x 1,5	M2521*)	12,0 - 20,5	8,0	32,0	32,0	33,0	4200781	20
M 25 x 1,5	M2520	16,0 - 20,5	8,0	32,0	32,0	33,0	4200782	20
M 32 x 1,5	M3232*)	16,0 - 26,0	8,5	38,0	38,0	39,0	4200790	20
M 40 x 1,5	M4040*)	24,0 - 35,0	8,5	50,0	50,0	36,0	4200794	20
M 50 x 1,5	M5050*)	35,0 - 45,0	9,5	58,0	58,0	40,0	4200795	10
M 63 x 1,5	M6363*)	38,0 - 49,0	10,5	64,0	64,0	43,0	4200796	5


Uvodnica kabelska WADI-A

mesing niklani
metrički navoj, dugi

Cable gland WADI-A

nickel-plated brass
metric thread, long

RoHS | IP 68 | EN 50262





Materijal:
- tijelo kabelske uvodnice: mesing niklani
- brtva: elastomer
- brtveni prsten za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: metrički
- dugi navoj
- *) brtva 2-djelna

Svojstva:
- nepropusnost za vodu i plinove
- otpornost na izvlačenje, istezanje i pritisak
- brtva otporna na: ulje, morsku vodu i starenje

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- Gland element: nickel-plated brass
- Sealing: Elastomeric
- Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: metric
- long thread
- *) two-part-sealing

Characteristics:
- gas and water-tight
- pull, tensile and compression strength
- sealing resistant against: oil, ageing, sea water

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	MLG1203	2,0 - 3,0	13,0	14,0	14,0	29,0	4200800	50
M 12 x 1,5	MLG1200	4,0 - 6,5	13,0	14,0	14,0	29,0	4200801	50
M 12 x 1,5	MLG1207	4,0 - 7,0	13,0	14,0	14,0	29,0	4200802	50
M 16 x 1,5	MLG1607	5,0 - 7,0	13,0	17,0	17,0	31,0	4200810	50
M 16 x 1,5	MLG1608	6,0 - 8,0	13,0	17,0	17,0	31,0	4200811	50
M 16 x 1,5	MLG1600	7,0 - 10,0	13,0	17,0	17,0	31,0	4200812	50
M 16 x 1,5	MLG1610	7,0 - 10,0	13,0	17,0	17,0	31,0	4200813	50
M 16 x 1,5	MLG1612*)	5,0 - 12,0	13,0	20,0	20,0	31,0	4200814	50
M 20 x 1,5	MLG2010	6,5 - 10,5	14,0	24,0	24,0	35,0	4200820	50
M 20 x 1,5	MLG2015	10,0 - 15,0	14,0	24,0	24,0	35,0	4200821	50
M 20 x 1,5	MLG2000*)	7,0 - 15,0	14,0	24,0	24,0	35,0	4200822	50
M 25 x 1,5	MLG2510	6,5 - 10,5	14,0	24,0	27,0	35,0	4200830	20
M 25 x 1,5	MLG2500*)	7,0 - 15,0	14,0	24,0	27,0	35,0	4200831	20
M 25 x 1,5	MLG2521*)	12,0 - 20,5	14,0	32,0	32,0	39,0	4200832	20
M 25 x 1,5	MLG2520	16,0 - 20,5	14,0	32,0	32,0	39,0	4200833	20
M 32 x 1,5	MLG3232*)	16,0 - 26,0	14,5	38,0	38,0	45,0	4200835	20
M 40 x 1,5	MLG4040*)	24,0 - 35,0	14,5	50,0	50,0	42,0	4200836	20
M 50 x 1,5	MLG5050*)	35,0 - 45,0	15,5	58,0	58,0	46,0	4200837	10
M 63 x 1,5	MLG6363*)	38,0 - 49,0	16,5	64,0	64,0	49,0	4200840	5

Uvodnica kabelska tip ZEV

mesing niklani sa zaštitom od izvlačenja kabela

Cable gland Type ZEV

nickel-plated brass with strain relief





RoHS | IP 55 | EN 50262

Materijal:
- tijelo kabelske uvodnice: mesing niklani

Radna temperatura:
-40°C do 60°C

Boje/izvedbe:
- vanjski navoj: PG/metrički
- zatvorena brtva

Svojstva:
- visoka zaštita od izvlačenja kablova
- robustna
- za kablove i vodiče sa velikim vanjskim promjerom
- IP 65 moguć sa ravnom brtvom

Pribor (vidi poglavlje…):
- Matice (3.3)
- Ravne brtve (3.3)

Upotreba:
- montaža armiranih vodiča prema VDE
- kompaktna kabelska uvodnica od mesinga za pouzdanu zaštitu od izvlačenja kablova, čvrsta, za kablove velikih promjera

Material:
- Gland element: nickel-plated brass

Temperature range:
-40°C to 60°C

Colour(s)/Designs:
- External thread: PG/metric
- Sealing ring, punchable

Characteristics:
- high strain relief
- robust
- for cables with large external diameters
- IP 65 possible with flat sealing

Accessories (see chapter…):
- lock nuts (3.3)
- flat sealing (3.3)

Applications:
- Mounting of armoured leads according to VDE
- Compact brass cable gland for reliable strain relief, solid, for large cable diameters

vanjski navoj External thread	Tip Type	brtva za kabel promjera mm Clamping range Sealing mm	zaštita od izvlačenja za kabel promjera mm Clamping range strain relief mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG / PG								
PG 7	ZEV 607	4,0 - 6,0	6,0 - 9,0	5,0	14,0	17,0	4300009	100
PG 9	ZEV 609	3,5 - 9,0	4,0 - 9,0	6,0	17,0	17,0	4300017	50
PG 11	ZEV 710	3,5 - 11,0	7,0 - 11,0	6,0	20,0	20,0	4300025	50
PG 13,5	ZEV 1014	5,5 - 13,0	10,0 - 13,0	6,5	22,0	22,0	4300033	50
PG 16	ZEV 1015	6,5 - 15,0	10,0 - 15,0	6,5	24,0	24,0	4300041	50
PG 21	ZEV 1418	8,0 - 20,0	13,0 - 20,0	7,0	30,0	30,0	4300050	50
PG 29	ZEV 2027	12,5 - 29,0	20,0 - 29,0	8,0	40,0	40,0	4300068	10
metrički / metric								
M 16 x 1,5	ZEV M 16/9	3,5 - 9,0	4,0 - 9,0	7,0	18,0	17,0	4300116	50
M 20 x 1,5/11	ZEV M 20/11	3,5 - 11,0	7,0 - 11,0	7,0	22,0	20,0	4300120	50
M 20 x 1,5/13,5	ZEV M 20/13,5	5,5 - 13,0	10,0 - 13,0	7,0	22,0	22,0	4300121	50
M 25 x 1,5/16	ZEV M 25/16	6,5 - 15,0	10,0 - 15,0	8,0	27,0	24,0	4300125	50
M 25 x 1,5/21	ZEV M 25/21	8,0 - 20,0	13,0 - 20,0	8,0	32,0	30,0	4300126	50
M 32 x 1,5/21	ZEV M 32/21	8,0 - 20,0	13,0 - 20,0	8,5	34,0	30,0	4300132	50
M 32 x 1,5/29	ZEV M 32/29	12,5 - 29,0	20,0 - 29,0	8,5	40,0	40,0	4300133	10


Uvodnica kabelska tip ZEVB

mesing niklani sa zaštitom od izvlačenja i izvijanja kabela

Cable gland Type ZEVB

nickel-plated brass with strain relief and kink protection

RoHS | IP 55 | EN 50262





Materijal:
- tijelo kabelske uvodnice: mesing niklani

radna temperatura:
-40°C do 60°C

Boje/izvedbe:
- vanjski navoj: PG/metrički
- zatvorena brtva

Svojstva:
- zaštita od istezanja kabela
- mogućnost spajanja na uzemljenje
- zaštita kablova pri jakom savijanju
- IP 65 moguć sa ravnom brtvom

Pribor (vidi poglavlje…):
- Matice (3.3)
- Ravne brtve (3.3)

Upotreba:
- pokretni dijelovi strojeva
- izrada uređaja

Material:
- Gland element: nickel-plated brass

Temperature range:
-40°C to 60°C

Colour(s)/Designs:
- External thread: PG/metric
- Sealing ring, punchable

Characteristics:
- tension proof grip
- grounding connection possible
- protects strongly bent cables
- IP 65 possible with flat sealing

Accessories (see chapter…):
- lock nuts (3.3)
- flat sealing (3.3)

Applications:
- Mobile machine parts
- Apparatus construction


vanjski navoj External thread	Tip Type	brtva za kabel promjera mm Clamping range Sealing mm	zaštita od izvlačenja za kabel promjera mm Clamping range strain relief mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG / PG								
PG 9	ZEVB 9	2,0 - 9,0	6,0 - 9,5	6,0	17,0	22,0	4308093	50
PG 11	ZEVB 11	4,0 - 11,0	8,0 - 11,5	6,0	20,0	24,0	4308115	50
PG 13,5	ZEVB 13	4,5 - 12,0	9,0 - 13,0	6,5	22,0	28,0	4308131	50
PG 16	ZEVB 16	5,5 - 14,5	10,0 - 15,0	6,5	24,0	30,0	4308166	25
PG 21	ZEVB 21	8,0 - 19,0	14,0 - 20,0	7,0	30,0	38,0	4308212	25
PG 29	ZEVB 29	12,0 - 27,0	19,0 - 30,0	8,0	40,0	50,0	4308298	10
metrički / metric								
M 16 x 1,5	ZEVB M 16/9	2,0 - 9,0	6,0 - 9,5	7,0	18,0	22,0	4308516	100
M 20 x 1,5	ZEVB M 20/11	4,0 - 11,0	8,0 - 11,5	7,0	22,0	24,0	4308520	100
M 20 x 1,5	ZEVB M 20/13	4,5 - 12,0	9,0 - 13,0	7,0	22,0	28,0	4308521	100
M 25 x 1,5	ZEVB M 25/16	5,5 - 14,5	10,0 - 15,0	8,0	27,0	30,0	4308525	50
M 25 x 1,5	ZEVB M 25/21	8,0 - 18,0	14,0 - 20,0	8,0	32,0	38,0	4308526	25
M 32 x 1,5	ZEVB M 32/21	8,0 - 19,0	14,0 - 20,0	8,5	34,0	38,0	4308532	25
M 32 x 1,5	ZEVB M 32/29	12,0 - 27,0	19,0 - 30,0	8,5	40,0	50,0	4308533	25

Uvodnica kabelska tip ZA

mesing niklani sa centriranom zaštitom od izvlačenja i izvijanja kabela

Cable gland Type ZA

nickel-plated brass with centred strain relief and kink protection





RoHS | IP 55 | EN 50262

Materijal:
- tijelo kabelske uvodnice: mesing niklani
- metrički brtveni prsten: neopren PG-brtveni prsten: guma

Radna temperatura
PG: -40°C do 60°C
metrički: -25°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG/metrički
- zatvorena brtva

Svojstva:
- centrirana zaštita od izvlačenja kabela
- bez izvijanja kabela prilikom učvršćenja zaštita od istezanja kabela
- mogućnost spajanja na uzemljenje
- IP 65 moguć sa ravnom brtvom

Pribor (vidi poglavlje…):
- Matice (3.3)
- Ravne brtve (3.3)

Upotreba:
- dvostruka zaštita od izvlačenja kabela za teške uvjete rada
- građevinarstvo
- izrada uređaja
- proizvodnja pogonskih agregata
- Motorenbau

Material:
- Gland element: nickel-plated brass
- Metric-Sealing: Neoprene PG-Sealing: Rubber

Temperature range:
PG: -40°C to 60°C
Metric: -25°C to 100°C

Colour(s)/Designs:
- External thread: PG/metric
- Sealing ring, punchable

Characteristics:
- centred strain relief
- no twisted cable while clamping
- tension proof grip
- grounding connection possible
- IP 65 possible with flat sealing

Accessories (see chapter…):
- lock nuts (3.3)
- flat sealing (3.3)

Applications:
- Saddle clamp strain relief gland for raw applications
- Building sites
- Apparatus construction
- Drives

vanjski navoj External thread	Tip Type	brtva za kabel promjera mm Clamping range Sealing mm	zaštita od izvlačenja za kabel promjera mm Clamping range strain relief mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG / PG								
PG 7	ZA 7	4,0 - 6,0	5,5 - 7,5	5,0	14,0	16,0	4305078	100
PG 9	ZA 9	2,0 - 9,0	6,5 - 9,5	6,0	17,0	19,0	4305094	50
PG 11	ZA 11	4,0 - 11,0	7,5 - 11,5	6,0	20,0	22,0	4305116	50
PG 13,5	ZA 13	4,5 - 12,0	8,5 - 13,5	6,5	22,0	24,0	4305132	50
PG 16	ZA 16	5,5 - 14,5	10,5 - 16,5	6,5	24,0	27,0	4305167	25
PG 21	ZA 21	8,0 - 19,0	12,0 - 20,5	7,0	30,0	33,0	4305213	25
PG 29	ZA 29	12,0 - 27,0	19,0 - 29,5	8,0	40,0	42,0	4305299	10
PG 36	ZA 36	22,0 - 33,0	24,0 - 36,5	9,0	50,0	52,0	4305361	10
PG 42	ZA 42	25,0 - 40,0	33,0 - 42,5	10,0	57,0	60,0	4305426	5
PG 48	ZA 48	30,0 - 45,0	38,0 - 47,5	10,0	64,0	64,0	4305485	5
metrički / metric								
M 12 x 1,5	ZA/M 12	4,0 - 6,0	5,5 - 7,5	7,0	14,0	16,0	4305500	50
M 16 x 1,5	ZA/M 16/02	2,0 - 9,0	6,5 - 9,5	7,0	18,0	19,0	4305501	50
M 16 x 1,5	ZA/M 16/04	4,0 - 11,0	7,5 - 11,5	7,0	20,0	22,0	4305502	50
M 16 x 1,5	ZA/M 16/4,5	4,5 - 12,0	8,5 - 13,5	7,0	22,0	24,0	4305503	50
M 20 x 1,5	ZA/M 20/04	4,0 - 11,0	7,5 - 11,5	7,0	22,0	22,0	4305504	50
M 20 x 1,5	ZA/M 20/4,5	4,5 - 12,0	8,5 - 13,5	7,0	22,0	24,0	4305505	50
M 20 x 1,5	ZA/M 20/5,5	5,5 - 14,5	10,5 - 16,5	7,0	24,0	27,0	4305506	50
M 25 x 1,5	ZA/M 25	5,5 - 14,5	10,5 - 16,5	8,0	27,0	27,0	4305507	20
M 32 x 1,5	ZA/M 32/08	8,0 - 19,0	12,0 - 20,5	8,5	34,0	33,0	4305508	20
M 32 x 1,5	ZA/M 32/12	12,0 - 27,0	19,0 - 29,5	8,5	40,0	42,0	4305509	20
M 40 x 1,5	ZA/M 40	12,0 - 27,0	19,0 - 29,5	8,5	42,0	42,0	4305510	20
M 50 x 1,5	ZA/M 50/22	22,0 - 33,0	24,0 - 36,5	9,5	52,0	52,0	4305511	10
M 50 x 1,5	ZA/M 50/25	25,0 - 40,0	33,0 - 42,5	9,5	58,0	60,0	4305512	10
M 63 x 1,5	ZA/M 63/25	25,0 - 40,0	33,0 - 42,5	10,5	65,0	60,0	4305513	5
M 63 x 1,5	ZA/M 63/30	30,0 - 45,0	36,0 - 47,5	10,5	65,0	64,0	4305514	5
M 75 x 1,5	ZA/M 75	30,0 - 45,0	36,0 - 47,5	11,5	80,0	64,0	4305515	1

Uvodnica kabelska tip SR

mesing niklani
sa zaštitom od izvlačenja kabela i nastavkom protiv izvijanja
PG-navoj

RoHS | IP 65

3.1

Materijal:
- tijelo kabelske uvodnice: mesing niklani
- nastavak protiv savijanja: neopren
- brtva za vanjski navoj: nitril

Boje/izvedbe:
- vanjski navoj: PG
- sa spojnicom protiv izvlačenja kabela


Svojstva:
- zaštita od izvijanja i kidanja kabela

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- pokretni dijelovi strojeva
- pokretne trake i transportni sustavi
- proizvodne linije
- tehnologija mjernih i kontrolnih instrumenata

Cable gland Type SR

nickel-plated brass with strain relief and kink protection socket PG-thread





Material:
- Gland element: nickel-plated brass
- Kink protection socket: Neoprene
- Sealing for External thread: Nitrile

Colour(s)/Designs:
- External thread: PG
- with strain relief clamp

Characteristics:
- protection against kinking and tearing out of cables

Accessories (see chapter…):
- lock nuts (3.3)

Applications:
- Mobile machine parts
- Conveying and transport systems
- Production lines
- Measurement and control technology

vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	Ø P mm Ø P mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG 7	SR 7005	3,5 - 5,0	5,0	5,0	14,0	17,0	49,0	4309014	100
PG 9	SR 9007	5,5 - 7,0	6,0	7,0	17,0	17,0	52,0	4309022	100
PG 11	SR 1107	5,5 - 7,0	6,0	7,0	20,0	20,0	53,5	4309030	100
PG 11	SR 1109	7,5 - 9,0	6,0	9,0	20,0	20,0	53,5	4309049	50
PG 13,5	SR 1309	7,5 - 9,0	6,5	9,0	22,0	22,0	60,0	4309057	50
PG 13,5	SR 1311	9,0 - 11,0	6,5	11,0	22,0	22,0	60,0	4309065	50
PG 13,5	SR 1313	10,0 - 12,0	6,5	13,0	22,0	22,0	60,0	4309073	50
PG 16	SR 1613	11,0 - 12,0	6,5	13,0	24,0	24,0	64,0	4309081	50
PG 16	SR 1615	12,0 - 13,5	6,5	15,0	24,0	24,0	64,0	4309090	50
PG 21	SR 2115	13,0 - 14,0	7,0	15,0	30,0	30,0	77,0	4309103	25
PG 21	SR 2117	15,0 - 16,0	7,0	17,0	30,0	30,0	77,0	4309111	25
PG 21	SR 2119	17,0 - 18,0	7,0	19,0	30,0	30,0	77,0	4309120	25
PG 21	SR 2120	17,0 - 19,0	7,0	20,0	30,0	30,0	77,0	4309138	25
PG 29	SR 2920	17,5 - 20,0	8,0	20,0	40,0	40,0	82,0	4309146	25
PG 29	SR 2923	20,0 - 23,0	8,0	23,0	40,0	40,0	82,0	4309154	25
PG 29	SR 2925	22,0 - 25,0	8,0	25,0	40,0	40,0	82,0	4309162	25
PG 36	SR 3626	23,5 - 26,0	9,0	26,0	50,0	50,0	110,0	4309170	10
PG 36	SR 3630	27,0 - 30,0	9,0	30,0	50,0	50,0	110,0	4309189	5
PG 36	SR 3633	30,0 - 33,0	9,0	33,0	50,0	50,0	110,0	4309197	10
PG 36	SR 3635	31,0 - 35,0	9,0	35,0	50,0	50,0	110,0	4309200	10
PG 42	SR 4235	32,0 - 35,0	10,0	35,0	57,0	57,0	112,0	4309219	10
PG 42	SR 4238	34,0 - 38,0	10,0	38,0	57,0	57,0	112,0	4309227	10
PG 42	SR 4240	36,0 - 40,0	10,0	40,0	57,0	57,0	112,0	4309235	10
PG 48	SR 4840	36,0 - 40,0	10,0	40,0	64,0	64,0	118,0	4309243	10
PG 48	SR 4844	39,0 - 44,0	10,0	44,0	64,0	64,0	118,0	4309251	10


Uvodnica kabelska tip SR

mesing niklani
sa zaštitom od izvlačenja kabela i nastavkom protiv izvijanja
metrički navoj

RoHS | IP 65 | EN 50262

Cable gland Type SR

nickel-plated brass
with strain relief and kink protection socket
metric thread





Materijal:
- tijelo kabelske uvodnice: mesing niklani
- nastavak protiv savijanja: neopren
- brtva za vanjski navoj: nitril

Boje/izvedbe:
- vanjski navoj: metrički
- sa spojnicom protiv izvlačenja kabela

Svojstva:
- zaštita od izvijanja i kidanja kabela
- vodonepropusno

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- pokretni dijelovi strojeva
- pokretne trake i transportni sustavi
- proizvodne linije
- tehnologija mjernih i kontrolnih instrumenata

Material:
- Gland element: nickel-plated brass
- Kink protection socket: Neoprene
- Sealing for External thread: Nitrile

Colour(s)/Designs:
- External thread: Metric
- with strain relief clamp

Characteristics:
- protection against kinking and tearing out of cables
- watertight

Accessories (see chapter…):
- lock nuts (3.3)

Applications:
- Mobile machine parts
- Conveying and transport systems
- Production lines
- Measurement and control technology

vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	Ø P mm Ø P mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	SRM 1205	3,5 - 5,0	7,0	5,0	14,0	17,0	51,0	4309300	100
M 16 x 1,5	SRM 1607	5,5 - 7,0	7,0	7,0	17,0	17,0	53,0	4309305	100
M 20 x 1,5	SRM 2007	5,5 - 7,0	7,0	7,0	22,0	20,0	54,5	4309310	100
M 20 x 1,5	SRM 2009	7,5 - 9,0	7,0	9,0	22,0	20,0	54,5	4309311	50
M 20 x 1,5	SRM 2011	9,0 - 11,0	7,0	11,0	22,0	22,0	61,0	4309312	50
M 20 x 1,5	SRM 2013	10,0 - 12,0	7,0	13,0	22,0	22,0	61,0	4309313	50
M 25 x 1,5	SRM 2513	11,0 - 12,0	8,0	13,0	26,0	24,0	65,5	4309315	50
M 25 x 1,5	SRM 2515	12,0 - 13,5	8,0	15,0	26,0	24,0	65,5	4309316	50
M 32 x 1,5	SRM 3215	13,0 - 14,0	8,5	15,0	34,0	30,0	78,5	4309320	25
M 32 x 1,5	SRM 3217	15,0 - 16,0	8,5	17,0	34,0	30,0	78,5	4309321	25
M 32 x 1,5	SRM 3219	17,0 - 18,0	8,5	19,0	34,0	30,0	78,5	4309322	25
M 32 x 1,5	SRM 3220	17,0 - 19,0	8,5	20,0	34,0	30,0	78,5	4309323	25
M 40 x 1,5	SRM 4020	17,5 - 20,0	8,5	20,0	42,0	40,0	82,0	4309325	25
M 40 x 1,5	SRM 4023	20,0 - 23,0	8,5	23,0	42,0	40,0	82,0	4309326	25
M 40 x 1,5	SRM 4025	22,0 - 25,0	8,5	25,0	42,0	40,0	82,0	4309327	25
M 50 x 1,5	SRM 5026	23,5 - 26,0	9,5	26,0	52,0	50,0	110,0	4309330	10
M 50 x 1,5	SRM 5030	27,0 - 30,0	9,5	30,0	52,0	50,0	110,0	4309331	10
M 50 x 1,5	SRM 5033	30,0 - 33,0	9,5	33,0	52,0	50,0	110,0	4309332	10
M 50 x 1,5	SRM 5035	31,0 - 35,0	9,5	35,0	52,0	50,0	110,0	4309333	10
M 63 x 1,5	SRM 6335	32,0 - 35,0	10,5	35,0	64,0	57,0	112,0	4309335	5
M 63 x 1,5	SRM 6338	34,0 - 38,0	10,5	38,0	64,0	57,0	112,0	4309336	5
M 63 x 1,5	SRM 6340	36,0 - 40,0	10,5	40,0	64,0	57,0	112,0	4309337	5


Uvodnica kabelska Syntec/KS


Poliamid
sa zaštitom od izvlačenja i nastavkom protiv izvijanja kabela

Cable gland Syntec/KS

Polyamide
with strain relief and kink protection

RoHS | IP 68 | cULus | PG | EN 50262





Materijal:
- tijelo kabelske uvodnice: poliamid 6
- brtva: neopren

Radna temperatura
-30°C do 100°C

Boje/izvedbe:
- srebrnosiva, crna
- vanjski navoj: PG/metrički/NPT
- kratki/dugi navoj

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- strojevi i uređaji

Material:
- Gland element: Polyamide 6
- Sealing: Neoprene

Temperature range:
-30°C to 100°C

Colour(s)/Designs:
- silver grey, jet black
- External thread: PG/metric/NPT
- short/long thread


Accessories (see chapter…):
- lock nuts (3.3)

Applications:
- Machines and devices

vanjski navoj (G) External thread (G)	tip Type	za kabel promjera (K) mm Clamping range (K) mm	E mm E mm	SW mm SW mm	H mm H mm	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG / PG								
PG 7	Syntec/KS	2,5 - 6,5	8,0	15,0	54,0	5306007	5306107	50
PG 9	Syntec/KS	3,0 - 8,0	8,0	19,0	64,0	5306009	5306109	50
PG 11/1	Syntec/KS	4,0 - 10,0	8,0	22,0	77,0	5306011	5306111	50
PG 11/2	Syntec/KS	2,0 - 7,0	8,0	22,0	77,0	5306012	5306112	50
PG 13/1	Syntec/KS	5,5 - 12,0	9,0	24,0	88,0	5306013	5306113	50
PG 13/2	Syntec/KS	3,0 - 7,0	9,0	24,0	88,0	5306014	5306114	50
PG 16/1	Syntec/KS	8,5 - 14,0	10,0	27,0	102,0	5306016	5306116	25
PG 16/2	Syntec/KS	5,0 - 11,0	10,0	27,0	102,0	5306017	5306117	25
metrički, kratki navoj / metric, short thread								
M 12 x 1,5/K/6,5	Syntec/KS	2,5 - 6,5	6,0	15,0	54,0	5306030	5306130	50
M 16 x 1,5/K/8	Syntec/KS	4,0 - 8,0	6,0	19,0	64,0	5306031	5306131	50
M 20 x 1,5/K/7	Syntec/KS	3,0 - 7,0	8,0	24,0	88,0	5306032	5306132	50
M 20 x 1,5/K/12	Syntec/KS	5,5 - 12,0	8,0	24,0	88,0	5306033	5306133	50
metrički, dugi navoj / metric, long thread								
M 12 x 1,5/L/6,5	Syntec/KS	2,5 - 6,5	12,0	15,0	54,0	5306040	5306140	50
M 16 x 1,5/L/8	Syntec/KS	4,0 - 8,0	12,0	19,0	64,0	5306041	5306141	50
M 20 x 1,5/L/7	Syntec/KS	3,0 - 7,0	13,0	24,0	88,0	5306042	5306142	50
M 20 x 1,5/L/12	Syntec/KS	5,5 - 12,0	13,0	24,0	88,0	5306043	5306143	50
NPT / NPT								
NPT 3/8"/8	Syntec/KS	3,0 - 8,0	15,0	19,0/22,0	64,0	5306050	5306150	50
NPT 1/2"/7	Syntec/KS	3,0 - 7,0	15,0	24,0	88,0	5306051	5306151	50
NPT 1/2"/12	Syntec/KS	5,5 - 12,0	15,0	24,0	88,0	5306052	5306152	50

Uvodnica kabelska konusna
polistiren
prema „starom“ DIN 46320
PG-navoj

Conus-Cable gland
Polystyrene
acc. to „old“ DIN 46320
PG-thread





RoHS | IP 54

Materijal:
• tijelo kabelske uvodnice: polistiren

Boje/izvedbe:
• svjetlosiva
• vanjski navoj: PG
• kratki/dugi navoj
• šesterokutna

Pribor (vidi poglavlje…):
• Matice (3.3)

Upotreba:
• za primjenu u području instalacija bez posebnih zahtjeva

Material:
• Gland element: Polystyrene

Colour(s)/Designs:
• light grey
• External thread: PG
• short/long thread
• with hexagon base


Accessories (see chapter…):
• lock nuts (3.3)

Applications:
• for application in installation sectors without special requirements

vanjski navoj External thread	tip Type	za kabel Ø mm for cable Ø mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	JP kom. PU pcs.
kratki navoj / short thread				
PG 7	307PG	3,5 - 6,0	5202078	50
PG 9	309PG	4,5 - 7,0	5202094	50
PG 11	311PG	6,0 - 9,0	5202116	50
PG 13,5	313PG	9,0 - 12,0	5202132	50
PG 16	316PG	11,0 - 14,0	5202167	50
PG 21	321PG	14,0 - 18,0	5202213	25
PG 29	329PG	18,0 - 25,0	5202299	10
PG 36	336PG	25,0 - 32,0	5202361	10
PG 42	342PG	30,0 - 38,0	5202434	10
PG 48	348PG	36,0 - 44,0	5202485	10
dugi navoj / long thread				
PG 9	309PGL	4,5 - 7,0	5202590	50
PG 11	311PGL	6,0 - 9,0	5202604	50
PG 13,5	313PGL	9,0 - 12,0	5202507	50
PG 16	316PGL	11,0 - 14,0	5202515	25
PG 21	321PGL	14,0 - 18,0	5202612	25
PG 29	329PGL	18,0 - 25,0	5202620	10
PG 36	336PGL	25,0 - 32,0	5202418	10
PG 42	342PGL	30,0 - 38,0	5202426	10

Uvodnica kabelska konusna
poliamid
metrički navoj

Conus-Cable gland
Polyamide
metric thread





RoHS | IP 54 | EN 50262

Materijal:
- tijelo kabelske uvodnice: poliamid

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: metrički
- šesterokutna
- * sa višeslojnom brtvom

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- za primjenu u području instalacija bez posebnih zahtjeva

Material:
- Gland element: Polyamide

Colour(s)/Designs:
- light grey
- External thread: metric
- with hexagon base
- * with punchable sealing ring


Accessories (see chapter…):
- lock nuts (3.3)


Applications:
- for application in installation sectors without special requirements

vanjski navoj External thread	za kabel (C) Ø mm for cable (C) Ø mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	JP kom. PU pcs.
M 12 x 1,5/PG 9	6,0 - 8,0	5203112	50
M 16 x 1,5/PG 9	6,0 - 8,0	5203116	50
M 20 x 1,5/PG 11	8,0 - 10,0	5203120	50
M 20 x 1,5/PG 13,5	10,0 - 12,0	5203121	50
M 25 x 1,5/PG 16	12,0 - 14,0	5203125	50
M 25 x 1,5/PG 21	15,0 - 17,0	5203126	50
M 32 x 1,5/PG 21	15,0 - 17,0	5203132	25
M 32 x 1,5/PG 29*	17,0 - 26,0	5203133	25
M 40 x 1,5/PG 29	24,0 - 26,0	5203140	10
M 50 x 1,5/PG 36*	23,0 - 34,0	5203150	10
M 50 x 1,5/PG 42	38,0 - 40,0	5203151	10
M 63 x 1,5/PG 48*	35,0 - 45,0	5203163	10

Uvodnica kabelska
mesing niklani
sa šesterokutnim središnjim dijelom prema „starom“ DIN 46320
PG-navoj, kratki

Cable gland
nickel-plated brass
with hexagon intermediate part acc. to „old“ DIN 46320
PG-thread, short





RoHS | IP 65

Materijal:
- tijelo kabelske uvodnice: mesing niklani

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- obična ili višeslojna brtva
- raspoloživa s dugim navojem na upit

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- za primjenu u području instalacija bez posebnih zahtjeva

Material:
- Gland element: nickel-plated brass

Colour(s)/Designs:
- External thread: PG
- short thread
- simple sealing ring
- punchable sealing ring
- Available with long External thread on request

Accessories (see chapter…):
- lock nuts (3.3)


Applications:
- for Application in installation sectors without special requirements


vanjski navoj External thread	za kabel Ø mm for cable Ø mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	dimenzije višeslojne brtve mm graded dimensions for sealing ring mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread - obična brtva / simple sealing ring							
PG 7	5,0 - 7,0	5,0	14,0	13,0	-	4001001	100
PG 9	6,0 - 8,0	6,0	17,0	15,0	-	4001109	50
PG 11	8,0 - 10,0	6,0	20,0	18,0	-	4001206	50
PG 13,5	10,0 - 12,0	6,5	22,0	20,0	-	4001303	50
PG 16	12,0 - 14,0	6,5	24,0	22,0	-	4001400	25
PG 21	15,0 - 17,0	7,0	30,0	28,0	-	4001508	25
PG 29	24,0 - 26,0	8,0	40,0	37,0	-	4001559	10
PG 36	31,0 - 33,0	9,0	50,0	47,0	-	4001605	10
PG 42	39,0 - 41,0	10,0	57,0	54,0	-	4001656	5
PG 48	44,0 - 46,0	10,0	64,0	60,0	-	4001702	5
kratki navoj / short thread - višeslojna brtva / punchable sealing ring							
PG 9	2,0 - 9,0	6,0	17,0	15,0	5,0 - 7,5 - 10,0	4009100	50
PG 11	4,0 - 11,0	6,0	20,0	18,0	5,0 - 7,5 - 10,0	4009207	50
PG 13,5	4,5 - 12,0	6,5	22,0	20,0	7,5 - 10,0 - 12,5	4009304	50
PG 16	5,5 - 14,5	6,5	24,0	22,0	7,5 - 10,0 - 12,0 - 15,0	4009401	25
PG 21	8,0 - 19,0	7,0	30,0	28,0	10,0 - 13,0 - 16,0 - 19,0	4009509	25
PG 29	12,0 - 27,0	8,0	40,0	37,0	18,0 - 21,0 - 24,0 - 27,0	4009550	10
PG 36	22,0 - 33,0	9,0	50,0	47,0	24,0 - 27,0 - 30,0 - 33,0	4009606	10
PG 42	25,0 - 40,0	10,0	57,0	54,0	30,0 - 33,0 - 36,0 - 39,0	4009658	5
PG 48	30,0 - 45,0	10,0	64,0	60,0	36,0 - 39,0 - 42,0 - 45,0	4009695	5

Uvodnica kabelska
mesing niklani
sa šesterokutnim središnjim dijelom
metrički navoj, kratki
pritisni vijak s PG-navojem

Cable gland
nickel-plated brass
with hexagon intermediate part
metric thread, short
Pressure screw with PG-thread

RoHS | IP 65 | EN 50262





Materijal:
- tijelo kabelske uvodnice: mesing niklani
- obična brtva: guma
- višeslojna brtva: neopren

Radna temperatura:
guma: -40°C do 60°C
neopren: -25°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- obična ili višeslojna brtva
- pritisni vijak s PG navojem
- raspoloživa s dugim navojem na upit

Pribor (vidi poglavlje…):
- Matice (3.3)

Upotreba:
- za primjenu u području instalacija bez posebnih zahtjeva

Material:
- Gland element: nickel-plated brass
- Simple sealing ring: Rubber
- Punchable sealing ring: Neoprene

Temperature range:
Rubber: -40°C to 60°C
Neoprene: -25°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short thread
- simple sealing ring
- punchable sealing ring
- pressure screw with PG thread
- Available with long External thread on request

Accessories (see chapter…):
- lock nuts (3.3)

Applications:
- for Application in installation sectors without special requirements

vanjski navoj External thread	za kabel Ø mm for cable Ø mm	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	dimenzije višeslojne brtve mm graded dimensions for sealing ring mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread - obična brtva / simple sealing ring							
M 12 x 1,5	5,0 - 7,0	7,0	14,0	13,0	-	4103312	50
M 12 x 1,5	6,0 - 8,0	7,0	17,0	15,0	-	4103313	50
M 16 x 1,5	6,0 - 8,0	7,0	18,0	15,0	-	4103316	50
M 16 x 1,5	8,0 - 10,0	7,0	20,0	18,0	-	4103317	50
M 20 x 1,5	8,0 - 10,0	7,0	22,0	18,0	-	4103320	50
M 20 x 1,5	10,0 - 12,0	7,0	22,0	20,0	-	4103321	25
M 25 x 1,5	12,0 - 14,0	8,0	27,0	22,0	-	4103325	25
M 25 x 1,5	15,0 - 17,0	8,0	32,0	28,0	-	4103326	25
M 32 x 1,5	15,0 - 17,0	8,5	34,0	28,0	-	4103332	25
M 32 x 1,5	24,0 - 26,0	8,5	40,0	37,0	-	4103333	25
M 40 x 1,5	24,0 - 26,0	8,5	42,0	37,0	-	4103340	10
M 40 x 1,5	28,0 - 30,0	8,5	50,0	47,0	-	4103341	10
M 50 x 1,5	31,0 - 33,0	9,5	52,0	47,0	-	4103350	10
M 50 x 1,5	39,0 - 41,0	9,5	58,0	54,0	-	4103351	10
M 63 x 1,5	39,0 - 41,0	10,5	65,0	54,0	-	4103363	5
M 63 x 1,5	45,0 - 47,0	10,5	65,0	60,0	-	4103364	5
kratki navoj / short thread - višeslojna brtva / punchable sealing ring							
M 12 x 1,5	4,0 - 6,0	7,0	14,0	13,0	4,0 - 5,0 - 6,0	4103512	50
M 16 x 1,5	4,0 - 9,5	7,0	18,0	15,0	5,0 - 7,5 - 10,0	4103516	50
M 20 x 1,5	4,0 - 11,5	7,0	22,0	18,0	5,0 - 7,5 - 10,0 - 12,0	4103520	50
M 20 x 1,5	6,0 - 13,0	7,0	22,0	20,0	7,5 - 10,0 - 12,5	4103521	25
M 25 x 1,5	6,0 - 15,0	8,0	27,0	22,0	7,5 - 10,0 - 12,0 - 15,0	4103525	25
M 32 x 1,5	9,0 - 20,0	8,5	34,0	28,0	10,0 - 13,0 - 16,0 - 19,0	4103532	25
M 40 x 1,5	15,0 - 27,0	8,5	42,0	37,0	18,0 - 21,0 - 24,0 - 27,0	4103540	10
M 50 x 1,5	21,0 - 33,0	9,5	52,0	47,0	24,0 - 27,0 - 30,0 - 33,0	4103550	5
M 63 x 1,5	27,0 - 40,0	10,5	65,0	54,0	30,0 - 33,0 - 36,0 - 39,0	4103563	5

Mon.Za alat za montažu kabelskih uvodnica

Mon.Za mounting tool for cable glands





Svojstva:
- moguće samopodešavanje širina ili fiksiranje na određenu širinu
- zaporna funkcija

Characteristics:
- Self adjusting of widths across flat or Fixing of widths across flat possible
- Ratchet function



za SW for SW	broj artikla Art. no.	JP kom. PU pcs.
13,0 - 23,0 mm	9000020	1
24,0 - 36,0 mm	9000025	1



Set od 2 kom u kovčegu / 2 pcs. Set with case 13,0 - 23,0 mm i / and 24,0 - 36,0 mm	9000030	1

EMC-kabelske uvodnice

EMC-Cable glands

	stranica		page
EMC-kabelska uvodnica SCHLEMMER-TEC		EMC-Cable gland SCHLEMMER-TEC	
PROFI	54	PROFI	54
PLUS	55	PLUS	55
EMC-kabelska uvodnica WADI-TEC	56	EMC-Cable gland WADI-TEC	56
Pribor EMC		Accessories EMC	
Pločica za uzemljenje	57	Grounding Strip	57


EMC-
kabelska uvodnica SCHLEMMER-TEC PROFI

mesing niklani
metrički navoj, kratki

RoHS | IP 68 | EN 50262

EMC-
Cable gland SCHLEMMER-TEC PROFI

nickel-plated brass
metric thread, short





3.2

Materijal:
- 1/3: tijelo kabelske uvodnice: mesing niklani
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren
- 6: čelični opružni kavez

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj

Svojstva:
- **patentiirani** 360° kružni spoj
- bez oštećenja ekraniziranog omotača
- idealno za međuspajanje
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja
- maksimalna zaštita od izvlačenja kabela

Pribor (vidi poglavlje…):
- Pločica za uzemljenje (3.2)
- Matice (3.3)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- telekomunikacije
- hibridna električna vozila
- medicinska tehnika
- frekventni pretvarači
- zračne luke

Material:
- 1/3: Gland element: nickel-plated brass
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene
- 6: Spring Steel Cage

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short thread

Characteristics:
- **patented** 360° circular connection
- No breach of th braided shield
- Also ideal for intermediate contacting
- gas and water-tight
- completely twist protected
- maximum strain relief through clamp lamella

Accessories (see chapter…):
- Grounding Strip (3.2)
- lock nuts (3.3)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Tele communication
- Hybrid electric vehicle
- Medical technology
- Frequency converters
- Airports


vanjski navoj External thread	kontakt promjera Ø D mm Contact range Ø D mm	za kabel promjera Ø B mm Clamping range cable Ø B mm	SW mm SW mm	L mm L mm	E mm E mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	5,0- 9,5	6,0- 9,5	17,0	28,0	5,0	4264416	50
M 20 x 1,5	8,0-13,0	9,0-13,0	22,0	32,0	6,0	4264420	50
M 25 x 1,5	9,0-15,0	10,0-16,0	27,0	35,0	7,0	4264425	25
M 32 x 1,5	12,0-21,0	13,0-21,0	34,0	38,0	8,0	4264432	20
M 40 x 1,5	17,5-27,0	18,5-27,0	42,0	41,0	8,0	4264440	10
M 50 x 1,5	25,0-35,0	26,0-35,0	55,0	46,0	9,0	4264450	5
M 63 x 1,5	37,0-48,0	38,0-48,0	65,0	54,0	10,0	4264463	5


Montaža / Assembly

1. Skinuti vanjsku izolaciju kabela 10-15 mm ovisno o veličini.
1. Dismantle Cable 10-15 mm according to size

2. Montiranje kabelske uvodnice na kabel.
2. Assembling Cable Gland with Cable

3. Zatezanje glave uvodnice steže čelični opružni kavez i dovodi čelične kontakte u dodir sa ekranizirajućim omotačem. Time postižemo patentirani 360° kružni spoj i optimalno odvođenje elektromagnetskih valova.
3. Screwing the Dome nut is compressing the Spring Steel Cage and brings the Steel Contacts gentle onto screen. Hence we achieve a **patented** 360° (circular) connection and optimum EMC derivation.

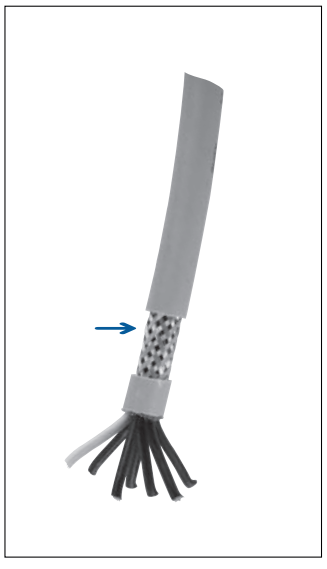

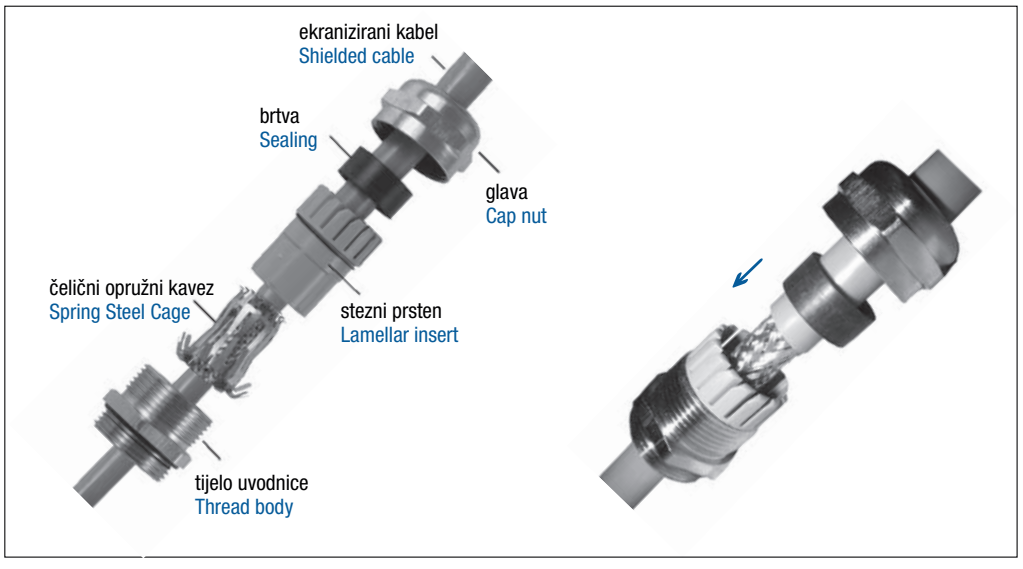


Kabelska uvodnica SCHLEMMER-TEC PLUS

mesing niklani
EMC-standardna izvedba
metrički navoj

Cable gland SCHLEMMER-TEC PLUS

nickel-plated brass
EMC-Standardversion
metric thread

RoHS | IP 68 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice: mesing niklani
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki/dugi navoj

Svojstva:
- jednostavan spoj ekrana kabela plastičnim steznim prstenom
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove

Pribor (vidi poglavlje…):
- Pločica za uzemljenje (3.2)
- Matice (3.3)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- telekomunikacije

Material:
- 1/3: Gland element: nickel-plated brass
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short/long thread

Characteristics:
- Simple Connection of braided screen with plastic lamellar insert
- maximum strain relief through clamp lamella
- gas and water-tight

Accessories (see chapter…):
- Grounding Strip (3.2)
- lock nuts (3.3)

Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Telecommunication

3.2

vanjski navoj External thread	promjer kabela mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	SW mm SW mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread						
M 12 x 1,5	4,5 - 6,5	5,0	25,0	14,0	4220950	50
M 16 x 1,5	5,0 - 9,5	5,0	28,0	17,0	4220951	50
M 20 x 1,5	8,0 - 13,0	6,0	32,0	22,0	4220952	50
M 25 x 1,5	9,0 - 16,0	7,0	35,0	27,0	4220953	25
M 32 x 1,5	12,0 - 21,0	8,0	38,0	34,0	4220954	20
M 40 x 1,5	16,0 - 27,0	8,0	41,0	42,0	4220955	10
M 50 x 1,5	23,0 - 35,0	9,0	46,0	55,0	4220956	5
M 63 x 1,5	36,0 - 48,0	10,0	54,0	65,0	4220957	5
dugi navoj / long thread						
M 12 x 1,5	4,5 - 6,5	15,0	35,0	14,0	4220958	100
M 16 x 1,5	5,0 - 9,5	15,0	38,0	17,0	4220959	50
M 20 x 1,5	8,0 - 13,0	15,0	41,0	22,0	4220960	50
M 25 x 1,5	9,0 - 16,0	15,0	43,0	27,0	4220961	25
M 32 x 1,5	12,0 - 21,0	15,0	45,0	34,0	4220962	20
M 40 x 1,5	16,0 - 27,0	15,0	48,0	42,0	4220963	10
M 50 x 1,5	23,0 - 35,0	15,0	52,0	55,0	4220964	5
M 63 x 1,5	36,0 - 48,0	15,0	59,0	65,0	4220965	5

Montaža / Assembly

1. Skinuti vanjsku izolaciju kabela 10-15 mm ovisno o veličini uvodnice.
1. Dismantle Cable 10 - 15 mm acc. to Gland size.


2. pomaknite glavu uvodnice i stezni prsten uzduž kabla.
2. Suspend Cap nut and Lamellar insert Sealing upon cable.

3. Ekranizirani omotač zaokrenite unatrag.
3. Upend the braided screen.

4. Gurnite tijelo uvodnice na ekranizirani omotač.
4. Push Thread body to the braided screen.

5. Utisnite stezni prsten sa brtvom u tijelo uvodnice - zokrenite i učvrstite.
5. Push in Lamellar insert with sealing into the thread body - twist and snap.

6. Zategnite glavu uvodnice.
6. Screw cap nut.

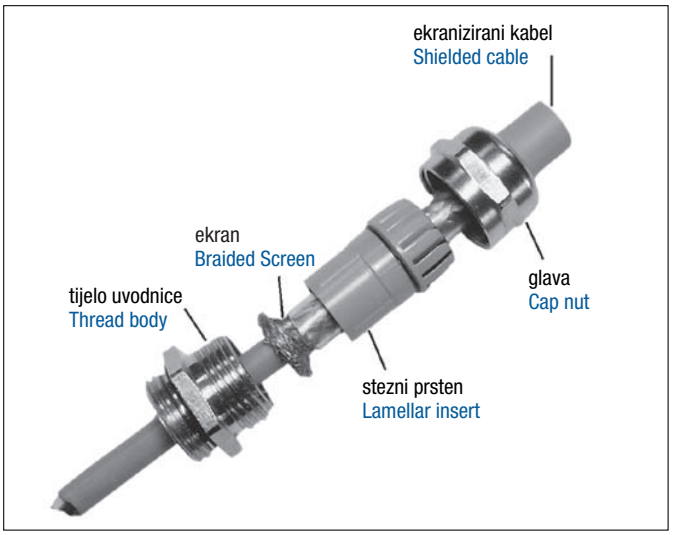

EMC-
kabelska uvodnica
WADI-TEC
mesing niklani
PG-/metrički

RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: mesing niklani
- 2: stezni prsten za EMC: pokositrena plastika
- 4: brtva: tefabloc
- 5: brtva za vanjski navoj: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: PG/metrički
- kratki/dugi navoj


Napomena:
upute za montažu na web stranici - www.schlemmer.com


Svojstva:
- kontinuirana elektromagnetska zaštita pomoću pokositrenog steznog prstena
- nepropusnost za vodu i plinove
- potpuno zaštićeno od okretanja

Pribor (vidi poglavlje…):
- Pločica za uzemljenje (3.2)
- Matice (3.3)

Upotreba:
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima
- telekomunikacije

EMC-
Cable gland
WADI-TEC
nickel-plated brass
PG-/metric thread





Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Clamping-Ring for EMC: tin-plated plastic
- 4: Sealing: Tefabloc
- 5: Sealing for External thread: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: PG/metric
- short/long thread

Note:
Assembly Instruction see Homepage www.schlemmer.com

Characteristics:
- continuous EMC protection due to tin-plated clamping ring
- gas and water-tight
- completely twist protected

Accessories (see chapter…):
- Grounding Strip (3.2)
- lock nuts (3.3)


Applications:
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations
- Telecommunication


3.2

vanjski navoj External thread	promjer kabela mm Clamping range for cable mm	promjer ekranizirajućeg omotača mm min. Clamping range for screening mm min.	duljina navoja (E) mm Thread length (E) mm	SW 1 mm SW 1 mm	SW 2 mm SW 2 mm	broj artikla niklani Art. no. nickel-plated	JP kom. PU pcs.
PG, kratki navoj / PG, short thread							
PG 7	4,0 - 6,5	4,0	5,0	14,0	14,0	4264007	100
PG 9	5,0 - 8,5	4,5	6,0	17,0	17,0	4264009	50
PG 11	7,0 - 10,5	6,0	6,0	20,0	20,0	4264011	50
PG 13,5	8,0 - 12,5	8,0	6,5	22,0	22,0	4264013	50
PG 16	10,0 - 14,5	10,0	6,5	24,0	24,0	4264016	20
PG 21	13,5 - 18,0	13,5	7,0	30,0	30,0	4264021	25
PG 29	17,0 - 24,0	17,0	8,0	40,0	40,0	4264029	10
PG 36	24,0 - 30,0	24,0	9,0	50,0	50,0	4264036	10
metrički, kratki navoj / metric, short thread							
M 12 x 1,5/7	4,0 - 6,5	4,0	7,0	14,0	14,0	4264112	100
M 16 x 1,5/7	4,0 - 6,5	4,0	7,0	14,0	17,0	4264116	100
M 16 x 1,5/9	5,0 - 8,5	4,5	7,0	17,0	17,0	4264117	50
M 20 x 1,5/11	7,0 - 10,5	6,0	7,0	20,0	22,0	4264120	50
M 20 x 1,5/13	8,0 - 12,5	8,0	7,0	22,0	22,0	4264121	50
M 25 x 1,5/16	10,0 - 14,5	10,0	8,0	24,0	26,0	4264125	25
M 25 x 1,5/21	13,5 - 18,0	13,5	8,0	30,0	30,0	4264126	25
M 32 x 1,5/21	13,5 - 18,0	13,5	8,5	30,0	33,0	4264132	10
M 32 x 1,5/29	17,0 - 24,0	17,0	8,5	40,0	40,0	4264133	10
M 40 x 1,5/29	17,0 - 24,0	17,0	8,5	40,0	42,0	4264134	10
M 40 x 1,5/36	24,0 - 30,0	24,0	8,5	50,0	50,0	4264135	10
metrički, dugi navoj / metric, long thread							
M 16 x 1,5/9	5,0 - 8,5	4,5	13,0	17,0	17,0	4264217	50
M 20 x 1,5/13	8,0 - 12,5	8,0	13,0	22,0	22,0	4264221	50
M 25 x 1,5/21	13,5 - 18,0	13,5	14,0	30,0	30,0	4264226	25
M 32 x 1,5/29	17,0 - 24,0	17,0	14,5	40,0	40,0	4264232	10
M 40 x 1,5/29	17,0 - 24,0	17,0	14,5	40,0	42,0	4264240	10
M 40 x 1,5/36	24,0 - 30,0	24,0	14,5	50,0	50,0	4264241	10

Pribor EMC
Pločica za uzemljenje
mesing

Accessories EMC
Grounding Strip
brass blank





RoHS

Materijal:
mesing

Boje/izvedbe:
- vanjski navoj: PG/metrički/plinski

Svojstva:
- kontakti za lemljenje i naticanje
- pločica za uzemljenje se postavlja na spojni navoj i učvršćuje maticom
- za ravni konektor 6,35 mm x 0,8 mm

Upotreba:
- uzemljenje spojnog navoja u plastičnim kućištima

Material:
brass blank

Colour(s)/Designs:
- Connecting thread: PG/metric/Gas

Characteristics:
- Connections solderable/stuckable
- Grounding strip is placed on the connecting thread and fixed by lock nut
- for flat connector 6,35 mm x 0,8 mm

Applications:
- Grounding connection for connecting thread in plastic housing

3.2

spojni navoj PG Connecting thread PG	spojni navoj metrički Connecting thread metric	spojni navoj plinski Connecting thread Gas	vanjski promjer (A) mm External Diameter (A) mm	unutarnji-promjer (I) mm Internal Diameter (I) mm	broj artikla blank Art. no. blank	JP kom. PU pcs.
PG 7	M 12	1/4"	24,0	13,0	8101078	slobodno / loose
PG 9			24,0	16,0	8101094	slobodno / loose
	M 16	3/8"	24,0	16,5	8101516	slobodno / loose
PG 11			28,0	19,0	8101116	slobodno / loose
	M 20		28,0	20,5	8101520	slobodno / loose
PG 13,5		1/2"	28,0	21,0	8101132	slobodno / loose
PG 16		5/8"	32,0	23,0	8101167	slobodno / loose
	M 25		32,0	25,5	8101525	slobodno / loose
PG 21		3/4"	37,0	29,0	8101213	slobodno / loose
	M 32	1"	40,0	33,0	8101532	slobodno / loose
PG 29		1 1/8"	52,0	38,0	8101299	slobodno / loose
	M 40		52,0	40,5	8101540	slobodno / loose
PG 36		1 1/2"	62,0	48,0	8101361	slobodno / loose
	M 50		62,0	50,5	8101550	slobodno / loose
PG 42		1 3/4"	71,0	55,0	8101421	slobodno / loose
PG 48		2"	78,0	61,0	8101485	slobodno / loose
	M 63		78,0	63,5	8101563	slobodno / loose


Pribor


Accessories

	stranica		page
Matice		Lock nuts	
plastika PA	60	Plastic PA	60
mesing niklani	61 - 63	Nickel-plated brass	61 - 63
nehrđajući čelik	64	Stainless steel	64
Redukcije		Reducers	
plastika PC	65	Plastic PC	65
plastika PA	66 - 67	Plastic PA	66 - 67
mesing niklani	68 - 72	Nickel-plated brass	68 - 72
Proširenja		Enlargers	
plastika PA	73	Plastic PA	73
mesing niklani	74 - 75	Nickel-plated brass	74 - 75
Međukomadi	76 - 79	Intermediate Parts	76 - 79
Pritisni vijci	80 - 83	Pressure Screws	80 - 83
Čepovi		Plugs	
plastika PC	84	Plastic PC	84
plastika PA	85	Plastic PA	85
mesing niklani	86 - 88	Nickel-plated brass	86 - 88
Prirubnice kutne 90°		Flange angle 90°	
plastika PA	89	Plastic PA	89
metal	90	Zinc	90
Koljeno 90°	91	Elbow 90°	91
Brtveni čep	92	Plug Sealing clamp	92
O-brtva	93	O-rings	93
Brtva plosnata	94	Flat sealings	94
Brtve	95 - 96	Sealing Rings	95 - 96
Pritisni prsten	97	Pressure Rings	97
Brtveni prsten za spojne navoje	98	Packing Ring for connection thread	98
Brtva slijepa	99	Dummy Discs	99

Matica
poliamid
PG-/metrički/NPT-navoj

Lock nuts
Polyamide
PG-/metric//NPT-thread





RoHS

Materijal:
poliamid 6
ojačano s 25% staklenih vlakana
* nije ojačano staklenin vlaknima

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- navoj: PG/metrički/NPT

Svojstva:
- PG prema „starom“ DIN 46 320
- PG „mali“ SW
- ojačano staklenim vlaknima, za maksimalnu mehaničku stabilnost

Upotreba:
- odgovara za sve kabelske i cijevne uvodnice kao i za pribor

Material:
Polyamide 6
25 % glassfiber reinforced
* not glassfiber reinforced

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- light grey, silver grey, jet black
- Thread: PG/metric/NPT

Characteristics:
- PG acc. to „old“ DIN 46 320
- PG „small“ SW
- glassfiber reinforced, for maximum mechanical stability


Applications:
- suitable for all Cable- and Conduit Glands as well as Accessories

3.3

navoj Thread	debljina (S) mm Thickness (S) mm	SW mm SW mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG (prema „starom“ DIN 46320) / PG (according to „old“ DIN 46320)						
PG 7	5,0	19,0	7211881	7211807	7211851	50
PG 9	5,0	22,0	7211882	7211809	7211852	50
PG 11	5,0	24,0	7211883	7211811	7211853	50
PG 13,5	6,0	27,0	7211884	7211813	7211854	50
PG 16	6,0	30,0	7211885	7211816	7211855	50
PG 21	6,5	36,0	7211886	7211821	7211856	20
PG 29	7,5	46,0	7211887	7211829	7211857	20
PG 36*	8,0	59,0	7211888	7211836	7211858	10
PG 42*	9,0	64,0	7211889	7211842	7211859	5
PG 48*	9,5	69,0	7211890	7211848	7211860	5
PG „mali“ SW / PG „small“ SW						
PG 7	5,0	15,0	7211765	7211707	7211751	50
PG 9	5,0	19,0	7211766	7211709	7211752	50
PG 11	5,0	22,0	7211767	7211711	7211753	50
PG 13,5	5,0	24,0	7211768	7211713	7211754	50
PG 16	6,0	27,0	7211769	7211716	7211755	50
PG 21	6,5	32,0	7211770	7211721	7211756	25
PG 29	7,5	41,0	7211771	7211729	7211757	20
metrički / metric						
M 12 x 1,5	5,0	19,0	7211979	7211969	7211974	50
M 16 x 1,5	5,0	22,0	7211980	7211970	7211975	50
M 20 x 1,5	5,0	24,0	7211981	7211971	7211976	50
M 25 x 1,5	6,0	30,0	7211982	7211972	7211977	50
M 32 x 1,5	7,5	38,0	7211983	7211973	7211978	50
M 40 x 1,5	8,0	50,0	7211984	7211987	7211990	20
M 50 x 1,5	9,0	60,0	7211960	7211462	7211464	10
M 50 x 1,5	10,0	75,0	7211961	7211463	7211465	5
M 50 x 1,5*	9,0	60,0	7211985	7211988	7211991	10
M 63 x 1,5*	10,0	75,0	7211986	7211989	7211992	5
NPT / NPT						
NPT 3/8"	5,0	22,0	7211485	7211490	7211495	50
NPT 1/2"	6,0	27,0	7211486	7211491	7211496	50
NPT 3/4"	6,5	36,0	7211487	7211492	7211497	25
NPT 1"	7,5	41,0	7211488	7211493	7211498	20

Matica
mesing niklani
PG-/metrički navoj

Lock nuts
nickel-plated brass
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
• navoj: PG/metrički

Svojstva:
• PG prema „starom“ DIN 46 320

Upotreba:
• odgovara za PG/metričke kabelske i cijevne uvodnice, kao i za pribor

Material:
nickel-plated brass

Colour(s)/Designs:
• Thread: PG/metric


Characteristics:
• PG acc. to „old“ DIN 46 320

Applications:
• suitable for PG/metric Cable- and Conduit Glands as well as Accessories

navoj Thread	debljina (S) mm Thickness (S) mm	SW mm SW mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG (prema „starom“ DIN 46320) / PG (acc. to „old“ DIN 46320)				
PG 7	2,9	15,0	6000070	50
PG 9	2,9	18,0	6000096	50
PG 11	2,9	21,0	6000118	50
PG 13,5	3,1	23,0	6000134	50
PG 16	3,1	26,0	6000169	50
PG 21	3,6	32,0	6000215	20
PG 29	4,1	41,0	6000290	20
PG 36	5,1	51,0	6000363	10
PG 42	5,1	60,0	6000428	5
PG 48	5,6	64,0	6000487	5
metrički / metric				
M 6 x 1,0	3,5	8,0	6004067	50
M 8 x 1,25	3,5	11,0	6004083	50
M 10 x 1,5	3,5	12,0	6004105	50
M 12 x 1,5	3,0	15,0	6004121	50
M 16 x 1,5	2,8	19,0	6004165	50
M 16 x 1,5	3,0	20,0	6004164	50
M 20 x 1,5	3,5	24,0	6004202	50
M 25 x 1,5	3,5	30,0	6004253	25
M 32 x 1,5	4,5	35,0	6004326	20
M 40 x 1,5	4,5	45,0	6004407	10
M 50 x 1,5	5,5	55,0	6004504	10
M 63 x 1,5	6,0	70,0	6004636	5
M 75 x 1,5	8,0 (10,0)	80,0	6004750	1
M 80 x 2,0 XXL	10,0	95,0	6004752	5
M 90 x 2,0 XXL	10,0	100,0	6004754	5
M 100 x 2,0 XXL	12,0	115,0	6004756	5
M 105 x 2,0 XXL	12,0	115,0	6004757	5
M 110 x 2,0 XXL	12,0	125,0	6004758	1

Matica
mesing niklani
NPT-navoj

Lock nuts
nickel-plated brass
NPT-thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
• navoj: NPT

Upotreba:
• odgovara za NPT kabelske i cijevne uvodnice, kao i za pribor

Material:
nickel-plated brass

Colour(s)/Designs:
• Thread: NPT


Applications:
• suitable for NPT Cable- and Conduit Glands as well as Accessories

3.3

navoj Thread	debljina (S) mm Thickness (S) mm	SW mm SW mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
NPT 1/4“	2,8	17,0	6002010	100
NPT 3/8“	5,0	21,0	6002005	50
NPT 1/2“	5,0	24,0	6002006	50
NPT 3/4“	7,0	30,0	6002007	20
NPT 1“	7,0	36,0	6002008	20
NPT 1 1/2“	5,5	55,0	6002011	5
NPT 2“	5,5	64,0	6002012	50

Matica
mesing niklani
nazubljena
PG-/metrički navoj

Lock nuts
nickel-plated brass
ribbed
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- navoj: PG/metrički
- nazubljena

Svojstva:
- PG prema „starom“ DIN 46 320

Upotreba:
- odgovara za PG-/metričke kabelske i cijevne uvodnice, kao i za pribor
- EMC zaštita (poglavlje 3.2)

Material:
nickel-plated brass

Colour(s)/Designs:
- Thread: PG/metric
- ribbed


Characteristics:
- PG acc. to „old“ DIN 46 320

Applications:
- suitable for PG-/metric Cable- and Conduit Glands as well as Accessories
- EMC-applications (Chapter 3.2)

navoj Thread	debljina (S) mm Thickness (S) mm	SW mm SW mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG (prema „starom“ DIN 46320) / PG (acc. to „old“ DIN 46320)				
PG 7	2,9	15,0	6011007	50
PG 9	2,9	18,0	6011009	50
PG 11	3,1	21,0	6011011	50
PG 13,5	3,1	23,0	6011013	50
PG 16	3,1	26,0	6011016	50
PG 21	3,6	32,0	6011021	20
PG 29	4,1	41,0	6011029	20
PG 36	5,1	51,0	6011036	10
PG 42	5,1	60,0	6011042	10
PG 48	5,6	64,0	6011048	10
metrički / metric				
M 12 x 1,5	3,0	15,0	6011112	50
M 16 x 1,5	3,0	19,0	6011116	50
M 20 x 1,5	3,5	24,0	6011120	50
M 25 x 1,5	3,5	30,0	6011125	25
M 32 x 1,5	4,5	35,0	6011132	20
M 40 x 1,5	4,5	45,0	6011140	10
M 50 x 1,5	5,5	55,0	6011150	10
M 63 x 1,5	6,0	70,0	6011163	10

Matica
nehrđajući čelik 1.4404,
INOX 316L
PG-/metrički navoj

Lock nuts
stainless steel 1.4404,
INOX 316L
PG-/metric thread





RoHS

Materijal:
nehrđajući čelik 1.4404, INOX 316L

Boje/izvedbe:
• navoj: PG/metrički

Svojstva:
• PG prema „starom“ DIN 46 320

Upotreba:
• odgovara za PG-/metričke kabelske i cijevne uvodnice, kao i za pribor

Material:
stainless steel 1.4404, INOX 316L

Colour(s)/Designs:
• Thread: PG/metric

Characteristics:
• PG acc. to „old“ DIN 46 320

Applications:
• suitable for PG-/metric Cable- and Conduit Glands as well as Accessories

3.3

navoj Thread	debljina (S) mm Thickness (S) mm	SW mm SW mm	broj artikla nehrđajući čelik Art. no. stainless steel	JP kom. PU pcs.
PG (prema „starom“ DIN 46320) / PG (acc. to „old“ DIN 46320)				
PG 7	2,9	15,0	6008207	50
PG 9	2,9	19,0	6008209	50
PG 11	3,1	21,0	6008211	50
PG 13,5	3,1	23,0	6008213	50
PG 16	3,1	26,0	6008216	25
PG 21	3,6	32,0	6008221	20
PG 29	4,1	42,0	6008229	15
PG 36	5,1	57,0	6008236	10
PG 42	5,1	60,0	6008242	10
PG 48	5,6	65,0	6008248	10
metrički / metric				
M 12 x 1,5	3,0	15,0	6010112	50
M 16 x 1,5	3,0	19,0	6010116	50
M 20 x 1,5	3,5	24,0	6010120	50
M 25 x 1,5	3,5	30,0	6010125	25
M 32 x 1,5	4,5	35,0	6010132	20
M 40 x 1,5	4,5	45,0	6010140	10
M 50 x 1,5	5,5	55,0	6010150	10
M 63 x 1,5	6,0	70,0	6010163	5

Redukcija
polikarbonat
PG-navoj

Reducers
Polycarbonate
PG-thread

oblik A / Form A



oblik B / Form B



RoHS

Materijal:
polikarbonat

Radna temperatura:
-40°C do 135°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: PG
- unutarnji navoj: PG
- šesterokutna


Upotreba:
- izrada strojeva i aparata
- kućišta


Material:
Polycarbonate

Temperature range:
-40°C to 135°C

Colour(s)/Designs:
- light grey
- External thread: PG
- Internal thread: PG
- hexagon

Applications:
- Machines and apparatus construction
- Housings





vanjski navoj (Ø PG1) External thread (Ø PG1)	unutarnji navoj (Ø PG2) Internal thread (Ø PG2)	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	broj artikla svjetlosiva Art. no. light grey	JP kom. PU pcs.
oblik A / Form A						
PG 11	PG 7	RED 11/7M	22,0	8,0	7005016	50
PG 13,5	PG 7	RED 13/7M	24,0	9,0	7005024	50
PG 13,5	PG 9	RED 13/9M	24,0	9,0	7005032	50
PG 16	PG 9	RED 16/9M	27,0	9,0	7005040	50
PG 16	PG 11	RED 16/11M	27,0	9,0	7005059	50
PG 21	PG 11	RED 21/11M	32,0	11,0	7005067	25
PG 21	PG 13,5	RED 21/13M	32,0	11,0	7005075	25
PG 21	PG 16	RED 21/16M	32,0	11,3	7005202	25
PG 29	PG 13,5	RED 29/13M	41,0	12,0	7005083	25
PG 29	PG 16	RED 29/16M	41,0	12,0	7005091	25
PG 29	PG 21	RED 29/21M	41,0	12,0	7005210	25
PG 36	PG 16	RED 36/16M	50,0	14,0	7005105	10
PG 36	PG 21	RED 36/21M	55,0	14,0	7005113	10
PG 36	PG 29	RED 36/29M	50,0	14,0	7005229	10
PG 42	PG 21	RED 42/21M	55,0	16,0	7005121	10
PG 42	PG 29	RED 42/29M	55,0	16,0	7005130	10
PG 42	PG 36	RED 42/36M	55,0	16,0	7005237	10
PG 48	PG 29	RED 48/29M	60,0	16,0	7005148	10
PG 48	PG 36	RED 48/36M	60,0	16,0	7005156	10
oblik B / Form B						
PG 9	PG 7	RED 9/7M	19,0	7,0	7005164	50
PG 11	PG 9	RED 11/9M	22,0	8,0	7005172	50
PG 13,5	PG 11	RED 13/11M	24,0	9,0	7005180	50
PG 16	PG 13,5	RED 16/13M	27,0	9,0	7005199	50
PG 48	PG 42	RED 48/42M	60,0	15,5	7005245	10

Redukcija
poliamid
PG-navoj

Reducers
Polyamide
PG-thread





RoHS

Materijal:
poliamid ojačan staklenim vlaknima

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: PG
- unutarnji navoj: PG
- šesterokutna


Upotreba:
- izrada strojeva i aparata
- kućišta


Material:
Polyamide glassfiber reinforced

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- light grey
- External thread: PG
- Internal thread: PG
- hexagon

Applications:
- Machines and apparatus construction
- Housings







vanjski navoj (Ø PG1) External thread (Ø PG1)	unutarnji navoj (Ø PG2) Internal thread (Ø PG2)	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	broj artikla svjetlosiva Art. no. light grey	JP kom. PU pcs.
oblik A / Form A						
PG 9	PG 7	907 PA	19,0	8,0	7005301	100
PG 11	PG 9	1109 PA	22,0	8,0	7005303	100
PG 13,5	PG 11	1311 PA	24,0	9,0	7005306	100
PG 16	PG 13,5	1613 PA	27,0	10,0	7005309	100
oblik B / Form B						
PG 11	PG 7	1107 PA	22,0	8,0	7005302	100
PG 13,5	PG 7	1307 PA	24,0	9,0	7005304	100
PG 13,5	PG 9	1309 PA	24,0	9,0	7005305	100
PG 16	PG 9	1609 PA	27,0	10,0	7005307	100
PG 16	PG 11	1611 PA	27,0	10,0	7005308	100
PG 21	PG 11	2111 PA	32,0	11,0	7005310	100
PG 21	PG 13,5	2113 PA	32,0	11,0	7005311	100
PG 21	PG 16	2116 PA	32,0	11,0	7005312	100
PG 29	PG 13,5	2913 PA	40,0	11,0	7005313	50
PG 29	PG 16	2916 PA	40,0	11,0	7005314	50
PG 29	PG 21	2921 PA	40,0	11,0	7005315	50
PG 36	PG 21	3621 PA	50,0	13,0	7005317	50
PG 36	PG 29	3629 PA	50,0	18,0	7005318	50
PG 42	PG 21	4221 PA	55,0	18,0	7005319	25
PG 42	PG 29	4229 PA	55,0	18,0	7005320	25
PG 42	PG 36	4236 PA	55,0	18,0	7005321	25
PG 48	PG 29	4829 PA	60,0	18,0	7005322	25
PG 48	PG 36	4836 PA	60,0	14,0	7005323	25
PG 48	PG 42	4842 PA	60,0	17,0	7005324	25

Redukcija
poliamid
metrički navoj

Reducers
Polyamide
metric thread





RoHS

Materijal:
poliamid
25% ojačan staklenim vlaknima

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: metrički
- unutarnji navoj: metrički
- šesterokutna

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
Polyamide
25% glassfiber reinforced

Temperature range:
-40°C to 100°C


Colour(s)/Designs:
- light grey
- External thread: metric
- Internal thread: metric
- hexagon


Applications:
- Machines and apparatus construction
- Housings

vanjski navoj External thread	unutarnji navoj Internal thread	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
M 16 x 1,5	M 12 x 1,5	20,0	8,0	7008516	7008616	7008716	50
M 20 x 1,5	M 12 x 1,5	20,0	9,0	7008519	7008619	7008719	50
M 20 x 1,5	M 16 x 1,5	24,0	9,0	7008520	7008620	7008720	50
M 25 x 1,5	M 12 x 1,5	30,0	10,0	7008523	7008623	7008723	50
M 25 x 1,5	M 16 x 1,5	30,0	10,0	7008524	7008624	7008724	50
M 25 x 1,5	M 20 x 1,5	30,0	10,0	7008525	7008625	7008725	50
M 32 x 1,5	M 16 x 1,5	36,0	11,0	7008530	7008630	7008730	50
M 32 x 1,5	M 20 x 1,5	36,0	11,0	7008531	7008631	7008731	50
M 32 x 1,5	M 25 x 1,5	36,0	11,0	7008532	7008632	7008732	50
M 40 x 1,5	M 20 x 1,5	44,0	12,0	7008538	7008638	7008738	50
M 40 x 1,5	M 25 x 1,5	44,0	12,0	7008539	7008639	7008739	50
M 40 x 1,5	M 32 x 1,5	44,0	12,0	7008540	7008640	7008740	50
M 50 x 1,5	M 25 x 1,5	55,0	13,0	7008548	7008648	7008748	20
M 50 x 1,5	M 32 x 1,5	55,0	13,0	7008549	7008649	7008749	20
M 50 x 1,5	M 40 x 1,5	55,0	13,0	7008550	7008650	7008750	20
M 63 x 1,5	M 32 x 1,5	70,0	15,0	7008561	7008661	7008761	20
M 63 x 1,5	M 40 x 1,5	70,0	15,0	7008562	7008662	7008762	20
M 63 x 1,5	M 50 x 1,5	70,0	15,0	7008563	7008663	7008763	10

Redukcija
mesing niklani
PG-navoj

Reducers
nickel-plated brass
PG-thread





RoHS

Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: PG
- šesterokutna

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- Internal thread: PG
- hexagon


Applications:
- Machines and apparatus construction
- Housings

3.3

vanjski navoj (Ø PG1)	unutarnji navoj (Ø PG2)	tip	SW mm	duljina navoja (E) mm	ukupna duljina (L) mm	broj artikla bez O-brtve	broj artikla sa O-brtvom	JP kom.
External thread (Ø PG1)	Internal thread (Ø PG2)	Type	SW mm	Thread length (E) mm	Complete length (L) mm	Art. no. without O-ring	Art. no. with O-ring	PU pcs.
PG 9	PG 7	RS9/7	17,0	5,0	8,0	6102018	6102300	100
PG 11	PG 9	RS11/9	19,0	6,0	9,0	6102034	6102310	100
PG 11	PG 7	RS11/7	19,0	6,0	9,0	6102030	6102311	100
PG 13,5	PG 11	RS13,5/11	21,0	6,0	9,0	6102077	6102320	100
PG 13,5	PG 9	RS13,5/9	21,0	6,0	9,0	6102042	6102321	100
PG 13,5	PG 7	RS13,5/7	21,0	6,0	8,5	6102026	6102322	100
PG 16	PG 13,5	RS16/13	23,0	6,0	9,0	6102115	6102330	100
PG 16	PG 11	RS16/11	23,0	6,0	9,0	6102085	6102331	100
PG 16	PG 9	RS16/9	23,0	6,0	9,0	6102050	6102332	100
PG 16	PG 7	RS16/7	24,0	7,0	10,0	-	6102333	100
PG 21	PG 16	RS21/16	29,0	7,0	10,0	6102158	6102340	50
PG 21	PG 13,5	RS21/13,5	29,0	7,0	10,0	6102123	6102341	50
PG 21	PG 11	RS21/11	29,0	7,0	10,0	6102093	6102342	20
PG 21	PG 9	RS21/9	29,0	7,0	10,0	6102069	-	50
PG 29	PG 21	RS29/21	39,0	8,0	11,0	6102190	6102350	25
PG 29	PG 16	RS29/16	39,0	8,0	11,0	6102166	6102351	25
PG 29	PG 13,5	RS29/13,5	39,0	8,0	11,0	6102131	6102352	25
PG 29	PG 11	RS29/11	39,0	8,0	11,0	6102107	-	25
PG 36	PG 29	RS36/29	50,0	8,0	11,0	6102220	6102360	25
PG 36	PG 21	RS36/21	50,0	8,0	11,0	6102204	6102361	25
PG 36	PG 13,5	RS36/13,5	50,0	8,0	11,0	6102140	-	25
PG 42	PG 36	RS42/36	64,0	10,0	14,0	6102241	6102370	25
PG 42	PG 29	RS42/29	64,0	10,0	14,0	6102239	6102371	25
PG 48	PG 42	RS48/42	64,0	10,0	14,0	6102258	6102380	25
PG 48	PG 36	RS48/36	64,0	10,0	14,0	6102255	6102381	25
PG 48	PG 29	RS48/29	64,0	10,0	14,0	6102247	-	25
PG 48	PG 21	RS48/21	64,0	10,0	14,0	6102212	-	25
PG 48	PG 16	RS48/16	64,0	10,0	14,0	6102182	-	25

Redukcija
mesing niklani
metrički/PG-navoj

Reducers
nickel-plated brass
metric/PG-thread





RoHS

Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički / PG
- unutarnji navoj: metrički/metrički
- šesterokutna

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-40°C to 100°C


Colour(s)/Designs:
- External thread: metric / PG
- Internal thread: metric/metric
- hexagon


Applications:
- Machines and apparatus construction
- Housings

vanjski navoj (Ø M1/PG) External thread (Ø M1/PG)	unutarnji navoj (Ø M2) Internal thread (Ø M2)	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla bez O-brtve Art. no. without O-ring	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
metrički / metric	**metrički / metric**							
M 16 x 1,5	M 12 x 1,5	RSM16/12	20,0	7,0	10,0	6102400	6102450	50
M 20 x 1,5	M 12 x 1,5	RSM20/12	24,0	7,0	10,0	6102404	6102455	50
M 20 x 1,5	M 16 x 1,5	RSM20/16	24,0	7,0	10,0	6102405	6102460	50
M 25 x 1,5	M 16 x 1,5	RSM25/16	30,0	8,0	11,5	6102409	6102464	20
M 25 x 1,5	M 20 x 1,5	RSM25/20	30,0	8,0	11,5	6102410	6102465	20
M 32 x 1,5	M 16 x 1,5	RSM32/16	36,0	8,5	12,5	6102414	6102468	20
M 32 x 1,5	M 20 x 1,5	RSM32/20	36,0	8,5	12,5	6102413	6102469	20
M 32 x 1,5	M 25 x 1,5	RSM32/25	36,0	8,5	12,5	6102415	6102470	20
M 40 x 1,5	M 25 x 1,5	RSM40/25	42,0	8,5	12,5	6102419	6102474	10
M 40 x 1,5	M 32 x 1,5	RSM40/32	42,0	8,5	12,5	6102420	6102475	10
M 50 x 1,5	M 32 x 1,5	RSM50/32	55,0	9,5	14,5	6102424	6102479	10
M 50 x 1,5	M 40 x 1,5	RSM50/40	55,0	9,5	14,5	6102425	6102480	5
M 63 x 1,5	M 40 x 1,5	RSM63/40	70,0	10,5	17,5	6102429	6102484	5
M 63 x 1,5	M 50 x 1,5	RSM63/50	70,0	10,5	17,5	6102430	6102485	5
M 75 x 1,5	M 63 x 1,5	RSM75/63	80,0	11,5	19,5	6102435	6102490	1
PG /PG								
PG 9	M 6 x 1,0	3509.M 6	18,0	6,5	9,5	-	6104106	50
PG 9	M 8 x 1,25	3509.M 8	18,0	6,5	9,5	-	6104108	50
PG 9	M 10 x 1,5	3509.M 10	18,0	6,5	9,5	-	6104110	50
PG 11	M 6 x 1,0	3511.M 6	20,0	6,5	9,5	-	6104206	50
PG 11	M 8 x 1,25	3511.M 8	20,0	6,5	9,5	-	6104208	50
PG 11	M 10 x 1,5	3511.M 10	20,0	6,5	9,5	-	6104210	50
PG 11	M 12 x 1,5	3511.M 12	20,0	5,0	8,0	-	6104212	50
PG 16	M 16 x 1,5	3516.M 16	24,0	7,0	10,0	-	6104416	50
PG 21	M 25 x 1,5	3521.M 25	30,0	7,5	11,0	-	6104525	50
PG 29	M 32 x 1,5	3529.M 32	38,0	8,0	12,0	-	6104632	50

Redukcija
mesing niklani
nazubljena
PG-navoj

Reducer
nickel-plated brass
milled
PG-thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: PG
- okrugla
- nazubljena

Svojstva:
- PG prema „starom“ DIN 46 320

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: PG
- Internal thread: PG
- round
- milled

Characteristics:
- PG acc. to „old“ DIN 46 320


Applications:
- Machines and apparatus construction
- Housings


3.3

vanjski navoj (d1) / External thread (d1)	unutarnji navoj (d2) / Internal thread (d2)	tip / Type	promjer (D) mm / Diameter (D) mm	duljina navoja (E) mm / Thread length (E) mm	ukupna duljina (L) mm / Complete length (L) mm	broj artikla niklano / Art. no. nickel-plated	JP kom. / PU pcs.
prema „starom“ DIN 46320 / acc. to „old“ DIN 46320							
PG 9	PG 7	90007	17,0	6,0	8,5	6100015	50
PG 11	PG 7	11007	20,0	6,0	8,5	6100023	50
PG 11	PG 9	11009	20,0	6,0	9,0	6100031	50
PG 13,5	PG 7	13507	22,0	6,5	9,0	6100040	50
PG 13,5	PG 9	13509	22,0	6,5	9,5	6100058	50
PG 13,5	PG 11	13511	22,0	6,5	9,5	6100066	50
PG 16	PG 7	16007	24,0	6,5	9,5	6100074	25
PG 16	PG 9	16009	24,0	6,5	9,5	6100082	25
PG 16	PG 11	16011	24,0	6,5	9,5	6100090	25
PG 16	PG 13,5	16135	24,0	6,5	9,5	6100104	25
PG 21	PG 11	21011	30,0	7,0	10,0	6100112	20
PG 21	PG 13,5	21135	30,0	7,0	10,0	6100120	20
PG 21	PG 16	21016	30,0	7,0	10,0	6100139	20
PG 29	PG 16	29016	39,0	8,0	11,5	6100147	15
PG 29	PG 21	29021	39,0	8,0	11,5	6100155	15
PG 36	PG 21	36021	50,0	9,0	12,5	6100163	10
PG 36	PG 29	36029	50,0	9,0	12,5	6100171	10
PG 42	PG 29	42029	57,0	10,0	14,0	6100180	10
PG 42	PG 36	42036	57,0	10,0	14,0	6100198	10
PG 48	PG 36	48036	64,0	10,0	14,0	6100201	10
PG 48	PG 42	48042	64,0	10,0	14,0	6100210	10

Redukcija
mesing niklani
nazubljena
metrički/PG-navoj

Reducers
nickel-plated brass
milled
metric/PG-thread





MS

Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: PG
- okrugla
- nazubljena

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-40°C to 100°C


Colour(s)/Designs:
- External thread: metric
- Internal thread: PG
- round
- milled

Applications:
- Machines and apparatus construction
- Housings

vanjski navoj (d1) External thread (d1)	unutarnji navoj (d2) Internal thread (d2)	promjer (D) mm Diameter (D) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla bez O-brtve Art. no. without O-ring	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
M 16 x 1,5	PG 7	20,0	6,0	9,0	6104716	6104770	100
M 20 x 1,5	PG 9	24,0	6,5	9,5	6104720	6104771	50
M 25 x 1,5	PG 11	30,0	7,0	10,0	6104725	6104772	50
M 25 x 1,5	PG 13,5	30,0	7,0	10,0	6104726	6104773	50
M 25 x 1,5	PG 16	30,0	7,0	10,0	6104727	6104774	50
M 32 x 1,5	PG 16	34,0	8,0	11,5	6104732	6104775	20
M 32 x 1,5	PG 21	34,0	8,0	11,5	6104733	6104776	20
M 40 x 1,5	PG 21	50,0	9,0	12,0	6104740	6104777	10
M 50 x 1,5	PG 29	57,0	9,0	12,0	6104750	6104778	5
M 63 x 1,5	PG 36	70,0	10,5	14,5	6104763	6104779	1
M 63 x 1,5	PG 42	70,0	10,5	14,5	6104764	6104780	1

Redukcija
mesing niklani
nazubljena
metrički/PG-navoj

Reducers
nickel-plated brass
milled
metric/PG-thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- vanjski navoj: metrički / PG
- unutarnji navoj: metrički/metrički
- okrugla
- nazubljena

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: metric / PG
- Internal thread: metric/metric
- round
- milled


Applications:
- Machines and apparatus construction
- Housings


3.3

vanjski navoj (d1) / External thread (d1)	unutarnji navoj (d2) / Internal thread (d2)	promjer (D) mm / Diameter (D) mm	duljina navoja (E) mm / Thread length (E) mm	ukupna duljina (L) mm / Complete length (L) mm	broj artikla niklano / Art. no. nickel-plated	JP kom. / PU pcs.
metrički / metric	**metrički / metric**					
M 16 x 1,5	M 12 x 1,5	18,0	5,0	7,5	6104817	100
M 16 x 1,5	M 12 x 1,5	20,0	7,0	10,0	6104816	50
M 20 x 1,5	M 12 x 1,5	22,0	6,0	9,0	6104818	100
M 20 x 1,5	M 12 x 1,5	24,0	7,0	10,0	6104819	50
M 20 x 1,5	M 16 x 1,5	22,0	6,0	9,0	6104821	100
M 20 x 1,5	M 16 x 1,5	24,0	7,0	10,0	6104820	50
M 25 x 1,5	M 16 x 1,5	30,0	8,0	11,5	6104824	50
M 25 x 1,5	M 20 x 1,5	27,0	7,0	10,0	6104826	100
M 25 x 1,5	M 20 x 1,5	30,0	8,0	11,5	6104825	50
M 32 x 1,5	M 20 x 1,5	34,0	8,0	11,0	6104830	25
M 32 x 1,5	M 20 x 1,5	34,0	8,5	12,5	6104831	20
M 32 x 1,5	M 25 x 1,5	34,0	8,0	11,0	6104833	50
M 32 x 1,5	M 25 x 1,5	34,0	8,5	12,5	6104832	20
M 40 x 1,5	M 25 x 1,5	43,0	8,0	11,5	6104838	20
M 40 x 1,5	M 25 x 1,5	50,0	8,5	12,5	6104839	20
M 40 x 1,5	M 32 x 1,5	50,0	8,5	12,5	6104840	20
M 50 x 1,5	M 32 x 1,5	57,0	9,5	14,5	6104849	10
M 50 x 1,5	M 40 x 1,5	57,0	9,5	14,5	6104850	10
M 63 x 1,5	M 40 x 1,5	70,0	10,5	17,5	6104862	5
M 63 x 1,5	M 50 x 1,5	70,0	10,5	17,5	6104863	5
M 75 x 1,5	M 63 x 1,5	80,0	11,5	19,5	6104875	1
PG /PG	**metrički / metric**					
PG 16	M 20 x 1,5	24,0	7,0	10,0	6100416	50
PG 21	M 25 x 1,5	30,0	8,0	11,5	6100421	20
PG 29	M 25 x 1,5	39,0	9,0	12,5	6100429	20

Proširenje
poliamid
PG-/metrički navoj

Enlargers
Polyamide
PG-/metric thread





RoHS

Materijal:
poliamid 25% ojačan staklenim vlaknima

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: PG / metrički
- unutarnji navoj: PG / metrički

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
Polyamide 25% glassfiber reinforced

Temperature range:
-30°C to 120°C


Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: PG / metric
- Internal thread: PG / metric

Applications:
- Machines and apparatus construction
- Housings

vanjski navoj (Ø M/PG1) External thread (Ø M/PG1)	unutarnji navoj (Ø M/PG2) Internal thread (Ø M/PG2)	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG /PG									
PG 7	PG 9	709PA	19,0	7,0	20,0	7004200	-	-	100
PG 9	PG 11	911PA	22,0	8,0	23,0	7004201	-	-	100
PG 11	PG 13,5	1113PA	24,0	8,0	23,0	7004202	-	-	100
PG 13,5	PG 16	1316PA	27,0	9,0	26,0	7004203	-	-	100
PG 16	PG 21	1621PA	32,0	9,0	29,0	7004204	-	-	100
PG 21	PG 29	2129PA	42,0	10,0	32,0	7004205	-	-	50
PG 29	PG 36	2936PA	53,0	11,0	35,5	7004206	-	-	25
PG 36	PG 42	3642PA	60,0	13,0	40,5	7004207	-	-	10
PG 42	PG 48	4248PA	65,0	13,0	41,0	7004208	-	-	10
metrički / metric									
M 12 x 1,5	M 16 x 1,5	AMP 12/16	20,0	8,0	18,5	7004300	7004310	7004320	50
M 16 x 1,5	M 20 x 1,5	AMP 16/20	24,0	8,0	20,0	7004301	7004311	7004321	50
M 20 x 1,5	M 25 x 1,5	AMP 20/25	30,0	9,0	22,0	7004302	7004312	7004322	50
M 25 x 1,5	M 32 x 1,5	AMP 25/32	36,0	10,0	24,0	7004303	7004313	7004323	20
M 32 x 1,5	M 40 x 1,5	AMP 32/40	44,0	11,0	26,0	7004304	7004314	7004324	20
M 40 x 1,5	M 50 x 1,5	AMP 40/50	55,0	12,0	28,0	7004305	7004315	7004325	20
M 50 x 1,5	M 63 x 1,5	AMP 50/63	70,0	13,0	31,5	7004306	7004316	7004326	10

Proširenje
mesing niklani
PG-navoj

Enlargers
nickel-plated brass
PG-thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: PG
- okruglo

Svojstva:
- PG prema „starom“ DIN 46 320

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: PG
- Internal thread: PG
- round

Characteristics:
- PG acc. to „old“ DIN 46 320

Applications:
- Machines and apparatus construction
- Housings

3.3

vanjski navoj (Ø PG1) External thread (Ø PG1)	unutarnji navoj (Ø PG2) Internal thread (Ø PG2)	tip Type	promjer (D) mm Diameter (D) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
prema „starom“ DIN 46320 / acc. to „old“ DIN 46320							
PG 7	PG 9	70009	17,0	5,0	15,0	6200010	50
PG 9	PG 11	90011	20,0	6,0	16,5	6200028	50
PG 9	PG 13,5	90135	22,0	6,0	17,5	6200036	50
PG 11	PG 13,5	11135	22,0	6,0	17,5	6200044	50
PG 11	PG 16	11016	24,0	6,0	18,5	6200052	25
PG 13,5	PG 16	13516	24,0	6,5	19,0	6200060	25
PG 13,5	PG 21	13521	30,0	6,5	21,0	6200079	20
PG 16	PG 21	16021	30,0	6,5	21,0	6200087	20
PG 21	PG 29	21029	39,0	7,0	23,0	6200095	15
PG 29	PG 36	29036	50,0	8,0	28,0	6200109	10
PG 36	PG 42	36042	57,0	9,0	31,0	6200117	10
PG 42	PG 48	42048	64,0	10,0	33,0	6200125	10

Proširenje
mesing niklani
metrički navoj

Enlargers
nickel-plated brass
metric thread


okruglo / round


šesterokutno / hexagon

RoHS

Materijal:
mesing niklani


Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: metrički
- okruglo
- šesterokutno

Upotreba:
- izrada strojeva i aparata
- kućišta


Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: metric
- Internal thread: metric
- round
- hexagon

Applications:
- Machines and apparatus construction
- Housings



vanjski navoj (Ø M1) External thread (Ø M1)	unutarnji navoj (Ø M2) Internal thread (Ø M2)	tip Type	promjer (D) mm Diameter (D) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
okruglo / round							
M 12 x 1,5	M 16 x 1,5	M12/M16 RD	18,0	5,0	15,0	6200212	50
M 16 x 1,5	M 20 x 1,5	M16/M20 RD	22,0	6,0	17,5	6200216	50
M 20 x 1,5	M 25 x 1,5	M20/M25 RD	27,0	6,5	19,0	6200220	50
M 25 x 1,5	M 32 x 1,5	M25/M32 RD	34,0	8,0	20,5	6200225	20
M 32 x 1,5	M 40 x 1,5	M32/M40 RD	42,0	7,0	23,0	6200232	20
M 40 x 1,5	M 50 x 1,5	M40/M50 RD	53,0	9,0	31,0	6200240	10
M 50 x 1,5	M 63 x 1,5	M50/M63 RD	65,0	9,5	24,0	6200250	5
M 63 x 1,5	M 75 x 1,5	M63/M75 RD	80,0	10,5	26,0	6200263	1



vanjski navoj (Ø M1) External thread (Ø M1)	unutarnji navoj (Ø M2) Internal thread (Ø M2)	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla bez O-brtve Art. no. without O-ring	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
šesterokutno / hexagon								
M10 x 1,5	M12 x 1,5	M10/M12	14,0	7,0	19,0	6200310	6200410	50
M12 x 1,5	M16 x 1,5	M12/M16	19,0	7,0	19,0	6200312	6200412	50
M16 x 1,5	M20 x 1,5	M16/M20	22,0	7,0	19,0	6200316	6200416	50
M20 x 1,5	M25 x 1,5	M20/M25	28,0	7,0	20,0	6200320	6200420	50
M25 x 1,5	M32 x 1,5	M25/M32	36,0	8,0	21,5	6200325	6200425	20
M32 x 1,5	M40 x 1,5	M32/M40	42,0	8,5	22,0	6200332	6200432	20
M40 x 1,5	M50 x 1,5	M40/M50	52,0	8,5	23,0	6200340	6200440	10
M50 x 1,5	M63 x 1,5	M50/M63	65,0	9,5	25,0	6200350	6200450	5
M63 x 1,5	M75 x 1,5	M63/M75	80,0	10,5	27,5	6200363	6200463	1

Međukomad
mesing niklani
metrički navoj

Intermediate Parts
nickel-plated brass
metric thread



šesterokutni / hexagon

RoHS

Materijal:
mesing niklani


Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: metrički
- okrugli
- šesterokutni

Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: metric
- Internal thread: metric
- round
- hexagon

Applications:
- Machines and apparatus construction
- Housings



vanjski navoj (Ø M1) External thread (Ø M1)	unutarnji navoj (Ø M2) Internal thread (Ø M2)	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
šesterokutni / hexagon						
M 12 x 1,5	M 12 x 1,5	14,0	5,0	15,0	6604770	100
M 16 x 1,5	M 16 x 1,5	18,0	6,0	17,0	6604771	50
M 20 x 1,5	M 20 x 1,5	22,0	6,0	18,0	6604772	50
M 25 x 1,5	M 25 x 1,5	27,0	7,0	19,0	6604773	50
M 32 x 1,5	M 32 x 1,5	34,0	7,0	19,0	6604774	20
M 40 x 1,5	M 40 x 1,5	42,0	8,0	25,0	6604775	10
M 50 x 1,5	M 50 x 1,5	52,0	9,0	28,0	6604776	5
M 63 x 1,5	M 63 x 1,5	65,0	9,0	30,0	6604777	1

Međukomad
mesing niklani
PG-navoj

Intermediate Parts
nickel-plated brass
PG-thread



šesterokutni / hexagon

RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: PG
- okrugla
- šesterokutni
- dugi navoj (15 mm) raspoloživ na upit

Svojstva:
- PG prema „starom“ DIN 46 320


Upotreba:
- izrada strojeva i aparata
- kućišta

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: PG
- Internal thread: PG
- round
- hexagon
- long thread (15 mm) available on request

Characteristics:
- PG acc. to „old“ DIN 46 320

Applications:
- Machines and apparatus construction
- Housings



vanjski navoj (Ø PG1) External thread (Ø PG1)	unutarnji navoj (Ø PG2) Internal thread (Ø PG2)	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
šesterokutni / hexagon							
PG 7	PG 7	7007	14,0	5,0	15,0	6606075	1
PG 9	PG 9	9007	17,0	6,0	16,5	6606091	1
PG 11	PG 11	1107	20,0	6,0	17,0	6606113	1
PG 13,5	PG 13,5	1357	22,0	6,5	19,0	6606130	1
PG 16	PG 16	1607	24,0	6,5	20,0	6606164	1
PG 21	PG 21	2107	30,0	7,0	22,0	6606210	1
PG 29	PG 29	2907	40,0	8,0	24,5	6606296	1
PG 36	PG 36	3607	50,0	9,0	28,5	6606369	1
PG 42	PG 42	4207	57,0	10,0	32,0	6606423	1
PG 48	PG 48	4807	64,0	10,0	33,0	6606482	1

Međukomad
mesing niklani
PG-/metrički navoj

Intermediate Parts
nickel-plated brass
PG-/metric thread

oblik A / Form A



oblik B / Form B



RoHS

Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: metrički
- šesterokutni


Upotreba:
kao adapter za prijelaz sa PG na metrički navoj
- izrada strojeva i aparata
- kućišta


Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- Internal thread: metric
- hexagon

Applications:
as adapter between PG and metric thread
- Machines and apparatus construction
- Housings





vanjski navoj External thread	unutarnji navoj Internal thread	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla bez O-brtve Art. no. without O-ring	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
oblik A / Form A								
PG 7	M 12 x 1,5	0712	17,0	6,5	16,5	6604807	-	50
PG 7	M 16 x 1,5	0716	19,0	6,5	16,5	6604808	-	50
PG 9	M 16 x 1,5	0916	19,0	6,5	16,5	6604810	6604863	50
PG 9	M 20 x 1,5	0920	22,0	6,5	18,5	6604811	-	50
PG 11	M 20 x 1,5	1120	22,0	7,0	17,0	6604813	-	50
PG 11	M 25 x 1,5	1125	27,0	7,0	18,0	6604814	-	50
PG 13,5	M 20 x 1,5	1320	24,0	7,0	17,0	6604816	6604869	50
PG 13,5	M 25 x 1,5	1325	27,0	7,0	18,0	6604817	-	50
PG 16	M 20 x 1,5	1620	27,0	7,0	16,0	6604818	-	50
PG 16	M 25 x 1,5	1625	27,0	7,0	18,0	6604819	6604872	50
PG 16	M 32 x 1,5	1632	36,0	7,0	18,5	6604820	-	50
PG 21	M 32 x 1,5	2132	36,0	8,0	19,5	6604822	6604875	20
PG 21	M 40 x 1,5	2140	42,0	8,0	19,5	6604823	-	20
PG 29	M 40 x 1,5	2940	42,0	8,5	20,0	6604831	6604879	20
PG 29	M 50 x 1,5	2950	55,0	8,5	21,0	6604832	-	20
PG 36	M 50 x 1,5	3650	55,0	8,5	21,0	6604837	6604882	10
PG 42	M 63 x 1,5	4263	65,0	10,0	23,5	6604843	-	5
PG 48	M 63 x 1,5	4863	65,0	10,0	24,5	6604849	-	5
PG 48	M 75 x 1,5	4875	80,0	10,0	24,5	6604850	-	5
oblik B / Form B								
PG 9	M 12 x 1,5	0912	19,0	6,5	10,0	6604809	-	50
PG 11	M 16 x 1,5	1116	22,0	7,0	11,0	6604812	6604865	50
PG 13,5	M 16 x 1,5	1316	24,0	7,0	11,0	6604815	-	50
PG 21	M 25 x 1,5	2125	32,0	8,0	13,0	6604821	-	20
PG 29	M 25 x 1,5	2925	40,0	8,5	14,0	6604829	6604877	20
PG 29	M 32 x 1,5	2932	40,0	8,5	14,0	6604830	-	20
PG 36	M 40 x 1,5	3640	55,0	8,5	15,0	6604836	-	10
PG 42	M 50 x 1,5	4250	58,0	10,0	16,5	6604842	-	5
PG 48	M 50 x 1,5	4850	65,0	10,0	17,0	6604848	-	5

Međukomad
mesing niklani
metrički/PG-navoj

Intermediate Parts
nickel-plated brass
metric/PG-thread

oblik A / Form A



oblik B / Form B



RoHS

Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: PG
- šesterokutni


Upotreba:
kao adapter za prijelaz sa metričkog na PG-navoj
- izrada strojeva i aparata
- kućišta


Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- Internal thread: PG
- hexagon

Applications:
as adapter between metric and PG-thread
- Machines and apparatus construction
- Housings






vanjski navoj External thread	unutarnji navoj Internal thread	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla bez O-brtve Art. no. without O-ring	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
oblik A / Form A								
M 12 x 1,5	PG 7	1207	14,0	7,0	17,0	6604712	6604658	100
M 16 x 1,5	PG 9	1609	18,0	7,0	17,5	6604716	6604660	50
M 16 x 1,5	PG 11	1611	20,0	7,0	18,0	6604715	6604661	50
M 16 x 1,5	PG 13	1613	22,0	7,0	19,5	6604709	6604662	50
M 16 x 1,5	PG 16	1616	24,0	7,0	21,5	6604717	6604663	50
M 20 x 1,5	PG 11	2011	22,0	7,0	18,0	6604720	6604666	50
M 20 x 1,5	PG 13	2013	22,0	7,0	19,5	6604721	6604664	50
M 20 x 1,5	PG 16	2016	24,0	7,0	20,5	6604722	6604667	50
M 20 x 1,5	PG 21	2021	32,0	7,0	22,5	6604708	6604668	50
M 25 x 1,5	PG 16	2516	27,0	8,0	21,5	6604726	6604669	50
M 25 x 1,5	PG 21	2521	32,0	8,0	23,0	6604725	6604670	50
M 25 x 1,5	PG 29	2529	40,0	8,0	25,0	6604727	6604676	20
M 32 x 1,5	PG 21	3221	34,0	8,5	23,5	6604729	6604672	20
M 32 x 1,5	PG 29	3229	40,0	8,5	25,0	6604732	6604681	10
M 40 x 1,5	PG 29	4029	42,0	8,5	25,0	6604734	6604675	10
M 40 x 1,5	PG 36	4036	50,0	8,5	28,0	6604740	6604685	10
M 50 x 1,5	PG 36	5036	52,0	9,5	29,0	6604742	6604678	10
M 50 x 1,5	PG 42	5042	58,0	9,5	31,5	6604750	6604689	5
M 63 x 1,5	PG 42	6342	65,0	10,5	32,5	6604752	6604692	1
M 63 x 1,5	PG 48	6348	65,0	10,5	32,5	6604763	6604694	1
M 75 x 1,5	PG 48	7548	80,0	11,5	34,5	6604764	6604695	1
oblik B / Form B								
M 16 x 1,5	PG 7	1607	18,0	7,0	10,5	6604713	6604659	100
M 20 x 1,5	PG 9	2009	22,0	7,0	11,0	6604719	6604665	50
M 25 x 1,5	PG 9	2509	27,0	8,0	12,0	6604707	6604674	50
M 25 x 1,5	PG 11	2511	27,0	8,0	12,0	6604723	6604671	50
M 25 x 1,5	PG 13,5	2513	27,0	8,0	12,0	6604724	6604673	50
M 32 x 1,5	PG 13,5	3213	34,0	8,5	12,5	6604706	6604677	20
M 32 x 1,5	PG 16	3216	34,0	8,5	12,5	6604728	6604679	20
M 32 x 1,5	PG 21	3221	34,0	8,5	12,5	6604730	6604680	20
M 40 x 1,5	PG 16	4016	42,0	8,5	13,5	6604705	6604682	10
M 40 x 1,5	PG 21	4021	42,0	8,5	13,5	6604733	6604683	10
M 40 x 1,5	PG 29	4029	42,0	8,5	13,5	6604735	6604684	20
M 50 x 1,5	PG 21	5021	52,0	9,5	15,5	6604704	6604686	10
M 50 x 1,5	PG 29	5029	52,0	9,5	15,5	6604741	6604687	10
M 50 x 1,5	PG 36	5036	52,0	9,5	15,5	6604743	6604688	10
M 63 x 1,5	PG 29	6329	65,0	10,5	17,5	6604703	6604690	5
M 63 x 1,5	PG 36	6336	65,0	10,5	17,5	6604751	6604691	5
M 63 x 1,5	PG 42	6342	65,0	10,5	17,5	6604753	6604693	5

Pritisni vijak
mesing niklani
PG-/metrički navoj

Pressure Screws
nickel-plated brass
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
• vanjski navoj: PG/metrički

Material:
nickel-plated brass


Colour(s)/Designs:
• External thread: PG/metric


3.3

vanjski navoj External thread	tip Type	unutarnji promjer mm Internal diameter mm	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG / PG							
PG 7	7/1	10,0	13,0	5,5	8,5	6600077	100
PG 9	9/1	12,5	15,0	6,0	9,0	6600093	100
PG 11	11/1	15,0	18,0	6,0	9,0	6600115	100
PG 13,5	13/5/1	17,0	20,0	7,5	10,5	6600131	100
PG 16	16/1	18,5	22,0	7,5	10,5	6600166	100
PG 21	21/1	24,0	28,0	8,0	11,5	6600212	100
PG 29	29/1	32,0	37,0	8,0	12,0	6600298	50
PG 36	36/1	42,0	47,0	9,5	14,0	6600360	50
PG 42	42/1	48,0	54,0	10,0	16,0	6600425	10
PG 48	48/1	52,5	60,0	11,5	17,5	6600484	5
metrički / metric							
M 12 x 1,5		8,5	13,0	5,0	8,0	6600800	100
M 16 x 1,5		12,5	16,0	6,0	9,0	6600801	50
M 20 x 1,5		16,0	20,0	7,0	10,0	6600802	50
M 25 x 1,5		21,0	25,0	7,0	10,0	6600803	50
M 32 x 1,5		28,0	32,0	7,0	10,0	6600804	20
M 40 x 1,5		35,0	40,0	10,0	14,0	6600805	10
M 50 x 1,5		45,0	50,0	10,0	14,0	6600806	5
M 63 x 1,5		57,0	64,0	14,5	18,5	6600807	1

Pritisni vijak ZD
mesing niklani
PG-/metrički navoj

Pressure Screws ZD
nickel-plated brass
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- vanjski navoj: PG/metrički

Svojstva:
- sa centralnom zaštitom od izvlačenja kabela
- vrlo široki raspon promjera kablova
- zaštita protiv savijanja
- sa dvije masivne spone od mesinga

Upotreba:
- utikači
- prekidači
- kontrolne ploče

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: PG/metric


Characteristics:
- with center-functioning strain relief
- very wide clamping range
- bending protection
- with two solid brass saddle clamps

Applications:
- Connectors
- Switches
- Control panels

vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG / PG							
PG 7	ZD 7	5,5 - 7,5	16,0	5,5	16,0	4304071	100
PG 9	ZD 9	6,5 - 9,5	19,0	8,0	19,0	4304098	50
PG 11	ZD 11	7,5 - 11,5	22,0	8,0	19,0	4304110	50
PG 13,5	ZD 13	8,5 - 13,5	24,0	6,5	18,0	4304136	50
PG 16	ZD 16	10,5 - 16,5	27,0	10,5	22,5	4304160	25
PG 21	ZD 21	12,0 - 20,5	33,0	10,0	24,0	4304217	25
PG 29	ZD 29	19,0 - 29,5	42,0	10,0	24,0	4304292	10
PG 36	ZD 36	24,0 - 36,5	52,0	9,5	26,0	4304365	10
PG 42	ZD 42	33,0 - 42,5	60,0	10,0	26,5	4304420	5
PG 48	ZD 48	36,0 - 47,5	64,0	11,0	27,5	4304489	5
metrički / metric							
M 12 x 1,5	ZD M12	5,5 - 7,5	16,0	5,5	16,0	4304512	100
M 16 x 1,5/9	ZD M16/9	6,5 - 9,5	19,0	8,0	19,0	4304516	50
M 16 x 1,5/11	ZD M16/11	7,5 - 11,5	22,0	8,0	19,0	4304517	50
M 20 x 1,5/13	ZD M20/13	8,5 - 13,5	24,0	6,5	18,0	4304520	50
M 20 x 1,5/16	ZD M20/16	9,5 - 15,5	27,0	10,5	22,5	4304521	25
M 25 x 1,5	ZD M25	12,0 - 20,5	33,0	10,0	24,0	4304525	25
M 32 x 1,5	ZD M32	18,0 - 27,5	42,0	10,0	24,0	4304532	10

Pritisni vijak DZB
mesing niklani
PG-/metrički navoj

Pressure Screws DZB
nickel-plated brass
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
- vanjski navoj: PG/metrički

Svojstva:
- sa zaštitom od izvlačenja kabela i zaštitom od savijanja
- vrlo široki raspon promjera kablova
- sa sponama od mesinga

Upotreba:
- utikači
- prekidači
- kontrolne ploče

Material:
nickel-plated brass

Colour(s)/Designs:
- External thread: PG/metric

Characteristics:
- with strain relief and bending protection
- very wide clamping range
- with solid brass saddle clamps


Applications:
- Connectors
- Switches
- Control panels


3.3

vanjski navoj External thread	tip Type	za kabel promjera mm Clamping range mm	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina mm Complete length mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG / PG							
PG 9	DZB 9	6,0 - 9,0	22,0	6,0	20,0	4306090	100
PG 11	DZB 11	8,0 - 11,5	24,0	6,0	21,0	4306112	100
PG 13,5	DZB 13	9,0 - 13,0	28,0	6,5	22,0	4306139	50
PG 16	DZB 16	10,0 - 15,0	30,0	6,5	23,0	4306163	50
PG 21	DZB 21	14,0 - 20,0	38,0	7,0	25,0	4306210	50
PG 29	DZB 29	19,0 - 30,0	50,0	8,5	27,0	4306295	50
metrički / metric							
M 16 x 1,5/9	DZB M16/9	6,0 - 9,0	22,0	6,0	20,0	4306316	50
M 16 x 1,5/11	DZB M16/11	8,0 - 11,5	24,0	6,0	21,0	4306317	50
M 20 x 1,5/13	DZB M20/13	9,0 - 13,0	28,0	6,5	22,0	4306320	50
M 20 x 1,5/16	DZB M20/16	10,0 - 15,0	30,0	6,5	23,0	4306321	50
M 25 x 1,5	DZB M25	14,0 - 20,0	38,0	7,0	25,0	4306325	20
M 32 x 1,5	DZB M32	17,0 - 28,0	50,0	8,5	27,0	4306332	20

Pritisni vijak ZED
mesing niklani
PG-/metrički navoj

Pressure Screws ZED
nickel-plated brass
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
• vanjski navoj: PG/metrički

Svojstva:
• sa zaštitom od izvlačenja kabela
• sa sponama od mesinga

Upotreba:
• utikači
• prekidači
• kontrolne ploče

Material:
nickel-plated brass

Colour(s)/Designs:
• External thread: PG/metric


Characteristics:
• with strain relief
• with solid brass saddle clamps

Applications:
• Connectors
• Switches
• Control panels

vanjski navoj External thread	tip Type	za kabel promjera (K) mm Clamping range (K) mm	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina mm Complete length mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG / PG							
PG 7	ZED 607	6,0 - 9,5	17,0	5,5	19,0	4307003	100
PG 9	ZED 609	6,0 - 9,5	17,0	5,5	19,0	4307011	100
PG 11	ZED 710	7,0 - 11,5	20,0	6,5	20,0	4307020	100
PG 13,5	ZED 1014	9,0 - 13,0	22,0	6,5	20,5	4307038	50
PG 16	ZED 1015	10,0 - 15,0	24,0	6,5	20,5	4307046	50
PG 21	ZED 1418	13,0 - 20,0	30,0	7,5	21,5	4307054	50
PG 29	ZED 2027	20,0 - 29,0	40,0	8,5	24,0	4307062	50
metrički / metric							
M 12 x 1,5	ZED M12	6,0 - 8,0	17,0	7,0	20,5	4307612	50
M 16 x 1,5/9	ZED M16/9	6,0 - 9,5	17,0	7,0	20,5	4307616	50
M 16 x 1,5/11	ZED M16/11	7,0 - 11,5	20,0	7,0	20,5	4307617	50
M 20 x 1,5/13	ZED M20/13	9,0 - 13,0	22,0	7,0	21,0	4307620	50
M 20 x 1,5/16	ZED M20/16	10,0 - 15,0	24,0	7,0	21,0	4307621	50
M 25 x 1,5	ZED M25	13,0 - 20,0	30,0	8,0	22,0	4307625	20
M 32 x 1,5	ZED M32	19,0 - 27,0	40,0	8,5	24,0	4307632	20

Čep
polikarbonat
šesterokutni
PG-navoj

Plugs
Polycarbonate
hexagon
PG-thread





RoHS

Materijal:
polikarbonat

Radna temperatura:
-40°C do 135°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: PG
- šesterokutan, sa prorezom

Upotreba:
- razvodni ormari
- spojne kutije
- priključne kutije

Material:
Polycarbonate

Temperature range:
-40°C to 135°C

Colour(s)/Designs:
- light grey
- External thread: PG
- hexagon, with slot


Applications:
- Switch cabinet building
- Junction box
- Connection box

3.3

vanjski navoj External thread	Tip Type	SW mm SW mm	duljina navoja (L) mm Thread length (L) mm	ukupna duljina (E) mm Complete length (E) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	JP kom. PU pcs.
PG 7	BOU 7M	15,0	6,5	10,0	7002076	50
PG 9	BOU 9M	19,0	7,0	10,5	7002092	50
PG 11	BOU 11M	22,0	8,0	11,5	7002114	100
PG 13,5	BOU 13M	24,0	9,0	12,5	7002130	50
PG 16	BOU 16M	27,0	9,0	12,5	7002165	50
PG 21	BOU 21M	32,0	10,0	14,5	7002211	20
PG 29	BOU 29M	41,0	12,0	18,0	7002297	25
PG 36	BOU 36M	55,0	14,0	21,5	7002360	10
PG 42	BOU 42M	60,0	15,5	24,5	7002424	1
PG 48	BOU 48M	65,0	16,0	26,0	7002483	1

Čep
poliamid
okrugli
PG-/metrički navoj

Plugs
Polyamide
round
PG-/metric thread





RoHS

Materijal:
poliamid
25 % ojačan staklenim vlaknima

Radna temperatura:
-30°C do 120°C

Boje/izvedbe:
- svjetlosiva, srebrnosiva, crna
- vanjski navoj: PG/metrički
- okrugli, sa prorezom

Upotreba:
- razvodni ormari
- spojne kutije
- priključne kutije

Material:
Polyamide
25 % glassfiber reinforced

Temperature range:
-30°C to 120°C


Colour(s)/Designs:
- light grey, silver grey, jet black
- External thread: PG/metric
- round, with slot


Applications:
- Switch cabinet building
- Junction box
- Connection box

vanjski navoj External thread	promjer mm Diameter mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art. no. light grey RAL 7035	broj artikla srebrnosiva RAL 7001 Art. no. silver grey RAL 7001	broj artikla crna RAL 9005 Art. no. jet black RAL 9005	JP kom. PU pcs.
PG / PG							
PG 7	15,0	6,0	8,0	7215517	-	-	100
PG 9	19,0	6,0	9,0	7215525	-	-	100
PG 11	22,0	6,0	9,0	7215533	-	-	100
PG 13,5	25,0	6,0	9,5	7215541	-	-	100
PG 16	27,0	6,0	9,5	7215550	-	-	100
PG 21	33,0	8,0	11,0	7215568	-	-	100
PG 29	44,0	8,0	12,0	7215576	-	-	100
PG 36	55,0	10,0	15,0	7215584	-	-	50
PG 42	62,0	10,0	16,0	7215592	-	-	50
PG 48	69,0	12,0	18,5	7215606	-	-	50
metrički / metric							
M 12 x 1,5	16,0	6,0	8,0	7217312	7217412	7217512	50
M 16 x 1,5	20,0	6,0	8,0	7217316	7217416	7217516	50
M 20 x 1,5	26,0	8,0	10,5	7217320	7217420	7217520	50
M 25 x 1,5	32,0	8,0	11,0	7217325	7217425	7217525	20
M 32 x 1,5	40,0	10,0	13,5	7217332	7217432	7217532	20
M 40 x 1,5	48,0	10,0	14,0	7217340	7217440	7217540	20
M 50 x 1,5	55,0	12,0	17,0	7217350	7217450	7217550	10
M 63 x 1,5	70,0	12,0	18,0	7217363	7217463	7217563	5

Čep
mesing niklani
okrugli
PG-/metrički/plinski navoj

Plugs
nickel-plated brass
round
PG-/metric/Gas thread





RoHS

Materijal:
mesing niklani

Radna temperatura:
-40°C do 135°C

Boje/izvedbe:
• vanjski navoj: PG/metrički/plinski

Svojstva:
• okrugli, sa prorezom

Upotreba:
• izrada strojeva i aparata
• proizvodnja elektromotora

Material:
nickel-plated brass

Temperature range:
-40°C to 135°C

Colour(s)/Designs:
• External thread: PG/metric/Gas

Characteristics:
• round, with slot

Applications:
• Machine and apparatus construction
• Drives


3.3

vanjski navoj External thread	tip Type	promjer mm Diameter mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla bez O-brtve Art. no. without O-ring	JP kom. PU pcs.
PG / PG						
PG 7	7006	14,0	5,0	7,0	6700071	50
PG 9	9006	17,0	6,0	8,0	6700098	50
PG 11	1106	20,0	6,0	8,0	6700110	50
PG 13,5	1356	22,0	6,5	8,5	6700136	50
PG 16	1606	24,0	6,5	9,0	6700160	50
PG 21	2106	30,0	7,0	10,0	6700217	20
PG 29	2906	39,0	8,0	11,0	6700292	20
PG 36	3606	50,0	9,0	14,0	6700365	10
PG 42	4206	57,0	10,0	15,0	6700420	10
PG 48	4806	64,0	10,0	15,0	6700489	10
metrički / metric						
M 12 x 1,5	1236	14,0	5,0	7,0	6701612	50
M 16 x 1,5	1636	18,0	6,0	8,0	6701616	50
M 20 x 1,5	2036	22,0	6,5	8,5	6701620	50
M 25 x 1,5	2536	27,0	7,0	10,0	6701625	50
M 32 x 1,5	3236	34,0	8,0	11,0	6701632	50
M 40 x 1,5	4036	44,0	9,0	13,0	6701640	50
M 50 x 1,5	5036	54,0	10,0	14,5	6701650	10
M 63 x 1,5	6336	67,0	10,0	15,0	6701663	10
plinski / Gas						
R 3/8"	3806	17,0	6,0	9,0	6701388	50
R 1/2"	1206	22,0	6,5	9,5	6701124	50
R 5/8"	5806	24,0	6,5	9,5	6701582	25
R 3/4"	3406	28,0	7,0	10,0	6701345	25
R 1"	1006	35,0	8,0	12,0	6701108	10
R 1 1/4"	1146	44,0	8,5	13,0	6701140	10
R 1 1/2"	1126	50,0	9,0	15,0	6701116	10
R 2"	2006	64,0	10,0	16,0	6701205	10

Čep
mesing niklani
sa montiranom O-brtvom
okrugli
PG-/metrički navoj

Plugs
nickel-plated brass
with pre-mounted O-ring
round
PG-/metric thread

RoHS | IP 68





Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- vanjski navoj: PG/metrički
- okrugli, sa prorezom

Upotreba:
- izrada strojeva i aparata
- proizvodnja elektromotora

Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: PG/metric
- round, with slot


Applications:
- Machine and apparatus construction
- Drives

vanjski navoj External thread	tip Type	promjer mm Diameter mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
PG / PG						
PG 7	7006 Hi	14,0	5,0	8,0	6700507	50
PG 9	9006 Hi	17,0	6,0	9,0	6700509	50
PG 11	1106 Hi	20,0	6,0	9,0	6700511	50
PG 13,5	1356 Hi	22,0	6,5	9,5	6700513	50
PG 16	1606 Hi	24,0	6,5	9,5	6700516	25
PG 21	2106 Hi	30,0	7,0	11,0	6700521	25
PG 29	2906 Hi	39,0	8,0	12,0	6700529	20
PG 36	3606 Hi	50,0	9,0	15,0	6700536	10
PG 42	4206 Hi	57,0	10,0	16,0	6700542	10
PG 48	4806 Hi	64,0	10,0	16,0	6700548	10
metrički / metric						
M 12 x 1,5	1206 Hi	14,0	5,0	7,0	6700612	50
M 16 x 1,5	1606 Hi	18,0	6,0	8,0	6700616	100
M 20 x 1,5	2006 Hi	22,0	6,5	8,5	6700620	50
M 25 x 1,5	2556 Hi	27,0	7,0	10,0	6700625	100
M 32 x 1,5	3206 Hi	34,0	8,0	11,0	6700632	50
M 40 x 1,5	4006 Hi	44,0	9,0	13,0	6700640	50
M 50 x 1,5	5006 Hi	54,0	10,0	14,5	6700650	25
M 63 x 1,5	6306 Hi	67,0	10,0	15,0	6700663	25

Čep
šesterokutni
mesing niklani
PG-/metrički navoj

Plugs
hexagon
nickel-plated brass
PG-/metric thread





mit O-Ring / with O-ring

MS | IP 68

Materijal:
mesing niklani
O-brtva: nitril

Radna temperatura:
-25°C do 120°C


Boje/izvedbe:
- vanjski navoj: PG/metrički
- šesterokutni, sa prorezom
- dostupan i u izvedbi od nehrđajućeg čelika M12 - M63


Material:
nickel-plated brass
O-ring: Nitrile

Temperature range:
-25°C to 120°C

Colour(s)/Designs:
- External thread: PG/metric
- Round, with slot
- Also available in stainless steel M12 - M63

3.3







vanjski navoj External thread	tip Type	SW mm SW mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla sa O-brtvom Art. no. with O-ring	JP kom. PU pcs.
PG / PG						
PG 7	4607	14,0	5,0	8,0		50
PG 9	4609	17,0	6,0	9,0		50
PG 11	4611	19,0	6,0	9,0		50
PG 13,5	4613	21,0	6,5	9,5		50
PG 16	4616	23,0	6,5	9,5		25
PG 21	4621	29,0	7,0	11,0		20
PG 29	4629	39,0	8,0	12,0		15
PG 36	4636	50,0	9,0	14,0		10
PG 42	4642	58,0	10,0	15,0		10
PG 48	4648	64,0	10,0	16,0		10
metrički bez proreza / metric without Slot						
M 12 x 1,5		14,0	7,0	10,0	6702835	50
M 16 x 1,5		17,0	7,0	10,0	6702836	50
M 20 x 1,5		23,0	7,5	10,0	6702837	50
M 25 x 1,5		29,0	8,0	11,5	6702838	20
M 32 x 1,5		39,0	8,5	12,5	6702839	20
M 40 x 1,5		45,0	8,5	12,5	6702840	20
M 50 x 1,5		58,0	9,5	14,5	6702850	10
M 63 x 1,5		70,0	10,5	17,5	6702863	5

Prirubnica kutna 90°
poliamid
PG-/metrički navoj

Flange angle 90°
Polyamide
PG-/metric thread





RoHS | IP 68

Materijal:
poliamid 6

Radna temperatura:
-20°C do 100°C

Boje/izvedbe:
- siva RAL 7032
- spojni navoj: PG/metrički

Material:
Polyamide 6


Temperature range:
-20°C to 100°C


Colour(s)/Designs:
- grey RAL 7032
- Connecting thread: PG/metric

spojni navoj Connecting thread	tip Type	B mm B mm	G mm G mm	L mm L mm	E mm E mm	F mm F mm	visina (H) mm Height (H) mm	broj artikla siva Art. no. grey	JP kom. PU pcs.
PG / PG									
PG 9	FWK 9	45,0	15,5	50,0	37,0	4,5	29,0	7302096	10
PG 11	FWK 11	45,0	15,0	50,0	37,0	4,5	29,0	7302118	10
PG 13,5	FWK 13	53,0	20,0	56,0	44,0	5,5	35,0	7302134	10
PG 16	FWK 16	53,0	20,0	56,0	44,0	5,5	35,0	7302169	10
PG 21	FWK 21	68,0	24,0	68,0	55,0	5,5	43,0	7302215	5
PG 29	FWK 29	70,0	26,0	74,0	60,0	5,5	52,0	7302290	5
PG 36	FWK 36	88,0	34,0	93,0	72,0	6,5	68,0	7302363	2
metrički / metric									
M 16 x 1,5	FW 216	45,0	15,5	50,0	37,0	4,5	29,0	7302416	10
M 20 x 1,5	FW 220	53,0	20,0	56,0	44,0	5,5	35,0	7302420	10
M 25 x 1,5	FW 225	68,0	24,0	68,0	55,0	5,5	43,0	7302425	10
M 32 x 1,5	FW 232	70,0	26,0	74,0	60,0	5,5	52,0	7302432	5
M 40 x 1,5	FW 240	70,0	26,0	74,0	60,0	5,5	52,0	7302440	5
M 50 x 1,5	FW 250	88,0	34,0	93,0	72,0	6,5	68,0	7302450	2

Prirubnica kutna 90°
metalna
PG-/metrički navoj

Flange angle 90°
Zinc
PG-/metric thread





RoHS | IP 68

Materijal:
cink

Radna temperatura:
-30°C do 100°C

Boje/izvedbe:
- spojni navoj: PG/metrički
- kratka izvedba
- tlačni lijev

Material:
Zinc


Temperature range:
-30°C to 100°C

Colour(s)/Designs:
- Connecting thread: PG/metric
- short version
- die-casting

spojni navoj Connecting thread	tip Type	B mm B mm	G mm G mm	L mm L mm	E mm E mm	F mm F mm	visina (H) mm Height (H) mm	broj artikla cink Art. no. Zinc	JP kom. PU pcs.
PG / PG									
PG 9	9 W	45,0	15,5	48,0	37,0	4,3	30,0	6303099	10
PG 11	11 W	45,0	15,5	48,0	37,0	4,3	30,0	6303110	10
PG 13,5	13 W	53,0	19,0	56,0	44,0	5,5	35,0	6303137	10
PG 16	16 W	53,0	19,0	56,0	44,0	5,5	35,0	6303161	10
PG 21	21 W	63,0	23,0	65,0	54,0	5,5	42,0	6303218	5
PG 29	29 W	71,0	27,0	75,0	60,0	5,5	52,0	6303293	5
PG 36	36 W	89,0	34,0	94,0	72,0	6,5	69,0	6303366	5
PG 42	42 W	96,0	36,5	114,0	84,0	6,5	74,0	6303420	5
PG 48	48 W	96,0	37,0	114,0	84,0	6,5	74,0	6303480	1
metrički / metric									
M 16 x 1,5	216 W	45,0	15,5	48,0	37,0	4,3	30,0	6303516	10
M 20 x 1,5	220 W	53,0	18,0	56,0	44,0	5,5	35,0	6303520	10
M 25 x 1,5	225 W	63,0	22,5	65,0	54,0	5,5	42,0	6303525	10
M 32 x 1,5	232 W	70,0	27,0	75,0	60,0	5,5	52,0	6303532	5
M 40 x 1,5	240 W	71,0	27,0	75,0	60,0	5,5	52,0	6303540	5
M 50 x 1,5	250 W	89,0	33,5	93,0	72,0	6,5	69,0	6303550	2
M 63 x 1,5	263 W	96,0	37,0	114,0	84,0	6,5	74,0	6303563	2

Koljeno 90°
sa O-brtvom i maticom metrički navoj

Elbow 90°
with O-ring and Lock nut metric thread





RoHS | IP 68

Materijal:
- 1: koljeno: cink, tlačni lijev, niklano
- 2: O-brtva: nitril NBR
- 3: matica: mesing niklani

Radna temperatura:
-20°C do 100°C

Boje/izvedbe:
- spojni navoj: metrički
- unutarnji navoj: metrički

Svojstva:
- matica omogućuje podešavanje u bilo kojoj poziciji

Upotreba:
- izrada strojeva i aparata
- proizvodnja elektromotora

Material:
- 1: Elbow: Zinc die-casting, nickel-plated
- 2: O-ring: Nitrile NBR
- 3: Lock nut: nickel-plated brass

Temperature range:
-20°C to 100°C

Colour(s)/Designs:
- Connecting thread: metric
- Internal thread: metric


Characteristics:
- Lock-nut allows adjustment in any position

Applications:
- Machine and apparatus construction
- Drives

spojni navoj Connecting thread	L mm L mm	SW 1 mm SW 1 mm	H mm H mm	Di mm Di mm	broj artikla cink Art. no. Zinc	JP kom. PU pcs.
M 16 x 1,5	16,0	22,0	38,0	12,2	6300240	100
M 20 x 1,5	16,0	26,0	42,0	16,0	6300241	50
M 25 x 1,5	16,5	34,0	48,5	21,0	6300242	50
M 32 x 1,5	18,5	40,0	57,5	27,6	6300243	25
M 40 x 1,5	19,0	50,0	67,0	35,0	6300244	10

Brtveni čep
LDPE glatki
sa/bez otvora
za prolaz kabela
metrički navoj

Plug Sealing clamp
LDPE smooth
with/without drilling
metric thread





RoHS | IP 54

Materijal:
LDPE glatki

Radna temperatura:
-30°C do 90°C

Boje/izvedbe:
- svjetlosiva, crna
- navoj: metrički
- zatvorena izvedba za bušenje ili probijanje
- sa otvorom (otvorena izvedba)
- šesterokutan

Upotreba:
- jednostavan ulaz kabela kad god nije potrebna zaštita od izvlačenja

Material:
LDPE smooth

Temperature range:
-30°C to 90°C

Colour(s)/Designs:
- light grey, jet black
- Thread: metric
- shutted form to bore or to puncture
- with drilling (forthrightly form)
- hexagon

Applications:
- Simple cable entry wherever no strain relief is required.


3.3


navoj (d) Thread (d)	brtveni promjer (d1) mm Sealing range (d1) mm	SW (S) mm SW (S) mm	duljina navoja (E) mm Thread length (E) mm	ukupna visina mm Complete height mm	Ø prirubnice (D) mm Ø Flange (D) mm	Ø otvora mm Ø Drilling mm	broj artikla svjetlosiva RAL 7035 bez otvora Art. no. light grey RAL 7035 without drilling	Art.-Nr. tiefschwarz RAL 9005 bez otvora Art. no. jet black RAL 9005 without drilling	JP kom. PU pcs.
M 12 x 1,5	3,5 - 5,0	10,0	8,4	15,0	15,0	4,0	7006812	7006870	50
M 16 x 1,5	5,0 - 10,0	15,0	10,0	17,0	20,0	5,5	7006816	7006871	50
M 20 x 1,5	8,0 - 13,5	19,0	12,0	20,0	24,0	8,0	7006820	7006872	50
M 25 x 1,5	9,0 - 16,0	24,0	12,0	22,0	28,0	8,5	7006825	7006873	50
M 32 x 1,5	11,0 - 22,0	30,0	14,0	25,0	37,0	10,0	7006832	7006874	25
M 40 x 1,5	17,0 - 24,0	37,0	16,0	28,0	45,0	16,0	7006840	7006875	20
M 50 x 1,5	22,0 - 35,0	46,0	18,0	31,0	55,5	20,0	7006850	7006876	10
M 63 x 1,5	24,0 - 43,0	56,0	20,0	35,0	68,5	23,0	7006863	7006877	5

navoj (d) Thread (d)	brtveni promjer (d1) mm Sealing range (d1) mm	SW (S) mm SW (S) mm	duljina navoja (E) mm Thread length (E) mm	ukupna visina mm Complete height mm	Ø prirubnice (D) mm Ø Flange (D) mm	Ø otvora mm Ø Drilling mm	broj artikla svjetlosiva RAL 7035 s otvorom Art. no. light grey RAL 7035 with drilling	JP kom. PU pcs.
M 12 x 1,5	3,5 - 5,0	10,0	8,4	15,0	15,0	4,0	7006880	50
M 16 x 1,5	5,0 - 10,0	15,0	10,0	17,0	20,0	5,5	7006881	50
M 20 x 1,5	8,0 - 13,5	19,0	12,0	20,0	24,0	8,0	7006882	50
M 25 x 1,5	9,0 - 16,0	24,0	12,0	22,0	28,0	8,5	7006883	50
M 32 x 1,5	11,0 - 22,0	30,0	14,0	25,0	37,0	10,0	7006884	25
M 40 x 1,5	17,0 - 24,0	37,0	16,0	28,0	45,0	16,0	7006885	20
M 50 x 1,5	22,0 - 35,0	46,0	18,0	31,0	55,5	20,0	7006886	10
M 63 x 1,5	24,0 - 43,0	56,0	20,0	35,0	68,5	23,0	7006887	5

O-brtva
perbunan
PG-/metrički/plinski navoj

O-rings
Perbunan
PG-/metric/Gas thread





RoHS

Materijal:
perbunan

Radna temperatura:
-25°C do 120°C

Boje/izvedbe:
- crna
- spojni navoj: PG/metrički/plinski

Upotreba:
- za sigurno brtvljenje kućišta od ulja, prašine i vode. Za spojni navoj uvodnice ili sličnih dijelova.

Material:
Perbunan

Temperature range:
-25°C to 120°C


Colour(s)/Designs:
- black
- Connecting thread: PG/metric/Gas


Applications:
- For safe sealing of housing against oil, dust and water. For connection thread of a gland or similar parts.

spojni navoj / Connecting thread			unutarnji promjer mm	debljina mm	broj artikla crna	JP kom.
PG	metrički	plinski	Internal Diameter mm	Thickness mm	Art. no. black	PU pcs.
PG 7	M 12	R 1/4"	10,0	1,5	8112070	1000
PG 9	M 16	R 3/8"	13,0	1,5	8112096	1000
PG 11			16,0	1,5	8112118	1000
PG 13,5	M 20	R 1/2"	18,0	1,5	8112134	1000
PG 16		R 5/8"	20,0	1,5	8112169	1000
PG 21			25,0	2,0	8112215	1000
	M 25	R 3/4"	21,95	1,78	8112250	100
	M 32	R 1"	28,0	2,0	8112320	100
PG 29		R 1 1/8"	33,0	2,0	8112290	1000
	M 40	R 1 1/4"	37,0	2,0	8112400	100
PG 36		R 1 1/2"	43,0	2,0	8112363	1000
	M 50	R 1 3/4"	48,0	2,0	8112500	100
PG 42			50,0	2,0	8112428	1000
PG 48	M 63	R 2"	55,0	2,0	8112630	1000
	M 75		67,65	2,62	8112675	100

Brtva plosnata
neopren
PG-/metrički navoj

Flat Sealings
Neoprene
PG-/metric thread





RoHS

Materijal:
neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- crna
- spojni navoj: PG/metrički

Upotreba:
- odgovara za PG-/metričke kabelske uvodnice, kao i za pribor

Material:
Neoprene

Temperature range:
-40°C to 100°C


Colour(s)/Designs:
- black
- Connecting thread: PG/metric


Applications:
- suitable for PG-/metric Cable Glands as well as Accessories

spojni navoj Connecting thread	tip Type	vanjski promjer (A) mm External diameter (A) mm	unutarnji promjer (I) mm Internal diameter (I) mm	debljina (S) mm Thickness (S) mm	broj artikla crna Art. no. black	JP kom. PU pcs.
PG / PG						
PG 7		17,0	11,3	1,2	8113301	100
PG 9		20,0	13,9	1,2	8113302	100
PG 11		23,0	17,1	1,2	8113303	100
PG 13,5		25,0	19,0	1,2	8113304	100
PG 16		27,0	21,0	1,2	8113305	100
PG 21		34,0	26,6	1,5	8113306	50
PG 29		45,0	35,2	1,5	8113307	50
PG 36		56,0	45,2	1,5	8113308	50
PG 42		67,0	52,2	1,5	8113309	50
PG 48		72,0	57,7	1,5	8113310	50
metrički / metric						
M 12 x 1,5	12 F	15,0	10,0	1,2	8113490	100
M 16 x 1,5	16 F	20,0	13,9	1,2	8113302	100
M 20 x 1,5	20 F	24,0	18,0	1,2	8113492	100
M 25 x 1,5	25 F	30,0	23,0	1,2	8113493	100
M 32 x 1,5	32 F	40,0	30,0	1,5	8113494	100
M 40 x 1,5	40 F	48,0	38,0	1,5	8113495	100
M 50 x 1,5	50 F	58,0	48,0	1,5	8113496	100
M 63 x 1,5	63 F	75,0	61,0	1,5	8113497	100
M 75 x 1,5	75 F	90,0	73,0	1,5	8113498	100

Brtva
neopren
obična
PG-/metrički navoj

Sealing Rings
Neoprene
plain
PG-/metric thread





RoHS

Materijal:
neopren

Radna temperatura:
-30°C do 100°C

Boje/izvedbe:
- crna
- spojni navoj: PG/metrički

Napomena:
brtve označene sa * montirane su unutar standardnih kabelskih uvodnica

Upotreba:
- odgovara za PG-/metričke konusne kabelske uvodnice

Material:
Neoprene

Temperature range:
-30°C to 100°C

Colour(s)/Designs:
- black
- Connection thread: PG/metric


Note:
(*) marked types are assembled within the standard cable glands

Applications:
- suitable for PG-/metric Conus-Cable glands

spojni navoj / Connecting thread		tip	vanjski promjer (A) mm	unutarnji promjer (I) mm	visina (H) mm	broj artikla crna obična	JP kom.
PG	metrički						
PG	metric	Type	External diameter (A) mm	Internal diameter (I) mm	Height (H) mm	Art. no. black plain	PU pcs.
PG 7	M 12	307/5	10,7	5,0	5,0	8103011	1
PG 7	M 12	307/6*	10,7	6,0	5,0	8103020	1
PG 7	M 12	307/7	10,7	7,0	5,0	8103038	1
PG 9	M 16	309/6	13,3	6,0	5,5	8103054	1
PG 9	M 16	309/7*	13,3	7,0	5,5	8103062	1
PG 9	M 16	309/8	13,3	8,0	5,5	8103070	1
PG 9	M 16	309/9	13,3	9,0	5,5	8103089	1
PG 11	M 16 - M 20	311/5	16,5	5,0	6,0	8103097	1
PG 11	M 16 - M 20	311/7	16,5	7,0	6,0	8103119	1
PG 11	M 16 - M 20	311/9*	16,5	9,0	6,0	8103127	1
PG 11	M 16 - M 20	311/10	16,5	10,0	6,0	8103135	1
PG 11	M 16 - M 20	311/11	16,5	11,0	6,0	8103143	1
PG 13,5	M 20 - M 25	313/7	18,3	7,0	6,5	8103151	1
PG 13,5	M 20 - M 25	313/9	18,3	9,0	6,5	8103160	1
PG 13,5	M 20 - M 25	313/11*	18,3	11,0	6,5	8103186	1
PG 13,5	M 20 - M 25	313/2	18,3	12,0	6,5	8103194	1
PG 16	M 20 - M 25	316/9	20,4	9,0	7,5	8103208	1
PG 16	M 20 - M 25	316/10	20,4	10,0	7,5	8103216	1
PG 16	M 20 - M 25	316/13*	20,4	13,0	7,5	8103232	1
PG 16	M 20 - M 25	316/15	20,4	15,0	7,5	8103240	1
PG 21	M 25 - M 32	321/14	25,9	14,0	8,0	8103259	1
PG 21	M 25 - M 32	321/16*	25,9	16,0	8,0	8103356	1
PG 29	M 32	329/25*	34,7	25,0	9,5	8103283	1

Brtva
neopren
višeslojna
PG-/metrički navoj

Sealing Rings
Neoprene
punchable
PG-/metric thread





RoHS

Materijal:
neopren

Radna temperatura:
-25°C do 100°C

Boje/izvedbe:
- crna
- spojni navoj: PG/metrički
- višeslojna

Svojstva:
- brtva može biti pojedinačno prilagođena različitim promjerima kabela

Upotreba:
- odgovara za PG-/metričke konusne kabelske uvodnice

Material:
Neoprene

Temperature range:
-25°C to 100°C

Colour(s)/Designs:
- black
- Connection thread: PG/metric
- punchable

Characteristics:
- Rings can be individually adapted to various cable diameters


Applications:
- suitable for PG-/metric Conus-Cable glands


3.3

spojni navoj / Connecting thread PG	metrički	tip	vanjski promjer (A) mm	Dimenzije (I) mm	visina mm	broj artikla crna višeslojna	JP kom.
PG	metric	Type	External diameter (A) mm	Grading (I) mm	Height mm	Art. no. black punchable	PU pcs.
PG 9	M 16	309 UNEO	13,3	5,0 - 7,5 - 10,0	5,5	8107092	1
PG 11	M 16 - M 20	311 UNEO	16,5	7,5 - 10,0 - 12,5	6,0	8107114	1
PG 13,5	M 20 - M 25	313 UNEO	18,3	7,5 - 10,0 - 12,5	6,0	8107130	1
PG 16	M 20 - M 25	316 UNEO	20,4	7,5 - 10,0 - 12,5 - 15,0	7,0	8107165	1
PG 21	M 25 - M 32	321 UNEO	25,9	10,0 - 13,0 - 16,0 - 19,0	8,0	8107211	1
PG 29	M 32	329 UNEO	34,7	18,0 - 21,0 - 24,0 - 27,0	9,5	8107297	1
PG 36	M 40	336 UNEO	44,7	24,0 - 27,0 - 30,0 - 33,0	12,0	8107360	1
PG 42	M 50	342 UNEO	51,7	30,0 - 33,0 - 36,0 - 39,0	14,0	8107424	1
PG 48	M 63	348 UNEO	56,9	36,0 - 39,0 - 42,0 - 45,0	14,0	8107483	1

Pritisni prsten
čelik pocinčani
PG-/metrički navoj

Pressure Rings
galvanized steel
PG-/metric thread





RoHS

Materijal:
čelik pocinčani

Boje/izvedbe:
• spojni navoj: PG/metrički

Upotreba:
• odgovara za PG-/metričke konusne kabelske uvodnice

Material:
galvanized steel


Colour(s)/Designs:
• Connecting thread: PG/metric


Applications:
• suitable for PG-/metric Conus-Cable glands

spojni navoj / Connecting thread PG	metrički	tip	vanjski promjer (A) mm	unutarnji promjer (I) mm	debljina (S) mm	broj artikla čelik pocinčani	JP kom.
PG	metric	Type	External diameter (A) mm	Internal diameter (I) mm	Thickness (S) mm	Art. no. galvanized steel	PU pcs.
PG 7	M 12	D 307/8	11,0	8,0	1,0	8110026	1
PG 9	M 16 - M 20	D 309/10	13,5	10,0	1,0	8110050	1
PG 11	M 16 - M 20	D 311/10	17,0	10,0	0,8	8110085	1
PG 11	M 16 - M 20	D 311/12	17,0	12,0	1,0	8110093	1
PG 13,5	M 20 - M 25	D 313/10	18,5	10,0	0,8	8110107	1
PG 13,5	M 20 - M 25	D 313/14	18,5	14,0	1,0	8110115	1
PG 16	M 20 - M 25	D 316/12	20,5	12,0	0,8	8110123	na upit/on request
PG 16	M 20 - M 25	D 316/16	21,0	16,0	1,0	8110131	1
PG 21	M 25 - M 32	D 321/21	26,0	21,0	1,0	8110166	1
PG 29	M 32	D 329/30	35,0	30,0	1,0	8110174	1
PG 36	M 40	D 336/38	45,0	38,0	1,0	8110182	1
PG 42	M 50	D 342/43	52,0	43,0	1,0	8110190	1
PG 48	M 63	D 348/48	57,0	48,0	1,0	8110204	1

Brtveni prsten za spojne navoje
polietilen
PG-/metrički navoj

Packing Ring for connection thread
Polyethylene
PG-/metric thread





RoHS

Materijal:
polietilen PE-LD

Radna temperatura:
-40°C do 80°C

Boje/izvedbe:
- prirodna
- spojni navoj: PG/metrički

Svojstva:
- bez halogena
- kemijska otpornost

Upotreba:
- odgovara za kabelske uvodnice, kao i za pribor

Material:
Polyethylene PE-LD

Temperature range:
-40°C to 80°C

Colour(s)/Designs:
- nature
- Connecting thread: PG/metric


Characteristics:
- halogen-free
- chemical resistance


Applications:
- suitable for cable glands as well as Accessories

spojni navoj Connecting thread	tip Type	I-Ø mm I-Ø mm	A-Ø mm I-Ø mm	debljina (S) mm Thickness (S) mm	broj artikla PE-LD Art. no. PE-LD	JP kom. PU pcs.
PG / PG						
PG 7	307 K	12,1	16,5	1,5	8115010	100
PG 9	309 K	14,8	19,0	1,5	8115028	100
PG 11	311 K	18,1	22,5	2,0	8115036	100
PG 13,5	313 K	19,8	25,0	2,0	8115044	100
PG 16	316 K	22,1	27,0	2,0	8115052	100
PG 21	321 K	27,7	34,0	2,0	8115060	100
PG 29	329 K	36,4	44,0	2,0	8115079	100
PG 36	336 K	46,4	54,0	2,0	8115087	100
PG 42	342 K	53,3	62,0	3,0	8115095	100
PG 48	348 K	58,5	69,0	3,0	8115109	100
metrički / metric						
M 12 x 1,5	3 M 12-D	12,0	16,0	2,0	8115150	1
M 16 x 1,5	3 M 16-D	16,0	20,0	2,0	8115151	1
M 20 x 1,5	3 M 20-D	20,0	24,0	2,0	8115152	1
M 25 x 1,5	3 M 25-D	25,0	29,0	2,0	8115153	1
M 32 x 1,5	3 M 32-D	32,0	36,0	2,0	8115154	1
M 40 x 1,5	3 M 40-D	40,0	45,0	2,0	8115155	1
M 50 x 1,5	3 M 50-D	50,0	56,0	2,0	8115156	1
M 63 x 1,5	3 M 63-D	63,0	70,0	2,0	8115157	1

Brtva slijepa
polietilen, siva
poliamid, bijela
PG-/metrički navoj

Dummy Discs
Polyethylene, grey
Polyamide, white
PG-/metric thread





RoHS

Materijal:
- polietilen, siva
- poliamid, bijela

Radna temperatura:
-30°C do 100°C

Boje/izvedbe:
- siva, bijela
- spojni navoj: PG/metrički


Upotreba:
- kao zaštita od prašine ispod glave kabelske uvodnice


Material:
- Polyethylene, grey
- Polyamide, white

Temperature range:
-30°C do 100°C

Colour(s)/Designs:
- grey, white
- Connecting thread: PG/metric

Applications:
- As dust protection under the cap nut of the cable gland





Boja Colour	spojni navoj Connecting thread	tip Type	vanjski promjer (A) mm External diameter (A) mm	debljina (S) mm Thickness (S) mm	broj artikla Art. no.	JP kom. PU pcs.
PG / PG						
siva / grey	PG 7	PR 7	11,0	3,0	7006207	1
siva / grey	PG 9	PR 9	13,0	3,0	7006209	1
siva / grey	PG 11	PR 11	16,5	3,0	7006211	1
siva / grey	PG 13,5	PR 13	18,5	3,0	7006213	1
siva / grey	PG 16	PR 16	20,5	3,0	7006216	1
siva / grey	PG 21	PR 21	27,0	3,0	7006255	1
siva / grey	PG 29	PR 29	35,0	3,0	7006229	1
siva / grey	PG 36	PR 36	45,0	3,0	7006236	1
siva / grey	PG 42	PR 42	52,0	3,0	7006242	1
siva / grey	PG 48	PR 48	57,0	3,0	7006248	1
metrički / metric						
siva / grey	M 12 x 1,5		11,0	3,0	7006207	1
siva / grey	M 16 x 1,5/9		13,8	3,0	7006251	1
siva / grey	M 16 x 1,5/11		17,0	3,0	7006252	1
siva / grey	M 20 x 1,5/13		19,0	3,0	7006253	1
siva / grey	M 20 x 1,5/16		20,9	3,0	7006254	1
siva / grey	M 25 x 1,5/21		26,3	3,0	7006255	1
siva / grey	M 32 x 1,5		34,8	3,0	7006256	1
siva / grey	M 40 x 1,5		43,8	3,0	7006257	1
siva / grey	M 50 x 1,5		50,3	3,0	7006258	1
siva / grey	M 63 x 1,5		59,3	3,0	7006259	1
PG / PG						
bijela / white	PG 7	BS 7	10,5		7006012	1
bijela / white	PG 9	BS 9	13,5		7006020	1
bijela / white	PG 11	BS 11	16,5		7006039	1
bijela / white	PG 13,5	BS 13	18,5		7006047	1
bijela / white	PG 16	BS 16	20,5		7006055	1
bijela / white	PG 21	BS 21	26,0		7006063	1
bijela / white	PG 29	BS 29	35,0		7006071	1
bijela / white	PG 36	BS 36	45,0		7006080	1
bijela / white	PG 42	BS 42	52,0		7006098	1
bijela / white	PG 48	BS 48	57,0		7006101	1


ATEX kabelske uvodnice
ATEX pribor

ATEX Cable glands
ATEX Accessories

	stranica		page
ATEX kabelske uvodnice plastika PA	**102 - 112**	**ATEX Cable glands Plastic PA**	**102 - 112**
S-TEC Ex e / Ex i	102 - 104	S-TEC Ex e / Ex i	102 - 104
WADI-TEC Ex e	105 - 112	WADI-TEC Ex e	105 - 112
ATEX kabelske uvodnice mesing niklani	**113 - 140**	**ATEX Cable glands nickel-plated brass**	**113 - 140**
S-TEC Ex e	113 - 114	S-TEC Ex e	113 - 114
WADI-TEC Ex e	115 - 127	WADI-TEC Ex e	115 - 127
WADI-TEC Ex e nehrđajući čelik	128 - 130	WADI-TEC Ex e Stainless steel	128 - 130
1F Ex d/e	131 - 133	1F Ex d/e	131 - 133
3F Ex d/e	134 - 136	3F Ex d/e	134 - 136
4F Ex d/e	137 - 139	4F Ex d/e	137 - 139
Kabelska prirubnica za Ex d/e	140	Clamping Bracket for Ex d/e	140
ATEX pribor	**141 - 163**	**ATEX Accessories**	**141 - 163**
Matice		Lock nuts	
mesing niklani	142	Nickel-plated brass	142
Redukcije		Reducers	
plastika PA Ex e	143	Plastic PA Ex e	143
plastika PC Ex e	144	Plastic PC Ex e	144
mesing niklani Ex e	145 - 146	Nickel-plated brass Ex e	145 - 146
mesing niklani Ex d/e	147	Nickel-plated brass Ex d/e	147
Proširenja		Enlargers	
plastika PA Ex e	148	Plastic PA Ex e	148
plastika PC Ex e	149	Plastic PC Ex e	149
mesing niklani Ex e	150 - 151	Nickel-plated brass Ex e	150 - 151
mesing niklani Ex d/e	152	Nickel-plated brass Ex d/e	152
Čepovi		Plugs	
plastika PA Ex e	153	Plastic PA Ex e	153
plastika PC Ex e	154	Plastic PC Ex e	154
mesing niklani Ex e	155 - 156	Nickel-plated brass Ex e	155- 156
Prijelazi		Adapter	
mesing niklani Ex e	157 - 160	Nickel-plated brass Ex e	157 - 160
mesing niklani Ex d/e	161 - 162	Nickel-plated brass Ex d/e	161 - 162
Brtve plosnate		Flat sealings	
neopren	163	Neoprene	163

Kabelska uvodnica
ATEX Ex e
S-TEC
poliamid
metrički navoj

Cable gland
ATEX Ex e
S-TEC
Polyamide
metric thread





RoHS | Ex | IP 68 | UL | PG | EN 50262 | IECEx | INMETRO

Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid
- 2: brtva: neopren
- 4: brtva plosnata: neopren

Radna temperatura:
M12: -20°C do 80°C
M16-M63: -35°C do 95°C

Boje/izvedbe:
- crna, plava
- vanjski navoj: metrički
- kratki/dugi navoj

Svojstva:
certifikat: LCIE 07 ATEX 6082 X
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide
- 2: Sealing: Neoprene
- 4: Flat Sealing: Neoprene

Temperature range:
M12: -20°C to 80°C
M16-M63: -35°C to 95°C

Colour(s)/Designs:
- jet black, blue
- External thread: Metric
- short/long thread

Characteristics:
Certificate: LCIE 07 ATEX 6082 X
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna, Ex e RAL 9005 Art.-No. jet black, Ex e RAL 9005	referenca SIB Katalog S. 68 Reference catalogue SIB page 68	odgovarajuće matice Lock nut	JP kom. PU pcs.
metrički, kratki navoj / metric, short thread								
M 12 x 1.5	4.0 - 6.5	8,0	15,0	32,0	5507540	F8021200E	6004121	50
M 16 x 1.5/9	5.0 - 8.0	10,0	19,0	37,0	5507541	F8021650E	6004164	50
M 16 x 1.5/11	5.0 - 10.0	10,0	22,0	39,0	5507542	F8021600E	6004164	50
M 20 x 1.5/13	7.0 - 12.0	10,0	24,0	40,0	5507543	F8022050E	6004202	50
M 20 x 1.5/16	10.0 - 14.0	10,0	27,0	43,0	5507544	F8022000E	6004202	50
M 25 x 1.5/16	10.0 - 14.0	10,0	27,0	45,0	5507545	F8022550E	6004253	20
M 25 x 1.5/21	12.0 - 18.0	10,0	33,0	49,0	5507546	F8022500E	6004253	20
M 32 x 1.5	16.0 - 25.0	10,0	42,0	52,0	5507547	F8023200E	6004326	20
M 40 x 1.5	22.0 - 32.0	10,0	53,0	62,0	5507548	F8024000E	7211990	20
M 50 x 1.5	28.0 - 38.5	12,0	60,0	67,0	5507549	F8025000E	7211991	10
M 63 x 1.5	40.0 - 48.0	12,0	70,0	68,0	5507550	F8026300E	7211992	5
metrički, dugi navoj / metric, long thread								
M 12 x 1.5	4.0 - 6.5	15,0	15,0	39,0	5507640	F8031200E	6004121	50
M 16 x 1.5/9	5.0 - 8.0	15,0	19,0	42,0	5507641	F8031650E	6004164	50
M 16 x 1.5/11	5.0 - 10.0	15,0	22,0	44,0	5507642	F8031600E	6004164	50
M 20 x 1.5/13	7.0 - 12.0	15,0	24,0	45,0	5507643	F8032050E	6004202	50
M 20 x 1.5/16	10.0 - 14.0	15,0	27,0	48,0	5507644	F8032000E	6004202	50
M 25 x 1.5/16	10.0 - 14.0	15,0	27,0	50,0	5507645	F8032550E	6004253	20
M 25 x 1.5/21	12.0 - 18.0	15,0	33,0	53,0	5507646	F8032500E	6004253	20
M 32 x 1.5	16.0 - 25.0	15,0	42,0	57,0	5507647	F8033200E	6004326	20
M 40 x 1.5	22.0 - 32.0	16,0	53,0	68,0	5507648	F8034000E	7211990	20
M 50 x 1.5	28.0 - 38.5	16,0	60,0	71,0	5507649	F8035000E	7211991	10
M 63 x 1.5	40.0 - 48.0	16,0	70,0	72,0	5507650	F8036300E	7211992	5

Kabelverschraubung ATEX Ex e S-TEC

Polyamid
metrisches Gewinde

Cable gland ATEX Ex e S-TEC

Polyamide
metric thread





RoHS | Ex | IP 68 | UL | PG | EN 50262 | IECEx | INMETRO

Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid
- 2: brtva: neopren
- 4: brtva plosnata: neopren

Radna temperatura:
M12: -20°C do 80°C
M16-M63: -35°C do 95°C

Boje/izvedbe:
- crna, plava
- vanjski navoj: metrički
- kratki/dugi navoj

Svojstva:
certifikat: LCIE 07 ATEX 6082 X
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide
- 2: Sealing: Neoprene
- 4: Flat Sealing: Neoprene

Temperature range:
M12: -20°C to 80°C
M16-M63: -35°C to 95°C

Colour(s)/Designs:
- jet black, blue
- External thread: Metric
- short/long thread


Characteristics:
Certificate: LCIE 07 ATEX 6082 X
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna, Ex e RAL 9005 Art.-No. jet black, Ex e RAL 9005	referenca SIB Katalog S. 68 Reference catalogue SIB page 68	odgovarajuće matice Lock nut	JP kom. PU pcs.
metrički, kratki navoj / metric, short thread								
M 12 x 1.5	4.0 - 6.5	8,0	15,0	32,0	5507560	F7421200E	6004121	50
M 16 x 1.5/9	5.0 - 8.0	10,0	19,0	37,0	5507561	F7421650E	6004164	50
M 16 x 1.5/11	5.0 - 10.0	10,0	22,0	39,0	5507562	F7421600E	6004164	50
M 20 x 1.5/13	7.0 - 12.0	10,0	24,0	40,0	5507563	F7422050E	6004202	50
M 20 x 1.5/16	10.0 - 14.0	10,0	27,0	43,0	5507564	F7422000E	6004202	50
M 25 x 1.5/16	10.0 - 14.0	10,0	27,0	45,0	5507565	F7422550E	6004253	20
M 25 x 1.5/21	12.0 - 18.0	10,0	33,0	49,0	5507566	F7422500E	6004253	20
M 32 x 1.5	16.0 - 25.0	10,0	42,0	52,0	5507567	F7423200E	6004326	20
M 40 x 1.5	22.0 - 32.0	10,0	53,0	62,0	5507568	F7424000E	7211990	20
M 50 x 1.5	28.0 - 38.5	12,0	60,0	67,0	5507569	F7425000E	7211991	10
M 63 x 1.5	40.0 - 48.0	12,0	70,0	68,0	5507570	F7426300E	7211992	5
metrički, dugi navoj / metric, long thread								
M 12 x 1.5	4.0 - 6.5	15,0	15,0	39,0	5507660	F7431200E	6004121	50
M 16 x 1.5/9	5.0 - 8.0	15,0	19,0	42,0	5507661	F7431650E	6004164	50
M 16 x 1.5/11	5.0 - 10.0	15,0	22,0	44,0	5507662	F7431600E	6004164	50
M 20 x 1.5/13	7.0 - 12.0	15,0	24,0	45,0	5507663	F7432050E	6004202	50
M 20 x 1.5/16	10.0 - 14.0	15,0	27,0	48,0	5507664	F7432000E	6004202	50
M 25 x 1.5/16	10.0 - 14.0	15,0	27,0	50,0	5507665	F7432550E	6004253	20
M 25 x 1.5/21	12.0 - 18.0	15,0	33,0	53,0	5507666	F7432500E	6004253	20
M 32 x 1.5	16.0 - 25.0	15,0	42,0	57,0	5507667	F7433200E	6004326	20
M 40 x 1.5	22.0 - 32.0	16,0	53,0	68,0	5507668	F7434000E	7211990	20
M 50 x 1.5	28.0 - 38.5	16,0	60,0	71,0	5507669	F7435000E	7211991	10
M 63 x 1.5	40.0 - 48.0	16,0	70,0	72,0	5507670	F7436300E	7211992	5

Kabelska uvodnica ATEX Ex e S-TEC
poliamid
NPT-navoj

Cable gland ATEX Ex e S-TEC
Polyamide
NPT-thread





RoHS | Ex | IP 68 | UL | PG | IECEx | INMETRO

Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid
- 2: brtva: neopren
- 4: brtva plosnata: neopren

Radna temperatura:
-35°C do 95°C

Boje/izvedbe:
- crna, plava
- vanjski navoj: NPT

Svojstva:

certifikat:	LCIE 07 ATEX 6082 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide
- 2: Sealing: Neoprene
- 4: Flat Sealing: Neoprene

Temperature range:
-35°C to 95°C

Colour(s)/Designs:
- jet black, blue
- External thread: NPT

Characteristics:

Certificate:	LCIE 07 ATEX 6082 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna, Ex e RAL 9005 Art.-No. jet black, Ex e RAL 9005	referenca SIB Katalog S. 68 Reference catalogue SIB page 68	JP kom. PU pcs.
NPT 5/8"	3,0 - 8,0	11,0	19,0	38,0	5507740	F8040800E	50
NPT 1/2"	7,0 - 12,0	14,0	24,0	44,0	5507741	F8041200E	50
NPT 3/4"	12,0 - 18,0	15,0	33,0	54,0	5507742	F8042000E	10
NPT 1"	16,0 - 25,0	18,0	42,0	60,0	5507743	F8042800E	10

3.4

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla plava, Ex e RAL 9005 Art.-No. blue, Ex e RAL 9005	referenca SIB Katalog S. 68 Reference catalogue SIB page 68	JP kom. PU pcs.
NPT 5/8"	3,0 - 8,0	11,0	19,0	38,0	5507760	F7440800E	50
NPT 1/2"	7,0 - 12,0	14,0	24,0	44,0	5507761	F7441200E	50
NPT 3/4"	12,0 - 18,0	15,0	33,0	54,0	5507762	F7442000E	10
NPT 1"	16,0 - 25,0	18,0	42,0	60,0	5507763	F7442800E	10


Kabelska uvodnica ATEX Ex e WADI-TEC

poliamid 25 % GF
ECA-stezni prsten
metrički/PG-navoj

Cable gland ATEX Ex e WADI-TEC

Polyamide 25 % GF
ECA-Clamping-Ring
metric/PG-thread

RoHS | Ex | IP 68 | PG | EN 50262 | INMETRO





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: poliamid PA 6, 25 % ojačan staklenim vlaknima
- 2: brtva: neopren
- 3: ECA-stezni prsten: polikarbonat

Radna temperatura:
-20°C do 55°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički/PG
- kratki/dugi navoj

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2
zona:	21, 22 sa ravnom brtvom

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Neoprene
- 3: ECA-Clamping-Ring: Polycarbonate

Temperature range:
-20°C to 55°C

Colour(s)/Designs:
- black
- External thread: Metric/PC
- short/long thread

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2
Zone:	21, 22 with flat sealing

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	za kabel promjera sa zaštitom od izvlačenja mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna Art.-No. black	referenca SIB Katalog S. 68 Reference catalogue SIB page 68	odgovarajuće matice Lock nut	JP kom. PU pcs.
metrički, kratki navoj / metric, short thread									
M 16 x 1,5	5,5 - 8,5	3,5 - 5,5	8,0	19,0	32,0	5507250			50
M 20 x 1,5/13	8,0 - 12,5	5,0 - 8,0	9,0	24,0	36,0	5507251			50
M 20 x 1,5/16	10,0 - 14,0	6,5 - 10,0	9,0	27,0	39,0	5507252			50
M 25 x 1,5	12,5 - 18,5	8,0 - 12,5	11,0	33,0	44,0	5507253			20
M 32 x 1,5	18,0 - 25,0	10,0 - 18,0	12,0	42,0	55,0	5507254			20
metrički, dugi navoj / metric, long thread									
M 16 x 1,5	5,5 - 8,5	3,5 - 5,5	15,0	19,0	39,0	5507360			50
M 20 x 1,5	8,0 - 12,5	5,0 - 8,0	15,0	24,0	42,0	5507361			50
M 20 x 1,5/13	10,0 - 14,0	6,5 - 10,0	15,0	27,0	45,0	5507362			50
M 25 x 1,5/16	12,5 - 18,5	8,0 - 12,5	15,0	33,0	49,0	5507363			20
M 32 x 1,5	18,0 - 25,0	10,0 - 18,0	15,0	42,0	58,0	5507364			20
M 40 x 1,5	24,0 - 34,0	-	15,0	55,0	62,0	5507365			20
M 50 x 1,5	34,0 - 42,0	-	15,0	65,0	65,0	5507366			10
M 63 X 1,5	40,0 - 48,0	-	15,0	70,0	65,0	5507367			5
PG, kratki navoj / PG, short thread									
PG 9	5,5 - 8,5	3,5 - 5,5	8,0	19,0	32,0	5507050			50
PG 11	6,5 - 10,5	4,0 - 6,5	8,0	22,0	35,0	5507051			50
PG 13,5	8,0 - 12,5	5,0 - 8,0	9,0	24,0	36,0	5507052			50
PG 16	10,0 - 14,0	6,5 - 10,0	10,0	27,0	40,0	5507053			50
PG 21	12,5 - 18,5	8,0 - 12,5	11,0	33,0	44,0	5507054			20
PG 29	18,0 - 25,0	10,0 - 18,0	12,0	42,0	55,0	5507055			20
PG, dugi navoj / PG, long thread									
PG 9	3,5 - 5,5	3,5 - 5,5	15,0	19,0	39,0	5507150			50
PG 11	6,5 - 10,5	4,0 - 6,5	15,0	22,0	42,0	5507151			50
PG 13,5	8,0 - 12,5	5,0 - 8,0	15,0	24,0	42,0	5507152			50
PG 16	10,0 - 14,0	6,5 - 10,0	15,0	27,0	45,0	5507153			50
PG 21	12,5 - 18,5	8,0 - 12,5	15,0	33,0	49,0	5507154			20
PG 29	18,0 - 25,0	10,0 - 18,0	15,0	42,0	58,0	5507155			20
PG 36	24,0 - 34,0	-	18,0	55,0	65,0	5507156			10
PG 42	34,0 - 42,0	-	18,0	65,0	68,0	5507157			5
PG 48	40,0 - 48,0	-	18,0	70,0	68,0	5507158			5


Kabelska uvodnica ATEX Ex e WADI-TEC

poliamid 25 % GF
za plosnati kabel
metrički navoj, kratki

Cable gland ATEX Ex e WADI-TEC

Polyamide 25 % GF
flat cable sealing
metric thread, short

RoHS | Ex | IP 68 | IP 66 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid PA 6, 25 % ojačan staklenim vlaknima
- 2: brtva: elastomer

Radna temperatura:
-20°C do 55°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički
- kratki navoj
- brtva za plosnati kabel, zaobljeni

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2
zona:	21, 22 sa ravnom brtvom

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Elastomere

Temperature range:
-20°C to 55°C

Colour(s)/Designs:
- black
- External thread: Metric
- short thread
- sealing for flat cable, round

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2 21, 22 with flat sealing

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	plosnati kabel, zaobljeni – Flat cable, round: za kabel promjera mm Clamping range mm	broj artikla crna Art.-No. black	JP kom. PU pcs.
M 16 x 1,5	8,0	19,0	30,0	3,5 - 5,5	5321801	na upit
M 20 x 1,5	9,0	24,0	32,0	3,0 - 12,0	5321802	on request
M 20 x 1,5	9,0	24,0	32,0	5,0 - 11,0	5321803	na upit
M 20 x 1,5	9,0	27,0	36,0	5,0 - 12,0	5321804	on request
M 20 x 1,5	9,0	27,0	36,0	7,5 - 14,0	5321805	na upit
M 25 x 1,5	11,0	33,0	42,0	5,0 - 16,0	5321806	on request
M 25 x 1,5	11,0	33,0	42,0	5,0 - 17,0	5321807	na upit
M 25 x 1,5	11,0	33,0	42,0	7,0 - 18,0	5321808	on request
M 25 x 1,5	11,0	33,0	42,0	9,0 - 15,0	5321809	na upit
M 32 x 1,5	12,0	42,0	50,0	8,0 - 25,0	5321810	on request
M 32 x 1,5	12,0	42,0	50,0	10,0 - 25,0	5321811	na upit
M 40 x 1,5	15,0	55,0	53,0	6,0 - 29,0	5321812	on request
M 40 x 1,5	15,0	55,0	53,0	6,0 - 30,0	5321813	na upit
M 40 x 1,5	15,0	55,0	53,0	6,0 - 36,0	5321814	on request
M 40 x 1,5	15,0	55,0	53,0	8,0 - 36,0	5321815	na upit
M 40 x 1,5	15,0	55,0	53,0	11,0 - 34,0	5321816	on request
M 40 x 1,5	15,0	55,0	53,0	12,0 - 35,0	5321817	na upit
M 40 x 1,5	15,0	55,0	53,0	13,0 - 28,0	5321818	on request
M 50 x 1,5	15,0	65,0	57,0	10,0 - 38,0	5321819	na upit
M 50 x 1,5	15,0	65,0	57,0	13,0 - 35,0	5321820	on request
M 50 x 1,5	15,0	65,0	57,0	14,0 - 37,0	5321821	na upit
M 63 x 1,5	15,0	70,0	58,0	6,5 - 47,0	5321822	on request
M 63 x 1,5	15,0	70,0	58,0	9,0 - 43,0	5321823	na upit
M 63 x 1,5	15,0	70,0	58,0	14,5 - 39,0	5321824	on request
M 63 x 1,5	15,0	70,0	58,0	15,0 - 45,0	5321825	na upit


Kabelska uvodnica ATEX Ex e WADI-TEC

poliamid 25 % GF
za plosnati kabel
metrički navoj, dugi

Cable gland ATEX Ex e WADI-TEC

Polyamide 25 % GF
flat cable sealing
metric thread, long

RoHS | Ex | IP 68 | IP 66 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid PA 6, 25 % ojačan staklenim vlaknima
- 2: brtva: elastomer

Radna temperatura:
-20°C do 55°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički
- dugi navoj
- brtva za plosnati kabel, ovalni, zaobljeni ili pravokutni

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2
zona:	21, 22 sa ravnom brtvom

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Elastomere

Temperature range:
-20°C to 55°C

Colour(s)/Designs:
- black
- External thread: Metric
- short thread
- sealing for flat cable, oval, round or angular

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2 21, 22 with flat sealing

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

				plosnati kabel, zaobljeni Flat cable, round		plosnati kabel, pravokutni Flat cable, angular		plosnati kabel, ovalni Flat cable, oval		
vanjski navoj	ključ veličine (H) mm	duljina navoja (E) mm	ukupna duljina (L) mm	za kabel promjera mm	broj artikla crna	za kabel promjera mm	broj artikla crna	za kabel promjera mm	broj artikla crna kom.	JP
External thread	Across Flats (H) mm	Thread length (E) mm	Complete length (L) mm	Clamping range mm	Art.-No. black	Clamping range mm	Art.-No. black	Clamping range mm	Art.-No. black	PU pcs.
M 16 x 1,5	19,0	15,0	36,0	3,5 x 5,5	5321865					na upit
M 20 x 1,5	24,0	15,0	38,0	3,0 x 12,0	5321866			5,0 x 8,0	5321880	on request
M 20 x 1,5	24,0	15,0	38,0	5,0 x 11,0	5321867					na upit
M 20 x 1,5	24,0	15,0	38,0	5,0 x 12,0	5321868			5,0 x 12,0	5321881	on request
M 20 x 1,5	27,0	15,0	42,0					5,5 x 8,5	5321882	na upit
M 20 x 1,5	27,0	15,0	42,0					7,0 x 14,0	5321883	on request
M 20 x 1,5	27,0	15,0	42,0	7,5 x 14,0	5321869	8,0 x 12,0	5321890			na upit
M 25 x 1,5	33,0	15,0	46,0			4,0 x 15,0	5321891			on request
M 25 x 1,5	33,0	15,0	46,0					5,0 x 15,0	5321884	na upit
M 25 x 1,5	33,0	15,0	46,0	5,0 x 16,0	5321870			5,0 x 16,0	5321885	on request
M 25 x 1,5	33,0	15,0	46,0	5,0 x 17,0	5321871			6,0 x 15,0	5321886	na upit
M 25 x 1,5	33,0	15,0	46,0	7,0 x 18,0	5321872			7,0 x 16,5	5321887	on request
M 25 x 1,5	33,0	15,0	46,0	9,0 x 15,0	5321873					na upit
M 32 x 1,5	42,0	15,0	53,0					7,0 x 20,0	5321888	on request
M 32 x 1,5	42,0	15,0	53,0	8,0 x 25,0	5321874					na upit
M 32 x 1,5	42,0	15,0	53,0	10,0 x 25,0	5321875					on request


Kabelska uvodnica ATEX Ex e WADI-TEC

poliamid 25 % GF
za plosnati kabel
PG-navoj, kratki

Cable gland ATEX Ex e WADI-TEC

Polyamide 25 % GF
flat cable sealing
PG-thread, short

RoHS | IP 68 | IP 66





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid PA 6, 25 % ojačan staklenim vlaknima
- 2: brtva: elastomer

Radna temperatura:
-20°C do 55°C

Boje/izvedbe:
- crna
- vanjski navoj: PG
- kratki navoj
- brtva za plosnati kabel, zaobljeni

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2
zona:	21, 22 sa ravnom brtvom

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Elastomere

Temperature range:
-20°C to 55°C

Colour(s)/Designs:
- black
- External thread: PG
- short thread
- sealing for flat cable, round

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2
Zone:	21, 22 with flat sealing

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

				plosnati kabel, zaobljeni Flat cable, round		
vanjski navoj External thread	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	za kabel promjera mm Clamping range mm	broj artikla crna Art.-No. black	JP kom. PU pcs.
PG 9	8,0	19,0	30,0	3,5 x 5,5	5321701	na upit
PG 11	8,0	22,0	34,0	2,8 x 10,5	5321702	on request
PG 11	8,0	22,0	34,0	3,5 x 9,0	5321703	na upit
PG 11	8,0	22,0	34,0	4,0 x 6,0	5321704	on request
PG 13	9,0	24,0	31,0	3,0 x 12,0	5321705	na upit
PG 13	9,0	24,0	31,0	5,0 x 11,0	5321706	on request
PG 16	10,0	27,0	36,0	5,0 x 12,0	5321707	na upit
PG 16	10,0	33,0	38,0	5,0 x 16,0	5321708	on request
PG 16	10,0	27,0	36,0	7,5 x 14,0	5321709	na upit
PG 21	11,0	33,0	42,0	5,0 x 17,0	5321710	on request
PG 21	11,0	33,0	42,0	7,0 x 18,0	5321711	na upit
PG 21	11,0	33,0	42,0	9,0 x 15,0	5321712	on request
PG 29	12,0	42,0	48,0	8,0 x 25,0	5321713	na upit
PG 29	12,0	42,0	48,0	10,0 x 25,0	5321714	on request
PG 29	12,0	55,0	50,0	6,0 x 29,0	5321715	na upit
PG 29	12,0	55,0	50,0	13,0 x 28,0	5321716	on request
PG 36	18,0	55,0	56,0	6,0 x 30,0	5321717	na upit
PG 36	18,0	55,0	56,0	6,0 x 36,0	5321718	on request
PG 36	18,0	55,0	56,0	8,0 x 36,0	5321719	na upit
PG 36	18,0	55,0	56,0	11,0 x 34,0	5321720	on request
PG 36	18,0	55,0	56,0	12,0 x 35,0	5321721	na upit
PG 42	18,0	65,0	60,0	10,0 x 38,0	5321722	on request
PG 42	18,0	65,0	60,0	13,0 x 35,0	5321723	na upit
PG 42	18,0	65,0	60,0	14,0 x 37,0	5321724	on request
PG 48	18,0	70,0	60,0	6,5 x 47,0	5321725	na upit
PG 48	18,0	70,0	60,0	9,0 x 43,0	5321726	on request
PG 48	18,0	70,0	60,0	14,5 x 39,0	5321727	na upit


Kabelska uvodnica ATEX Ex e WADI-TEC Duplo

Polyamid 25 % GF
brtva sa više otvora
PG-navoj, kratki

Cable gland ATEX Ex e WADI-TEC Duplo

Polyamide 25 % GF
multi-holed sealing
PG-thread, short

RoHS | IP 68 | IP 66





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid PA 6, 25 % ojačan staklenim vlaknima
- 2: brtva: elastomer

Radna temperatura:
-20°C do 55°C

Boje/izvedbe:
- crna
- vanjski navoj: PG
- kratki navoj
- brtva sa više otvora
- zabrtvljeni otvori
- nije potrebno čepiti otvor brtve

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2,
zona:	21, 22 sa ravnom brtvom

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Elestomere

Temperature range:
-20°C to 55°C

Colour(s)/Designs:
- black
- External thread: PG
- short thread
- multi-holed sealing
- Blind hole sealing
- no blind pin required

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2,
Zone:	21, 22 with flat sealing

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	količina Quantity	promjer otvora mm hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna Art.-No. black	JP kom. PU pcs.
PG 7	1 x	4,0	8,0	15,0	31,0	5318601	50
PG 7	1 x	5,0	8,0	15,0	31,0	5318602	50
PG 9	1 x	5,0	8,0	19,0	30,0	5318603	50
PG 9	2 x	1,0	8,0	19,0	30,0	5318604	50
PG 9	2 x	3,0	8,0	19,0	30,0	5318605	50
PG 9	2 x	3,5	8,0	19,0	30,0	5318606	50
PG 9	2 x	4,0	8,0	19,0	30,0	5318607	50
PG 9	3 x	3,0	8,0	19,0	30,0	5318608	50
PG 9	4 x	3,0	8,0	22,0	30,0	5318609	50
PG 9	4 x	4,0	8,0	22,0	30,0	5318610	50
PG 11	2 x	2,3	8,0	22,0	34,0	5318611	50
PG 11	2 x	3,0	8,0	22,0	34,0	5318612	50
PG 11	2 x	3,5	8,0	22,0	34,0	5318613	50
PG 11	2 x	4,0	8,0	22,0	34,0	5318614	50
PG 11	2 x	5,0	8,0	22,0	34,0	5318615	50
PG 11	3 x	3,0	8,0	22,0	34,0	5318616	50
PG 11	3 x	3,5	8,0	22,0	34,0	5318617	50
PG 11	3 x	4,0	8,0	22,0	34,0	5318618	50
PG 11	4 x	1,5	8,0	22,0	34,0	5318619	50
PG 11	4 x	3,5	8,0	22,0	34,0	5318620	50
PG 11	6 x	2,0	8,0	22,0	34,0	5318621	50
PG 11	6 x	2,5	8,0	22,0	34,0	5318622	50
PG 11	3 x	5,3	8,0	24,0	34,0	5318623	50
PG 11	2 x	6,0	8,0	27,0	34,0	5318624	50
PG 11	3 x	5,0	8,0	27,0	34,0	5318625	50
PG 13	2 x	3,0	9,0	24,0	31,0	5318626	50
PG 13	2 x	5,0	9,0	24,0	31,0	5318627	50
PG 13	2 x	6,0	9,0	24,0	31,0	5318628	50
PG 13	3 x	2,0	9,0	24,0	31,0	5318629	50
PG 13	3 x	3,0	9,0	24,0	31,0	5318630	50
PG 13	3 x	4,0	9,0	24,0	31,0	5318631	50
PG 13	3 x	5,3	9,0	24,0	31,0	5318632	50
PG 13	4 x	3,0	9,0	24,0	31,0	5318633	50
PG 13	4 x	4,0	9,0	24,0	31,0	5318634	50
PG 13	6 x	3,5	9,0	24,0	31,0	5318635	50
PG 13	10 x	2,0	9,0	24,0	31,0	5318636	50
PG 13	3 x	6,0	9,0	27,0	36,0	5318637	50
PG 13	4 x	5,3	9,0	27,0	36,0	5318639	50

vanjski navoj External thread	količina Quantity	promjer otvora mm hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna Art.-No. black	JP kom. PU pcs.
PG 16	2 x	4,0	10,0	27,0	36,0	5318640	50
PG 16	2 x	5,0	10,0	27,0	36,0	5318641	50
PG 16	2 x	6,0	10,0	27,0	36,0	5318642	50
PG 16	2 x	7,0	10,0	27,0	36,0	5318643	50
PG 16	3 x	3,0	10,0	27,0	36,0	5318644	50
PG 16	3 x	4,0	10,0	27,0	36,0	5318645	50
PG 16	3 x	5,0	10,0	27,0	36,0	5318646	50
PG 16	3 x	5,6	10,0	27,0	36,0	5318647	50
PG 16	3 x	6,0	10,0	27,0	36,0	5318648	50
PG 16	4 x	4,0	10,0	27,0	36,0	5318649	50
PG 16	5 x	4,0	10,0	27,0	36,0	5318650	50
PG 16	5 x	5,0	10,0	27,0	36,0	5318651	50
PG 16	6 x	4,0	10,0	27,0	36,0	5318652	50
PG 16	2 x	8,0	10,0	33,0	38,0	5318653	20
PG 16	2 x	9,0	10,0	33,0	38,0	5318654	20
PG 16	3 x	7,0	10,0	33,0	38,0	5318655	20
PG 16	3 x	8,0	10,0	33,0	38,0	5318656	20
PG 16	4 x	5,0	10,0	33,0	38,0	5318657	20
PG 16	4 x	6,0	10,0	33,0	38,0	5318658	20
PG 16	7 x	4,0	10,0	33,0	38,0	5318659	20
PG 21	2 x	4,5	11,0	33,0	42,0	5318660	20
PG 21	2 x	8,0	11,0	33,0	42,0	5318661	20
PG 21	3 x	7,0	11,0	33,0	42,0	5318662	20
PG 21	3 x	8,0	11,0	33,0	42,0	5318663	20
PG 21	4 x	5,0	11,0	33,0	42,0	5318664	20
PG 21	4 x	6,0	11,0	33,0	42,0	5318665	20
PG 21	5 x	5,0	11,0	33,0	42,0	5318666	20
PG 21	5 x	6,0	11,0	33,0	42,0	5318667	20
PG 21	5 x	6,5	11,0	33,0	42,0	5318668	20
PG 21	6 x	4,0	11,0	33,0	42,0	5318669	20
PG 21	6 x	5,0	11,0	33,0	42,0	5318670	20
PG 21	8 x	4,0	11,0	33,0	42,0	5318671	20
PG 21	8 x	5,0	11,0	33,0	42,0	5318672	20
PG 21	2 x	8,7	11,0	42,0	48,0	5318673	20
PG 21	2 x	9,0	11,0	42,0	48,0	5318674	20
PG 21	2 x	11,0	11,0	42,0	48,0	5318675	20
PG 21	3 x	9,0	11,0	42,0	48,0	5318676	20
PG 21	4 x	7,5	11,0	42,0	48,0	5318677	20
PG 21	4 x	8,0	11,0	42,0	48,0	5318678	20
PG 21	6 x	6,0	11,0	42,0	48,0	5318679	20
PG 21	6 x	6,5	11,0	42,0	48,0	5318680	20
PG 21	6 x	7,0	11,0	42,0	48,0	5318681	20
PG 21	7 x	6,0	11,0	42,0	48,0	5318682	20
PG 21	11 x	5,0	11,0	42,0	48,0	5318683	20
PG 21	21 x	2,0	11,0	42,0	48,0	5318684	20
PG 21	28 x	3,0	11,0	42,0	48,0	5318685	20
PG 29	2 x	9,0	12,0	42,0	48,0	5318686	20
PG 29	2 x	11,0	12,0	42,0	48,0	5318687	20
PG 29	2 x	12,0	12,0	42,0	48,0	5318688	20
PG 29	3 x	9,0	12,0	42,0	48,0	5318689	20
PG 29	3 x	11,0	12,0	42,0	48,0	5318690	20
PG 29	4 x	8,0	12,0	42,0	48,0	5318691	20
PG 29	4 x	9,0	12,0	42,0	48,0	5318692	20
PG 29	4 x	10,0	12,0	42,0	48,0	5318693	20
PG 29	6 x	6,0	12,0	42,0	48,0	5318694	20
PG 29	6 x	6,5	12,0	42,0	48,0	5318695	20
PG 29	6 x	7,0	12,0	42,0	48,0	5318696	20
PG 29	7 x	6,0	12,0	42,0	48,0	5318697	20
PG 29	7 x	7,0	12,0	42,0	48,0	5318698	20
PG 29	8 x	5,0	12,0	42,0	48,0	5318699	20
PG 29	8 x	6,0	12,0	42,0	48,0	5318700	20
PG 29	10 x	6,0	12,0	42,0	48,0	5318701	20
PG 29	11 x	5,0	12,0	42,0	48,0	5318702	20
PG 29	28 x	3,0	12,0	42,0	48,0	5318703	20


Kabelska uvodnica ATEX Ex e WADI-TEC Duplo

Polyamid 25 % GF
brtva sa više otvora
metrički navoj, kratki

Cable gland ATEX Ex e WADI-TEC Duplo

Polyamide 25 % GF
multi-holed sealing
metric thread, short

RoHS | Ex | IP 68 | IP 66 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: poliamid PA 6, 25 % ojačan staklenim vlaknima
- 2: brtva: elastomer

Radna temperatura:
-20°C do 55°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički
- kratki navoj
- brtva sa više otvora
- zabrtvljeni otvori
- nije potrebno čepiti otvor brtve

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2,
zona:	21, 22 sa ravnom brtvom

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: Polyamide PA 6, 25 % glassfiber reinforced
- 2: Sealing: Elestomere

Temperature range:
-20°C to 55°C

Colour(s)/Designs:
- black
- External thread: Metric
- short thread
- multi-holed sealing
- Blind hole sealing
- no blind pin required

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2,
Zone:	21, 22 with flat sealing

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	količina Quantity	promjer otvora mm hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna Art.-No. black	JP kom. PU pcs.
M 16 x 1,5	2 x	1,0	8,0	19,0	30,0	5318501	50
M 16 x 1,5	2 x	3,0	8,0	19,0	30,0	5318502	50
M 16 x 1,5	2 x	3,5	8,0	19,0	30,0	5318503	50
M 16 x 1,5	2 x	4,0	8,0	19,0	30,0	5318504	50
M 16 x 1,5	3 x	3,0	8,0	19,0	30,0	5318505	50
M 20 x 1,5	2 x	3,0	9,0	24,0	32,0	5318506	50
M 20 x 1,5	2 x	4,0	9,0	27,0	36,0	5318507	50
M 20 x 1,5	3 x	2,0	9,0	24,0	32,0	5318508	50
M 20 x 1,5	2 x	5,0	9,0	27,0	36,0	5318509	50
M 20 x 1,5	4 x	3,0	9,0	24,0	32,0	5318510	50
M 20 x 1,5	2 x	6,0	9,0	27,0	36,0	5318511	50
M 20 x 1,5	6 x	3,5	9,0	24,0	32,0	5318512	50
M 20 x 1,5	2 x	7,0	9,0	27,0	36,0	5318513	50
M 20 x 1,5	10 x	2,0	9,0	24,0	32,0	5318514	50
M 20 x 1,5	3 x	3,0	9,0	27,0	36,0	5318515	50
M 20 x 1,5	3 x	4,0	9,0	27,0	36,0	5318516	50
M 20 x 1,5	3 x	5,0	9,0	27,0	36,0	5318517	50
M 20 x 1,5	3 x	5,6	9,0	27,0	36,0	5318518	50
M 20 x 1,5	3 x	6,0	9,0	27,0	36,0	5318519	50
M 20 x 1,5	4 x	4,0	9,0	27,0	36,0	5318520	50
M 20 x 1,5	5 x	4,0	9,0	27,0	36,0	5318521	50
M 20 x 1,5	5 x	5,0	9,0	27,0	36,0	5318522	50
M 20 x 1,5	6 x	4,0	9,0	27,0	36,0	5318523	50
M 25 x 1,5	2 x	4,5	11,0	33,0	42,0	5318524	20
M 25 x 1,5	2 x	8,0	11,0	33,0	42,0	5318525	20
M 25 x 1,5	3 x	7,0	11,0	33,0	42,0	5318526	20
M 25 x 1,5	3 x	8,0	11,0	33,0	42,0	5318527	20
M 25 x 1,5	4 x	5,0	11,0	33,0	42,0	5318528	20
M 25 x 1,5	4 x	6,0	11,0	33,0	42,0	5318529	20
M 25 x 1,5	5 x	5,0	11,0	33,0	42,0	5318530	20
M 25 x 1,5	5 x	6,0	11,0	33,0	42,0	5318531	20
M 25 x 1,5	5 x	6,5	11,0	33,0	42,0	5318532	20
M 25 x 1,5	6 x	4,0	11,0	33,0	42,0	5318533	20
M 25 x 1,5	6 x	5,0	11,0	33,0	42,0	5318534	20
M 25 x 1,5	8 x	4,0	11,0	33,0	42,0	5318535	20
M 25 x 1,5	8 x	5,0	11,0	33,0	42,0	5318536	20
M 25 x 1,5	21 x	2,0	11,0	33,0	42,0	5318537	20
M 32 x 1,5	2 x	9,0	12,0	42,0	50,0	5318538	20


vanjski navoj External thread	količina Quantity	promjer otvora mm hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna Art.-No. black	JP kom. PU pcs.
M 32 x 1,5	2 x	11,0	12,0	42,0	50,0	5318539	20
M 32 x 1,5	2 x	12,0	12,0	42,0	50,0	5318540	20
M 32 x 1,5	3 x	9,0	12,0	42,0	50,0	5318541	20
M 32 x 1,5	3 x	11,0	12,0	42,0	50,0	5318542	20
M 32 x 1,5	4 x	8,0	12,0	42,0	50,0	5318543	20
M 32 x 1,5	4 x	9,0	12,0	42,0	50,0	5318544	20
M 32 x 1,5	4 x	10,0	12,0	42,0	50,0	5318545	20
M 32 x 1,5	6 x	6,0	12,0	42,0	50,0	5318546	20
M 32 x 1,5	6 x	6,5	12,0	42,0	50,0	5318547	20
M 32 x 1,5	6 x	7,0	12,0	42,0	50,0	5318548	20
M 32 x 1,5	7 x	6,0	12,0	42,0	50,0	5318549	20
M 32 x 1,5	7 x	7,0	12,0	42,0	50,0	5318550	20
M 32 x 1,5	8 x	5,0	12,0	42,0	50,0	5318551	20
M 32 x 1,5	8 x	6,0	12,0	42,0	50,0	5318552	20
M 32 x 1,5	10 x	6,0	12,0	42,0	50,0	5318553	20
M 32 x 1,5	11 x	5,0	12,0	42,0	50,0	5318554	20
M 32 x 1,5	28 x	3,0	12,0	42,0	50,0	5318555	20

Kabelska uvodnica ATEX Ex e S-TEC

mesing niklani
metrički navoj

Cable gland ATEX Ex e S-TEC

nickel-plated brass
metric thread





RoHS | Ex | IP 68 | IP 66 | PG | EN 50262

Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtveni prsten: neopren
- 3: stezni prsten: poliamid 6
- 5: O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki/dugi navoj
- raspoloživo i sa redukcijskom brtvom

Svojstva:

certifikat:	LCIE 03 ATEX 6400 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing ring: Neoprene
- 3: Clamping shell: Polyamide 6
- 5: O-ring: Nitrile

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short/long thread
- also available with reduction sealing insert

Characteristics:

Certificate:	LCIE 03 ATEX 6400 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread							
M 12 x 1,5	4,5 - 6,5	5,0	14,0	14,0	25,0	4108012	50
M 16 x 1,5	5,0 - 9,5	5,0	17,0	17,0	28,0	4108016	50
M 20 x 1,5	8,0 - 13,0	6,0	22,0	22,0	32,0	4108020	50
M 25 x 1,5	9,0 - 16,0	7,0	27,0	27,0	35,0	4108025	20
M 32 x 1,5	12,0 - 21,0	8,0	34,0	34,0	38,0	4108032	20
M 40 x 1,5	16,0 - 27,0	8,0	42,0	42,0	41,0	4108040	20
M 50 x 1,5	23,0 - 35,0	9,0	55,0	55,0	46,0	4108050	10
M 63 x 1,5	36,0 - 48,0	10,0	65,0	65,0	54,0	4108063	5
dugi navoj / long thread							
M 12 x 1,5	4,5 - 6,5	15,0	14,0	14,0	35,0	4108112	50
M 16 x 1,5	5,0 - 9,5	15,0	17,0	17,0	38,0	4108116	50
M 20 x 1,5	8,0 - 13,0	15,0	22,0	22,0	41,0	4108120	50
M 25 x 1,5	9,0 - 16,0	15,0	27,0	27,0	43,0	4108125	20
M 32 x 1,5	12,0 - 21,0	15,0	34,0	34,0	45,0	4108132	20
M 40 x 1,5	16,0 - 27,0	15,0	42,0	42,0	48,0	4108140	20
M 50 x 1,5	23,0 - 35,0	15,0	55,0	55,0	52,0	4108150	10
M 63 x 1,5	36,0 - 48,0	15,0	65,0	65,0	59,0	4108163	5


Kabelska uvodnica ATEX Ex e S-TEC

mesing niklani
PG-/NPT-navoj

Cable gland ATEX Ex e S-TEC

nickel-plated brass
PG-/NPT-thread

RoHS | Ex | IP 68 | IP 66 | PG





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtveni prsten: neopren
- 3: stezni prsten: poliamid 6
- 5: O-brtva: nitril

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG/NPT
- kratki/dugi navoj

Svojstva:

certifikat:	LCIE 03 ATEX 6400 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing ring: Neoprene
- 3: Clamping shell: Polyamide 6
- 5: O-ring: Nitrile

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG/NPT
- short/long thread

Characteristics:

Certificate:	LCIE 03 ATEX 6400 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread							
PG 7	4,5 - 6,5	5,0	14,0	14,0	25,0	4108207	50
PG 9	5,0 - 9,5	6,0	17,0	17,0	29,0	4108209	50
PG 11	7,0 - 11,5	6,0	20,0	20,0	30,0	4108211	50
PG 13,5	8,0 - 13,0	6,5	22,0	22,0	32,5	4108213	50
PG 16	9,0 - 15,0	6,5	24,0	24,0	34,0	4108216	25
PG 21	12,0 - 19,0	7,0	30,0	30,0	35,0	4108221	20
PG 29	17,0 - 26,0	8,0	40,0	40,0	38,0	4108229	15
PG 36	23,0 - 34,5	9,0	50,0	50,0	42,0	4108236	10
PG 42	28,0 - 40,0	10,0	58,0	58,0	47,0	4108242	10
PG 48	36,0 - 48,0	10,0	65,0	65,0	54,0	4108248	10
dugi navoj / long thread							
PG 7	4,5 - 6,5	15,0	14,0	14,0	35,0	4108307	50
PG 9	5,0 - 9,5	15,0	17,0	17,0	38,0	4108309	50
PG 11	7,0 - 11,5	15,0	20,0	20,0	39,0	4108311	50
PG 13,5	8,0 - 13,0	15,0	22,0	22,0	41,0	4108313	50
PG 16	9,0 - 15,0	15,0	24,0	24,0	42,5	4108316	25
PG 21	12,0 - 19,0	15,0	30,0	30,0	43,0	4108321	20
PG 29	17,0 - 26,0	15,0	40,0	40,0	45,0	4108329	15
PG 36	23,0 - 34,5	15,0	50,0	50,0	48,0	4108336	10
PG 42	28,0 - 40,0	15,0	58,0	58,0	52,0	4108342	10
PG 48	36,0 - 48,0	15,0	65,0	65,0	59,0	4108348	10
NPT navoj / NPT thread							
NPT 3/8"	5,0 - 9,5	15,0	18,0	17,0	38,0	4108400	1
NPT 1/2"	8,0 - 13,0	20,0	23,0	22,0	46,0	4108401	1
NPT 3/4"	9,0 - 16,0	20,0	28,0	27,0	48,0	4108402	1
NPT 1"	12,0 - 21,0	25,0	36,0	34,0	55,0	4108403	1


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
ECA-stezni prsten
metrički navoj

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
metric thread

RoHS | Ex | IP 68 | IP 66 | EN 50262





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtveni prsten: elastomer
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki/dugi navoj

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric
- short/long thread

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread							
M 12 x 1,5	3,0 - 6,0	7,0	14,0	14,0	27,0	4107012	50
M 16 x 1,5/7	3,0 - 6,0	7,0	14,0	17,0	27,0	4107016	50
M 16 x 1,5/9	5,0 - 8,0	7,0	17,0	17,0	27,0	4107017	50
M 20 x 1,5/11	6,0 - 10,0	7,0	20,0	22,0	28,0	4107020	50
M 20 x 1,5/13	8,0 - 12,0	7,0	22,0	22,0	29,0	4107021	25
M 25 x 1,5/16	9,5 - 14,0	8,0	24,0	26,0	31,0	4107025	25
M 25 x 1,5/21	11,5 - 18,0	8,0	30,0	30,0	37,0	4107026	25
M 32 x 1,5/21	11,5 - 18,0	8,5	30,0	33,0	38,0	4107032	25
M 32 x 1,5/29	15,0 - 24,0	8,5	40,0	40,0	45,0	4107033	10
M 40 x 1,5	15,0 - 24,0	8,5	40,0	42,0	45,0	4107040	10
M 50 x 1,5	23,0 - 30,0	9,5	50,0	55,0	51,0	4107050	10
M 63 x 1,5	26,0 - 35,0	10,5	58,0	70,0	58,0	4107063	5
dugi navoj / long thread							
M 12 x 1,5	3,0 - 6,0	13,0	14,0	14,0	33,0	4107112	50
M 16 x 1,5/7	3,0 - 6,0	13,0	14,0	17,0	33,0	4107116	50
M 16 x 1,5/9	5,0 - 8,0	13,0	17,0	17,0	33,0	4107117	50
M 20 x 1,5/11	6,0 - 10,0	13,0	20,0	22,0	34,0	4107120	50
M 20 x 1,5/13	8,0 - 12,0	13,0	22,0	22,0	35,0	4107121	25
M 25 x 1,5/16	9,5 - 14,0	14,0	24,0	26,0	37,0	4107125	25
M 25 x 1,5/21	11,5 - 18,0	14,0	30,0	30,0	43,0	4107126	25
M 32 x 1,5/21	11,5 - 18,0	14,5	30,0	33,0	44,0	4107132	25
M 32 x 1,5/29	15,0 - 24,0	14,5	40,0	40,0	51,0	4107133	10
M 40 x 1,5	15,0 - 24,0	14,5	40,0	42,0	51,0	4107140	10
M 50 x 1,5	23,0 - 30,0	15,5	50,0	55,0	57,0	4107150	10
M 63 x 1,5	26,0 - 35,0	16,5	58,0	70,0	64,0	4107163	5


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
ECA-stezni prsten
metrički navoj

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
metric thread

RoHS | Ex | IP 68 | IP 66 | EN 50262





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: neopren
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki/dugi navoj
- sa višeslojnom brtvom

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Neoprene
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric
- short/long thread
- with punchable sealing ring

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
kratki navoj, sa višeslojnom brtvom / short thread, with punchable sealing ring							
M 16 x 1,5/9	3,0 - 5,5 - 8,5	7,0	17,0	17,0	27,0	4107216	50
M 20 x 1,5/11	4,0 - 6,5 - 10,5	7,0	20,0	22,0	28,0	4107220	50
M 20 x 1,5/13	5,0 - 8,0 - 12,5	7,0	22,0	22,0	29,0	4107221	25
M 25 x 1,5/16	6,5 - 10,0 - 14,5	8,0	24,0	26,0	31,0	4107225	25
M 25 x 1,5/21	8,0 - 12,0 - 18,5	8,0	30,0	30,0	37,0	4107226	25
M 32 x 1,5/21	8,0 - 12,0 - 18,5	8,5	30,0	33,0	38,0	4107232	25
M 32 x 1,5/29	10,0 - 16,0 - 24,5	8,5	40,0	40,0	45,0	4107233	10
M 40 x 1,5	10,0 - 16,0 - 24,5	8,5	40,0	42,0	45,0	4107240	10
dugi navoj, sa višeslojnom brtvom / long thread, with punchable sealing ring							
M 16 x 1,5/9	3,0 - 5,5 - 8,5	13,0	17,0	17,0	33,0	4107316	50
M 20 x 1,5/11	4,0 - 6,5 - 10,5	13,0	20,0	22,0	34,0	4107320	50
M 20 x 1,5/13	5,0 - 8,0 - 12,5	13,0	22,0	22,0	35,0	4107321	25
M 25 x 1,5/16	6,5 - 10,0 - 14,5	14,0	24,0	26,0	37,0	4107325	25
M 25 x 1,5/21	8,0 - 12,0 - 18,5	14,0	30,0	30,0	43,0	4107326	25
M 32 x 1,5/21	8,0 - 12,0 - 18,5	14,5	30,0	33,0	44,0	4107332	25
M 32 x 1,5/29	10,0 - 16,0 - 24,5	14,5	40,0	40,0	51,0	4107333	10
M 40 x 1,5	10,0 - 16,0 - 24,5	14,5	40,0	42,0	51,0	4107340	10


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
ECA-stezni prsten
PG navoj

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
PG-thread

RoHS | IP 68 | IP 66





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki/dugi navoj

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: PG
- short/long thread

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
kratki navoj / short thread							
PG 7	3,0 - 6,0	5,0	14,0	14,0	24,0	4107407	50
PG 9	5,0 - 8,0	6,0	17,0	17,0	25,0	4107409	50
PG 11	6,0 - 10,0	6,0	20,0	20,0	26,0	4107411	50
PG 13	8,0 - 12,0	6,5	22,0	22,0	28,0	4107413	50
PG 16	9,5 - 14,0	6,5	24,0	24,0	30,0	4107416	25
PG 21	11,5 - 18,0	7,0	30,0	30,0	35,0	4107421	25
PG 29	15,0 - 24,0	8,0	40,0	40,0	43,0	4107429	10
PG 36	23,0 - 30,0	9,0	50,0	50,0	50,0	4107436	10
PG 42	26,0 - 35,0	10,0	58,0	58,0	57,0	4107442	5
PG 48	35,0 - 40,0	10,0	64,0	64,0	59,0	4107448	5
dugi navoj / long thread							
PG 7	3,0 - 6,0	15,0	14,0	14,0	34,0	4107507	50
PG 9	5,0 - 8,0	15,0	17,0	17,0	34,0	4107509	50
PG 11	6,0 - 10,0	15,0	20,0	20,0	35,0	4107511	50
PG 13	8,0 - 12,0	15,0	22,0	22,0	36,5	4107513	50
PG 16	9,5 - 14,0	15,0	24,0	24,0	38,5	4107516	25
PG 21	11,5 - 18,0	15,0	30,0	30,0	43,0	4107521	25
PG 29	15,0 - 24,0	15,0	40,0	40,0	50,0	4107529	10
PG 36	23,0 - 30,0	18,0	50,0	50,0	59,0	4107536	10
PG 42	26,0 - 35,0	18,0	58,0	58,0	65,0	4107542	5
PG 48	35,0 - 40,0	18,0	64,0	64,0	67,0	4107548	5


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
ECA-stezni prsten
PG navoj

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
PG-thread

RoHS | Ex | IP 68 | IP 66 | PG





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: neopren
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki/dugi navoj
- sa višeslojnom brtvom

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Neoprene
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: PG
- short/long thread
- with punchable sealing ring

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
kratki navoj, sa višeslojnom brtvom / short thread, with punchable sealing ring							
PG 9	3,0 - 5,5 - 8,5	6,0	17,0	17,0	25,0	4107609	50
PG 11	4,0 - 6,5 - 10,5	6,0	20,0	20,0	26,0	4107611	50
PG 13	5,0 - 8,0 - 12,5	6,5	22,0	22,0	28,0	4107613	50
PG 16	6,5 - 10,0 - 14,5	6,5	24,0	24,0	30,0	4107616	25
PG 21	8,0 - 12,0 - 18,5	7,0	30,0	30,0	35,0	4107621	25
PG 29	10,0 - 16,0 - 24,5	8,0	40,0	40,0	43,0	4107629	10
dugi navoj, sa višeslojnom brtvom / long thread, with punchable sealing ring							
PG 9	3,0 - 5,5 - 8,5	15,0	17,0	17,0	34,0	4107709	50
PG 11	4,0 - 6,5 - 10,5	15,0	20,0	20,0	35,0	4107711	50
PG 13	5,0 - 8,0 - 12,5	15,0	22,0	22,0	36,5	4107713	50
PG 16	6,5 - 10,0 - 14,5	15,0	24,0	24,0	38,5	4107716	25
PG 21	8,0 - 12,0 - 18,5	15,0	30,0	30,0	43,0	4107721	25
PG 29	10,0 - 16,0 - 24,5	15,0	40,0	40,0	50,0	4107729	10


Kabelska uvodnica ATEX Ex e WADI-TEC RED

Messing niklani
ECA-stezni prsten
PG-navoj, kratki

Cable gland ATEX Ex e WADI-TEC RED

nickel-plated brass
ECA-Clamping-Ring
PG-thread, short

RoHS | IP 68 | IP 66





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- redukcijska kabelska uvodnica

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: PG
- short thread
- Reduction cable gland

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 9/7 RED	3,0 - 6,0	6,0	14,0	17,0	25,0	4107901	50
PG 11/7 RED	3,0 - 6,0	6,0	14,0	21,0	26,0	4107902	50
PG 11/9 RED	5,0 - 8,0	6,0	17,0	21,0	26,0	4107903	50
PG 13/7 RED	3,0 - 6,0	6,5	14,0	22,0	28,0	4107904	50
PG 13/9 RED	5,0 - 8,0	6,5	17,0	22,0	28,0	4107905	50
PG 13/11 RED	6,0 - 10,0	6,5	20,0	22,0	28,0	4107906	50
PG 16/9 RED	5,0 - 8,0	6,5	17,0	24,0	26,0	4107907	50
PG 16/11 RED	6,0 - 10,0	6,5	20,0	24,0	28,0	4107908	50
PG 16/13 RED	8,0 - 12,0	6,5	22,0	24,0	30,0	4107909	50
PG 21/11 RED	6,0 - 10,0	6,5	20,0	30,0	30,0	4107910	20
PG 21/13 RED	8,0 - 12,0	6,5	22,0	30,0	32,0	4107911	20
PG 21/16 RED	9,5 - 14,0	6,5	24,0	30,0	32,0	4107912	20
PG 29/13 RED	8,0 - 12,0	8,0	22,0	40,0	35,0	4107913	20
PG 29/16 RED	9,5 - 14,0	8,0	24,0	40,0	38,0	4107914	20
PG 29/21 RED	11,5 - 18,0	8,0	30,0	40,0	40,0	4107915	20


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
ECA-stezni prsten
NPT-navoj

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
ECA-Clamping-Ring
NPT-thread

RoHS | Ex | IP 68 | IP 66 | PG





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 3: ECA-stezni prsten: polikarbonat

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: NPT

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 3: ECA-Clamping-Ring: Polycarbonate

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: NPT

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
NPT 3/8"	3,0 - 6,0	15,0	14,0	19,0	35,0	4107800	50
NPT 3/8"	5,0 - 8,0	15,0	17,0	19,0	35,0	4107801	50
NPT 1/2"	5,0 - 8,0	20,0	17,0	22,0	40,0	4107802	50
NPT 1/2"	6,0 - 10,0	20,0	20,0	22,0	42,0	4107803	50
NPT 1/2"	8,0 - 12,0	20,0	22,0	22,0	42,0	4107804	50
NPT 3/4"	9,5 - 14,0	20,0	24,0	30,0	45,0	4107805	20
NPT 3/4"	11,5 - 18,0	20,0	30,0	30,0	49,0	4107806	20
NPT 1"	15,0 - 24,0	25,0	40,0	40,0	60,0	4107807	10
NPT 1 1/4"	15,0 - 24,0	26,0	40,0	46,0	61,0	4107809	5
NPT 1 1/2"	23,0 - 30,0	26,0	50,0	50,0	67,0	4107810	5
NPT 1 1/2"	26,0 - 35,0	26,0	58,0	58,0	73,0	4107811	1
NPT 2"	35,0 - 40,0	27,0	64,0	64,0	76,0	4107812	1


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
za plosnati kabel
metrički navoj, kratki

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
flat cable sealing
metric thread, short

RoHS | Ex | IP 68 | IP 66 | PG | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 4: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- za plosnati kabel
- brtva za plosnati kabel ovalni, zaobljeni ili pravokutni

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 4: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric
- short thread
- flat cable sealing
- sealing for flat cables oval, round or angular

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

					plosnati kabel, zaobljeni Flat cable, round		plosnati kabel, pravokutni Flat cable, angular		plosnati kabel, ovalni Flat cable, oval		
vanjski navoj External thread	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ukupna duljina (L) mm Complete length (L) mm	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	7,0	17,0	17,0	27,0	3,5 x 5,5	4224860					na upit
M 20 x 1,5	7,0	20,0	22,0	28,0	2,8 x 10,5	4224861					on request
M 20 x 1,5	7,0	22,0	22,0	29,0	3,0 x 12,0	4224862					na upit
M 20 x 1,5	7,0	20,0	22,0	28,0	3,5 x 9,0	4224863					on request
M 20 x 1,5	7,0	22,0	22,0	29,0	5,0 x 11,0	4224864			5,0 x 8,0	4224874	na upit
M 20 x 1,5	8,0	24,0	26,0	31,0					5,0 x 12,0	4224875	on request
M 20 x 1,5	7,0	20,0	22,0	28,0	4,0 x 6,0	4224865					na upit
M 25 x 1,5	8,0	24,0	26,0	31,0	5,0 x 12,0	4224866	8,0 x 12,0	4224885	5,0 x 12,0	4224876	on request
M 25 x 1,5	8,0	30,0	30,0	37,0	5,0 x 16,0	4224867	4,0 x 15,0	4224886	5,0 x 15,0	4224877	na upit
M 25 x 1,5	8,0	24,0	26,0	31,0	7,5 x 14,0	4224868			5,5 x 8,5	4224878	on request
M 25 x 1,5	8,0	30,0	30,0	37,0	5,0 x 17,0	4224869			5,0 x 16,0	4224879	na upit
M 25 x 1,5	8,0	24,0	26,0	31,0					6,0 x 10,0	4224880	on request
M 25 x 1,5	8,0	30,0	30,0	37,0	7,0 x 18,0	4224870					na upit
M 25 x 1,5	8,0	30,0	30,0	37,0	9,0 x 15,0	4224871			6,0 x 15,0	4224881	on request
M 25 x 1,5	8,0	24,0	26,0	31,0					7,0 x 14,0	4224882	na upit
M 25 x 1,5	8,0	30,0	30,0	37,0					7,0 x 16,5	4224883	on request
M 32 x 1,5	8,5	40,0	33,0	38,0	8,0 x 25,0	4224872					na upit
M 32 x 1,5	8,5	40,0	33,0	38,0	10,0 x 25,0	4224873			7,0 x 20,0	4224884	on request


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
za plosnati kabel
metrički navoj, dugi

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
flat cable sealing
metric thread, long

RoHS | Ex | IP 68 | IP 66 | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 4: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički
- dugi navoj
- za plosnati kabel
- brtva za plosnati kabel ovalni, zaobljeni ili pravokutni

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 4: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric
- long thread
- flat cable sealing
- sealing for flat cables oval, round or angular

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

					plosnati kabel, zaobljeni Flat cable, round		plosnati kabel, pravokutni Flat cable, angular		plosnati kabel, ovalni Flat cable, oval		
vanjski navoj External thread	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ukupna duljina (L) mm Complete length (L) mm	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	13,0	17,0	17,0	27,0	3,5 x 5,5	4224890					na upit
M 20 x 1,5	13,0	20,0	22,0	28,0	2,8 x 10,5	4224891					on request
M 20 x 1,5	13,0	22,0	22,0	29,0	3,0 x 12,0	4224892					na upit
M 20 x 1,5	13,0	20,0	22,0	28,0	3,5 x 9,0	4224893					on request
M 20 x 1,5	13,0	22,0	22,0	29,0	5,0 x 11,0	4224894			5,0 x 8,0	4224904	na upit
M 20 x 1,5	13,0	22,0	22,0	29,0					5,0 x 12,0	4224905	on request
M 20 x 1,5	13,0	20,0	22,0	28,0	4,0 x 6,0	4224895					na upit
M 25 x 1,5	14,0	24,0	26,0	31,0	5,0 x 12,0	4224896	8,0 x 12,0	4224915	5,0 x 12,0	4224906	on request
M 25 x 1,5	14,0	30,0	30,0	37,0	5,0 x 16,0	4224897	4,0 x 15,0	4224916	5,0 x 15,0	4224907	na upit
M 25 x 1,5	14,0	24,0	26,0	31,0	7,5 x 14,0	4224898			5,5 x 8,5	4224908	on request
M 25 x 1,5	14,0	30,0	30,0	37,0	5,0 x 17,0	4224899			5,0 x 16,0	4224899	na upit
M 25 x 1,5	14,0	24,0	26,0	31,0					6,0 x 10,0	4224910	on request
M 25 x 1,5	14,0	30,0	30,0	37,0	7,0 x 18,0	4224900					na upit
M 25 x 1,5	14,0	30,0	30,0	37,0	9,0 x 15,0	4224901			6,0 x 15,0	4224911	on request
M 25 x 1,5	14,0	24,0	26,0	31,0					7,0 x 14,0	4224912	na upit
M 25 x 1,5	14,0	30,0	30,0	37,0					7,0 x 16,5	4224913	on request
M 32 x 1,5	14,5	40,0	33,0	38,0	8,0 x 25,0	4224902					na upit
M 32 x 1,5	14,5	40,0	33,0	38,0	10,0 x 25,0	4224903			7,0 x 20,0	4224914	on request


Kabelska uvodnica ATEX Ex e WADI-TEC

mesing niklani
za plosnati kabel
PG-navoj, kratki

Cable gland ATEX Ex e WADI-TEC

nickel-plated brass
flat cable sealing
PG-thread, short

RoHS | IP 68 | IP 66





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 4: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- za plosnati kabel
- brtva za plosnati kabel ovalni, zaobljeni ili pravokutni

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 4: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: PG
- short thread
- flat cable sealing
- sealing for flat cables oval, round or angular

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

				plosnati kabel, zaobljeni Flat cable, round		plosnati kabel, pravokutni Flat cable, angular		plosnati kabel, ovalni Flat cable, oval		
vanjski navoj External thread	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	za kabel promjera mm Clamping range mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 9	6,0	17,0	25,0	3,5 x 5,5	4224801					na upit
PG 11	6,0	20,0	26,0	2,8 x 10,5	4224802					on request
PG 11	6,0	20,0	26,0	3,5 x 9,0	4224803					na upit
PG 11	6,0	20,0	26,0	4,0 x 6,0	4224804					on request
PG 13	6,5	22,0	28,0	3,0 x 12,0	4224805			5,0 x 8,0	4224815	na upit
PG 13	6,5	22,0	28,0	5,0 x 11,0	4224806			5,0 x 12,0	4224816	on request
PG 16	6,5	24,0	30,0	5,0 x 12,0	4224807	8,0 x 12,0	4224826	5,0 x 12,0	4224817	na upit
PG 16	6,5	30,0	35,0	5,0 x 16,0	4224808			5,0 x 15,0	4224818	on request
PG 16	6,5	24,0	30,0	7,5 x 14,0	4224809			5,5 x 8,5	4224819	na upit
PG 16	6,5	30,0	35,0					6,0 x 15,0	4224820	on request
PG 16	6,5	24,0	30,0					6,0 x 10,0	4224821	na upit
PG 16	6,5	24,0	30,0					7,0 x 14,0	4224822	on request
PG 21	7,0	30,0	35,0	5,0 x 17,0	4224810	4,0 x 15,0	4224827	5,0 x 16,0	4224823	na upit
PG 21	7,0	30,0	35,0	7,0 x 18,0	4224811			7,0 x 16,5	4224824	on request
PG 21	7,0	40,0	43,0					7,0 x 20,0	4224825	na upit
PG 21	7,0	30,0	35,0	9,0 x 15,0	4224812					on request
PG 29	8,0	40,0	43,0	8,0 x 25,0	4224813					na upit
PG 29	8,0	40,0	43,0	10,0 x 25,0	4224814					on request


Kabelska uvodnica ATEX Ex e WADI-TEC Duplo

mesing niklani
brtva sa više otvora
metrički navoj, kratki

Cable gland ATEX Ex e WADI-TEC Duplo

nickel-plated brass
multi-holed sealing
metric thread, short

RoHS | Ex | IP 68 | IP 66 | PG | EN 50262





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 4: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- brtva sa više otvora
- zabrtvljeni otvori
- nije potrebno čepiti otvor brtve

Svojstva:
certifikat: LCIE 99 ATEX 6030 X
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Seal: Elastomere
- 4: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric
- short thread
- multi-holed sealing
- Blind hole sealing
- No blind pin required

Characteristics:
Certificate: LCIE 99 ATEX 6030 X
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control
- Plant installations

vanjski navoj External thread	količina Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H3) mm Across Flats (H3) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	2 x	1,0	7,0	17,0	17,0	13,0	4247830	na upit
M 16 x 1,5	2 x	3,0	7,0	17,0	17,0	13,0	4247831	on request
M 16 x 1,5	2 x	3,5	7,0	17,0	17,0	13,0	4247832	na upit
M 16 x 1,5	2 x	4,0	7,0	17,0	17,0	13,0	4247833	on request
M 16 x 1,5	3 x	3,0	7,0	17,0	17,0	13,0	4247834	na upit
M 20 x 1,5	2 x	2,3	7,0	20,0	22,0	28,0	4247835	on request
M 20 x 1,5	2 x	3,0	7,0	22,0	22,0	29,0	4247836	na upit
M 20 x 1,5	2 x	3,5	7,0	20,0	22,0	28,0	4247837	on request
M 20 x 1,5	2 x	5,0	7,0	22,0	22,0	29,0	4247838	na upit
M 20 x 1,5	2 x	4,0	7,0	20,0	22,0	28,0	4247839	on request
M 20 x 1,5	2 x	6,0	7,0	22,0	22,0	29,0	4247840	na upit
M 20 x 1,5	3 x	3,5	7,0	20,0	22,0	28,0	4247841	on request
M 20 x 1,5	3 x	2,0	7,0	22,0	22,0	29,0	4247842	na upit
M 20 x 1,5	4 x	1,5	7,0	20,0	22,0	28,0	4247843	on request
M 20 x 1,5	3 x	3,0	7,0	22,0	22,0	29,0	4247844	na upit
M 20 x 1,5	4 x	3,5	7,0	20,0	22,0	28,0	4247845	on request
M 20 x 1,5	3 x	4,0	7,0	22,0	22,0	29,0	4247846	na upit
M 20 x 1,5	6 x	2,0	7,0	20,0	22,0	28,0	4247847	on request
M 20 x 1,5	3 x	5,3	7,0	22,0	22,0	29,0	4247848	na upit
M 20 x 1,5	6 x	2,5	7,0	20,0	22,0	28,0	4247849	on request
M 20 x 1,5	4 x	3,0	7,0	22,0	22,0	29,0	4247850	na upit
M 20 x 1,5	4 x	4,0	7,0	22,0	22,0	29,0	4247851	on request
M 20 x 1,5	6 x	3,5	7,0	22,0	22,0	29,0	4247852	na upit
M 20 x 1,5	10 x	2,0	7,0	22,0	22,0	29,0	4247853	on request
M 25 x 1,5	2 x	4,0	8,0	24,0	26,0	31,0	4247854	na upit
M 25 x 1,5	2 x	4,5	8,0	30,0	30,0	37,0	4247855	on request
M 25 x 1,5	2 x	5,0	8,0	24,0	26,0	31,0	4247856	na upit
M 25 x 1,5	2 x	8,0	8,0	30,0	30,0	37,0	4247857	on request
M 25 x 1,5	2 x	6,0	8,0	24,0	26,0	31,0	4247858	na upit
M 25 x 1,5	3 x	7,0	8,0	30,0	30,0	37,0	4247859	on request
M 25 x 1,5	2 x	7,0	8,0	24,0	26,0	31,0	4247860	na upit
M 25 x 1,5	3 x	8,0	8,0	30,0	30,0	37,0	4247861	on request
M 25 x 1,5	3 x	3,0	8,0	24,0	26,0	31,0	4247862	na upit
M 25 x 1,5	4 x	5,0	8,0	30,0	30,0	37,0	4247863	on request
M 25 x 1,5	3 x	4,0	8,0	24,0	26,0	31,0	4247864	na upit
M 25 x 1,5	4 x	6,0	8,0	30,0	30,0	37,0	4247865	on request
M 25 x 1,5	3 x	5,0	8,0	24,0	26,0	37,0	4247866	na upit
M 25 x 1,5	5 x	5,0	8,0	30,0	30,0	37,0	4247867	on request

vanjski navoj External thread	količina Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H3) mm Across Flats (H3) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
M 25 x 1,5	3 x	5,6	8,0	24,0	26,0	31,0	4247868	na upit
M 25 x 1,5	5 x	6,0	8,0	30,0	30,0	37,0	4247869	on request
M 25 x 1,5	3 x	6,0	8,0	24,0	26,0	31,0	4247870	na upit
M 25 x 1,5	5 x	6,5	8,0	30,0	30,0	37,0	4247871	on request
M 25 x 1,5	4 x	4,0	8,0	24,0	26,0	31,0	4247872	na upit
M 25 x 1,5	6 x	5,0	8,0	30,0	30,0	37,0	4247873	on request
M 25 x 1,5	5 x	4,0	8,0	24,0	26,0	31,0	4247874	na upit
M 25 x 1,5	8 x	4,0	8,0	30,0	30,0	37,0	4247875	on request
M 25 x 1,5	6 x	4,0	8,0	24,0	26,0	31,0	4247876	na upit
M 25 x 1,5	8 x	5,0	8,0	30,0	30,0	37,0	4247877	on request
M 25 x 1,5	21 x	2,0	8,0	30,0	30,0	37,0	4247878	na upit
M 32 x 1,5	2 x	4,5	8,5	30,0	33,0	38,0	4247879	on request
M 32 x 1,5	2 x	8,0	8,5	30,0	33,0	38,0	4247880	na upit
M 32 x 1,5	2 x	9,0	8,5	40,0	40,0	45,0	4247881	on request
M 32 x 1,5	2 x	11,0	8,5	40,0	40,0	45,0	4247882	na upit
M 32 x 1,5	2 x	12,0	8,5	40,0	40,0	45,0	4247883	on request
M 32 x 1,5	3 x	7,0	8,5	30,0	33,0	38,0	4247884	na upit
M 32 x 1,5	3 x	8,0	8,5	30,0	33,0	38,0	4247885	on request
M 32 x 1,5	3 x	9,0	8,5	40,0	40,0	45,0	4247886	na upit
M 32 x 1,5	3 x	11,0	8,5	40,0	40,0	45,0	4247887	on request
M 32 x 1,5	4 x	5,0	8,5	30,0	33,0	38,0	4247888	na upit
M 32 x 1,5	4 x	6,0	8,5	30,0	33,0	38,0	4247889	on request
M 32 x 1,5	4 x	8,0	8,5	40,0	40,0	45,0	4247890	na upit
M 32 x 1,5	4 x	9,0	8,5	40,0	40,0	45,0	4247891	on request
M 32 x 1,5	4 x	10,0	8,5	40,0	40,0	45,0	4247892	na upit
M 32 x 1,5	5 x	5,0	8,5	30,0	33,0	38,0	4247893	on request
M 32 x 1,5	5 x	6,0	8,5	30,0	33,0	38,0	4247894	na upit
M 32 x 1,5	5 x	6,5	8,5	30,0	33,0	38,0	4247895	on request
M 32 x 1,5	6 x	4,0	8,5	30,0	33,0	38,0	4247896	na upit
M 32 x 1,5	6 x	5,0	8,5	30,0	33,0	38,0	4247897	on request
M 32 x 1,5	6 x	6,0	8,5	40,0	40,0	45,0	4247898	na upit
M 32 x 1,5	6 x	6,5	8,5	40,0	40,0	45,0	4247899	on request
M 32 x 1,5	6 x	7,0	8,5	40,0	40,0	45,0	4247900	na upit
M 32 x 1,5	7 x	6,0	8,5	40,0	40,0	45,0	4247901	on request
M 32 x 1,5	7 x	7,0	8,5	40,0	40,0	45,0	4247902	na upit
M 32 x 1,5	8 x	4,0	8,5	30,0	33,0	38,0	4247903	on request
M 32 x 1,5	8 x	5,0	8,5	40,0	40,0	45,0	4247904	na upit
M 32 x 1,5	8 x	6,0	8,5	40,0	40,0	45,0	4247905	on request
M 32 x 1,5	10 x	6,0	8,5	40,0	40,0	45,0	4247906	na upit
M 32 x 1,5	11 x	5,0	8,5	40,0	40,0	45,0	4247907	on request
M 32 x 1,5	21 x	2,0	8,5	30,0	33,0	38,0	4247908	na upit
M 32 x 1,5	28 x	3,0	8,5	40,0	40,0	45,0	4247909	on request


Kabelska uvodnica ATEX Ex e WADI-TEC Duplo

Messing niklani
brtva sa više otvora
PG-navoj, kratki

Cable gland ATEX Ex e WADI-TEC Duplo

nickel-plated brass
multi-holed sealing
PG-thread, short

RoHS | IP 68 | IP 66





Materijal:
- 1/3: tijelo kabelske uvodnice / glava: mesing niklani
- 2: brtva: elastomer
- 4: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: PG
- kratki navoj
- brtva sa više otvora
- zabrtvljeni otvori
- nije potrebno čepiti otvor brtve

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X/1
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/3: Gland element/Cap nut: nickel-plated brass
- 2: Sealing: Elastomere
- 4: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: PG
- short thread
- multi-holed sealing
- Blind hole sealing
- No blind pin required

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X/1
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	količina Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 7	1 x	4,0	5,0	14,0	24,0	4247600	na upit
PG 7	1 x	5,0	5,0	14,0	24,0	4247601	on request
PG 9	1 x	5,0	6,0	17,0	25,0	4247602	na upit
PG 9	2 x	1,0	6,0	17,0	25,0	4247603	on request
PG 9	2 x	3,0	6,0	17,0	25,0	4247604	na upit
PG 9	2 x	3,5	6,0	17,0	25,0	4247605	on request
PG 9	2 x	4,0	6,0	17,0	25,0	4247606	na upit
PG 9	3 x	3,0	6,0	17,0	25,0	4247607	on request
PG 9	4 x	3,0	6,0	20,0	26,0	4247608	na upit
PG 9	4 x	4,0	6,0	20,0	26,0	4247609	on request
PG 11	2 x	2,3	6,0	20,0	26,0	4247610	na upit
PG 11	2 x	3,0	6,0	20,0	26,0	4247611	on request
PG 11	2 x	3,5	6,0	20,0	26,0	4247612	na upit
PG 11	2 x	4,0	6,0	20,0	26,0	4247613	on request
PG 11	2 x	5,0	6,0	20,0	26,0	4247614	na upit
PG 11	3 x	3,0	6,0	20,0	26,0	4247615	on request
PG 11	3 x	3,5	6,0	20,0	26,0	4247616	na upit
PG 11	3 x	4,0	6,0	20,0	26,0	4247617	on request
PG 11	4 x	1,5	6,0	20,0	26,0	4247618	na upit
PG 11	4 x	3,5	6,0	20,0	26,0	4247619	on request
PG 11	6 x	2,0	6,0	20,0	26,0	4247620	na upit
PG 11	6 x	2,5	6,0	20,0	26,0	4247621	on request
PG 11	3 x	5,3	6,5	22,0	28,0	4247622	na upit
PG 11	2 x	6,0	6,5	24,0	30,0	4247623	on request
PG 11	2 x	7,0	6,5	24,0	30,0	4247624	na upit
PG 11	3 x	5,0	6,5	24,0	30,0	4247625	on request
PG 13	2 x	3,0	6,5	22,0	28,0	4247626	na upit
PG 13	2 x	5,0	6,5	22,0	28,0	4247627	on request
PG 13	2 x	6,0	6,5	22,0	28,0	4247628	na upit
PG 13	3 x	2,0	6,5	22,0	28,0	4247629	on request
PG 13	3 x	3,0	6,5	22,0	28,0	4247630	na upit
PG 13	3 x	4,0	6,5	22,0	28,0	4247631	on request
PG 13	3 x	5,0	6,5	22,0	28,0	4247632	na upit
PG 13	4 x	3,0	6,5	22,0	28,0	4247633	on request
PG 13	4 x	4,0	6,5	22,0	28,0	4247634	na upit
PG 13	6 x	3,5	6,5	22,0	28,0	4247635	on request
PG 13	10 x	2,0	6,5	22,0	28,0	4247636	na upit
PG 13	3 x	5,3	6,5	24,0	30,0	4247637	on request


vanjski navoj External thread	količina Quantity	promjer otvora mm Hole diameter mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H) mm Across Flats (H) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 13	3 x	6,0	6,5	24,0	30,0	4247638	na upit
PG 13	4 x	5,0	6,5	24,0	30,0	4247639	on request
PG 13	4 x	5,3	6,5	24,0	30,0	4247640	na upit
PG 16	2 x	4,0	6,5	24,0	30,0	4247641	on request
PG 16	2 x	5,0	6,5	24,0	30,0	4247642	na upit
PG 16	2 x	6,0	6,5	24,0	30,0	4247643	on request
PG 16	2 x	7,0	6,5	24,0	30,0	4247644	na upit
PG 16	3 x	3,0	6,5	24,0	30,0	4247645	on request
PG 16	3 x	4,0	6,5	24,0	30,0	4247646	na upit
PG 16	3 x	5,0	6,5	24,0	30,0	4247647	on request
PG 16	3 x	5,6	6,5	24,0	30,0	4247648	na upit
PG 16	3 x	6,0	6,5	24,0	30,0	4247649	on request
PG 16	3 x	8,0	6,5	24,0	30,0	4247650	na upit
PG 16	4 x	4,0	6,5	24,0	30,0	4247651	on request
PG 16	5 x	4,0	6,5	24,0	30,0	4247652	na upit
PG 16	6 x	4,0	6,5	24,0	30,0	4247653	on request
PG 16	2 x	8,0	7,0	30,0	35,0	4247654	na upit
PG 16	2 x	9,0	7,0	30,0	35,0	4247655	on request
PG 16	3 x	7,0	7,0	30,0	35,0	4247656	na upit
PG 16	4 x	5,0	7,0	30,0	35,0	4247657	on request
PG 16	4 x	6,0	7,0	30,0	35,0	4247658	na upit
PG 16	5 x	5,0	7,0	30,0	35,0	4247659	on request
PG 16	7 x	4,0	7,0	30,0	35,0	4247660	na upit
PG 21	2 x	4,5	7,0	30,0	35,0	4247661	on request
PG 21	2 x	8,0	7,0	30,0	35,0	4247662	na upit
PG 21	3 x	7,0	7,0	30,0	35,0	4247663	on request
PG 21	3 x	8,0	7,0	30,0	35,0	4247664	na upit
PG 21	4 x	5,0	7,0	30,0	35,0	4247665	on request
PG 21	4 x	6,0	7,0	30,0	35,0	4247666	na upit
PG 21	5 x	5,0	7,0	30,0	35,0	4247667	on request
PG 21	5 x	6,0	7,0	30,0	35,0	4247668	na upit
PG 21	5 x	6,5	7,0	30,0	35,0	4247669	on request
PG 21	6 x	4,0	7,0	30,0	35,0	4247670	na upit
PG 21	6 x	5,0	7,0	30,0	35,0	4247671	on request
PG 21	8 x	4,0	7,0	30,0	35,0	4247672	na upit
PG 21	8 x	5,0	7,0	30,0	35,0	4247673	on request
PG 21	21 x	2,0	7,0	30,0	35,0	4247674	na upit
PG 21	2 x	8,7	8,0	40,0	43,0	4247675	on request
PG 21	2 x	9,0	8,0	40,0	43,0	4247676	na upit
PG 21	2 x	11,0	8,0	40,0	43,0	4247677	on request
PG 21	3 x	9,0	8,0	40,0	43,0	4247678	na upit
PG 21	4 x	7,5	8,0	40,0	43,0	4247679	on request
PG 21	4 x	8,0	8,0	40,0	43,0	4247680	na upit
PG 21	6 x	6,0	8,0	40,0	43,0	4247681	on request
PG 21	6 x	6,5	8,0	40,0	43,0	4247682	na upit
PG 21	6 x	7,0	8,0	40,0	43,0	4247683	on request
PG 21	7 x	6,0	8,0	40,0	43,0	4247684	na upit
PG 21	11 x	5,0	8,0	40,0	43,0	4247685	on request
PG 21	28 x	3,0	8,0	40,0	43,0	4247686	na upit
PG 29	2 x	9,0	8,0	40,0	43,0	4247687	on request
PG 29	2 x	11,0	8,0	40,0	43,0	4247688	na upit
PG 29	2 x	12,0	8,0	40,0	43,0	4247689	on request
PG 29	3 x	9,0	8,0	40,0	43,0	4247690	na upit
PG 29	3 x	11,0	8,0	40,0	43,0	4247691	on request
PG 29	4 x	8,0	8,0	40,0	43,0	4247692	na upit
PG 29	4 x	9,0	8,0	40,0	43,0	4247693	on request
PG 29	4 x	10,0	8,0	40,0	43,0	4247694	na upit
PG 29	6 x	6,0	8,0	40,0	43,0	4247695	on request
PG 29	6 x	6,5	8,0	40,0	43,0	4247696	na upit
PG 29	6 x	7,0	8,0	40,0	43,0	4247697	on request
PG 29	7 x	6,0	8,0	40,0	43,0	4247698	na upit
PG 29	7 x	7,0	8,0	40,0	43,0	4247699	on request
PG 29	8 x	5,0	8,0	40,0	43,0	4247700	na upit
PG 29	8 x	6,0	8,0	40,0	43,0	4247701	on request
PG 29	10 x	6,0	8,0	40,0	43,0	4247702	na upit
PG 29	11 x	5,0	8,0	40,0	43,0	4247703	on request
PG 29	28 x	3,0	8,0	40,0	43,0	4247704	na upit

Kabelska uvodnica ATEX Ex e

nehrđajući čelik 1.4404, INOX 316L, metrički navoj, kratki

Cable gland ATEX Ex e

stainless steel 1.4404, INOX 316L, metric thread, short





RoHS | IP 68 | EN 50262

Materijal:
- 1/3: tijelo kabelske uvodnice/ glava: nehrđajući čelik 1.4404, INOX 316L
- 2: stezni prsten: poliamid 6
- 4: brtveni prsten za vanjski navoj: nitril
- 5: brtva: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- kratki navoj
- raspoloživa sa redukcijskom brtvom

Eigenschaften:
- maksimalna zaštita od izvlačenja kabela
- nepropusnost za vodu i plinove
- dodatni brtveni prsten (4) od nitrila na tijelu kabelske uvodnice

Pribor (vidi poglavlje…):
- Matice (3.3)
- Montažni alat Mon.Za (3.1)

Upotreba:
- strojevi i uređaji
- tehnologija automatizacije
- prehrambena industrija
- Offshore uređaji
- vjetroelektrane

Material:
- 1/3: Gland element/Cap nut: stainless steel 1.4404, INOX 316L
- 2: Clamping shell: Polyamide 6
- 4: Sealing-Ring for External thread: Nitrile
- 5: Sealing: Neoprene

Temperture range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: metric
- short thread
- reduction sealing insert

Characteristics:
- maximum strain relief through clamp lamella
- gas and water-tight
- additional Nitrile sealing-ring (4) on the gland element

Accessories (see chapter…):
- lock nuts (3.3)
- Mounting tool Mon.Za (3.1)

Applications:
- Machine and apparatus construction
- Automation technology
- Food Industries
- Off-Shore apparatus
- Wind power station

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	SW mm SW mm	broj artikla nehrđajući čelik Art. no. stainless steel	JP kom. PU pcs.
M 12 x 1,5	2,5 - 6,5	5,0	14,0	4108712	50
M 16 x 1,5	4,0 - 9,5	5,0	19,0	4108716	50
M 20 x 1,5	7,0 - 13,0	6,0	22,0	4108720	50
M 25 x 1,5	8,0 - 16,0	7,0	28,0	4108725	25
M 32 x 1,5	11,0 - 21,0	8,0	36,0	4108732	20
M 40 x 1,5	15,0 - 27,0	8,0	42,0	4108740	10
M 50 x 1,5	22,0 - 35,0	9,0	55,0	4108750	5
M 63 x 1,5	35,0 - 48,0	10,0	65,0	4108763	5


Kabelska uvodnica ATEX Ex e WADI-TEC

nehrđajući čelik 1.4404, INOX 316L
ECA-stezni prsten
metrički navoj, dugi

Cable gland ATEX Ex e WADI-TEC

Stainless steel 1.4404, INOX 316L
ECA-Clamping-Ring
metric thread, long

RoHS | Ex | IP 68 | IP 66 | PG | EN 50262





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: nehrđajući čelik 1.4404, INOX 316L
- 2: brtva: elastomer
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički
- dugi navoj

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: Stainless steel 1.4404, INOX 316L
- 2: Sealing: Elastomere
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric
- long thread

Characteristics:

Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla nehrđajući čelik Art.-No. stainless steel	JP kom. PU pcs.
M 12 x 1,5	3,0 - 6,0	13,0	14,0	14,0	33,0	4222501	50
M 16 x 1,5	3,0 - 6,0	13,0	14,0	18,0	33,0	4222502	50
M 16 x 1,5	5,0 - 8,0	13,0	17,0	18,0	33,0	4222503	50
M 20 x 1,5	6,0 - 10,0	13,0	20,0	22,0	34,0	4222504	50
M 20 x 1,5	8,0 - 12,0	13,0	22,0	22,0	35,0	4222505	50
M 25 x 1,5	9,5 - 14,0	14,0	24,0	27,0	37,0	4222506	20
M 25 x 1,5	11,5 - 18,0	14,0	30,0	30,0	43,0	4222507	20
M 32 x 1,5	11,5 - 18,0	14,5	30,0	34,0	44,0	4222508	20
M 32 x 1,5	15,0 - 24,0	14,5	40,0	40,0	51,0	4222509	20
M 40 x 1,5	15,0 - 24,0	14,5	40,0	42,0	51,0	4222510	20
M 50 x 1,5	23,0 - 30,0	15,5	50,0	55,0	57,0	4222511	10
M 63 x 1,5	26,0 - 35,0	16,5	58,0	70,0	64,0	4222512	5


Kabelska uvodnica ATEX Ex e WADI-TEC

nehrđajući čelik 1.4404, INOX 316L
ECA-stezni prsten
PG-navoj, lang

Cable gland ATEX Ex e WADI-TEC

Stainless steel 1.4404, INOX 316L
ECA-Clamping-Ring
PG-thread, long

RoHS | Ex | IP 68 | IP 66 | PG





Materijal:
- 1/4: tijelo kabelske uvodnice / glava: nehrđajući čelik 1.4404, INOX 316L
- 2: brtva: elastomer
- 3: ECA-stezni prsten: polikarbonat
- 5: O-brtva: nitril

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: PG
- dugi navoj

Svojstva:

certifikat:	LCIE 99 ATEX 6030 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4: Gland element/Cap nut: Stainless steel 1.4404, INOX 316L
- 2: Sealing: Elastomere
- 3: ECA-Clamping-Ring: Polycarbonate
- 5: O-ring: Nitrile

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: PG
- long thread

Characteristics:


Certificate:	LCIE 99 ATEX 6030 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	za kabel promjera mm Clamping range mm	duljina navoja (E) mm Thread length (E) mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H4) mm Across Flats (H4) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla nehrđajući čelik Art.-No. stainless steel	JP kom. PU pcs.
PG 7	3,0 - 6,0	15,0	14,0	14,0	34,0	4222521	50
PG 9	5,0 - 8,0	15,0	17,0	17,0	34,0	4222522	50
PG 11	6,0 - 10,0	15,0	20,0	20,0	35,0	4222523	50
PG 13	8,0 - 12,0	15,0	22,0	22,0	36,5	4222524	50
PG 16	9,5 - 14,0	15,0	24,0	24,0	38,5	4222525	25
PG 21	11,5 - 18,0	15,0	30,0	30,0	43,0	4222526	20
PG 29	15,0 - 24,0	15,0	40,0	40,0	50,0	4222527	15
PG 36	23,0 - 30,0	18,0	50,0	50,0	59,0	4222528	10
PG 42	26,0 - 35,0	18,0	58,0	58,0	65,0	4222529	10
PG 48	35,0 - 40,0	18,0	64,0	64,0	67,0	4222530	10

Kabelska uvodnica
ATEX Ex d/e 1F
mesing niklani/mesing
metrički navoj

Cable gland
ATEX Ex d/e 1F
nickel-plated brass/blank
metric thread





RoHS | Ex | IP 68 | IP 66 | PG | EN 50262

Materijal:
- 1/5: tijelo uvodnice: mesing niklani/mesing
- 2: pritisni prsten: polikarbonat
- 3: brtva: neopren
- 4: O-brtva: nitril

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20°C do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- za neekranizirane kabele
- 1F: brtva vanjskog omotača

Svojstva:
certifikat: LCIE 05 ATEX 6146 X
tip zaštite: Ex d/e
testni standard: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II C
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/5: Gland element: nickel-plated brass/blank
- 2: pressure ring: Polycarbonate
- 3: Sealing: Neoprene
- 4: O-ring: Nitrile

Note:
Also available with viton sealing
viton temperature: -20°C to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- for non armoured cable
- 1F: sealing of the exterior sheathing

Characteristics:
Certificate: LCIE 05 ATEX 6146 X
Type of protection: Ex d/e
Test standard: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II C
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	br. No.	promjer brtve min. max. mm mm Sealing min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
M 12 x 1,5	4	4,0 - 8,0	17,0	17,0	16,0	42,0	4111129	4111120	1
M 16 x 1,5	4	4,0 - 8,0	20,0	17,0	16,0	42,0	4111159	4111150	1
M 16 x 1,5	5	7,0 - 12,0	20,0	20,0	16,0	39,0	4111169	4111160	1
M 20 x 1,5	5	7,0 - 12,0	24,0	20,0	16,0	39,0	4111209	4111200	1
M 20 x 1,5	6	9,0 - 16,0	24,0	24,0	16,0	43,0	4111219	4111210	1
M 25 x 1,5	5	7,0 - 12,0	28,0	20,0	16,0	39,0	4111259	4111250	1
M 25 x 1,5	6	9,0 - 16,0	28,0	24,0	16,0	43,0	4111269	4111260	1
M 25 x 1,5	7	13,0 - 21,0	30,0	30,0	16,0	44,0	4111279	4111270	1
M 32 x 1,5	7	13,0 - 21,0	36,0	30,0	16,0	44,0	4111329	4111320	1
M 32 x 1,5	8	17,0 - 27,5	40,0	40,0	16,0	61,0	4111339	4111330	1
M 40 x 1,5	8	17,0 - 27,5	44,0	40,0	16,0	61,0	4111409	4111400	1
M 40 x 1,5	9	22,0 - 34,0	48,0	48,0	16,0	67,0	4111419	4111410	1
M 50 x 1,5	9	22,0 - 34,0	55,0	48,0	16,0	67,0	4111509	4111500	1
M 50 x 1,5	10	28,0 - 41,0	55,0	55,0	16,0	72,0	4111519	4111510	1
M 63 x 1,5	11	34,0 - 48,0	65,0	64,0	16,0	82,0	4111639	4111630	1
M 63 x 1,5	12	39,0 - 54,0	70,0	70,0	16,0	84,0	4111649	4111640	1
M 75 x 1,5	12	39,0 - 54,0	80,0	70,0	16,0	84,0	4111759	4111750	1
M 75 x 1,5	13	48,0 - 65,0	85,0	90,0	18,0	100,0	4111769	4111760	1
M 80 x 1,5	13	48,0 - 65,0	85,0	90,0	18,0	100,0	4111809	4111800	1
M 80 x 1,5	14	55,0 - 74,0	95,0	100,0	20,0	112,0	4111819	4111810	1
M 90 x 1,5	14	55,0 - 74,0	95,0	100,0	20,0	112,0	4111909	4111900	1
M 90 x 1,5	15	65,0 - 83,0	110,0	125,0	22,0	123,0	4111919	4111910	1
M 100 x 1,5	15	65,0 - 83,0	110,0	125,0	22,0	123,0	4111989	4111980	1
M 100 x 1,5	16	74,0 - 83,0	120,0	125,0	22,0	123,0	4111999	4111990	1

Kabelska uvodnica ATEX Ex e 1F

mesing niklani/mesing
PG-navoj

Cable gland ATEX Ex e 1F

nickel-plated brass/blank
PG-thread





RoHS | IP 68 | IP 66

Materijal:
- 1/5: tijelo uvodnice: mesing niklani/mesing
- 2: pritisni prsten: polikarbonat
- 3: brtva: neopren
- 4: O-brtva: nitril

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20°C do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- za neekranizirane kabele
- 1F: brtva vanjskog omotača

Svojstva:

certifikat:	LCIE 05 ATEX 6146 X
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Napomena:
PG navoj samo Ex e

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/5: Gland element: nickel-plated brass/blank
- 2: pressure ring: Polycarbonate
- 3: Sealing: Neoprene
- 4: O-ring: Nitrile

Note:
Also available with viton sealing
viton temperature: -20°C to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- for non armoured cable
- 1F: sealing of the exterior sheathing

Characteristics:

Certificate:	LCIE 05 ATEX 6146 X
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Note:
PG thread just only Ex e

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	br. No.	promjer brtve min. max. mm mm Sealing min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
PG 7	4	4,0 - 8,0	17,0	17,0	16,0	42,0	4121079	4121070	1
PG 9	5	7,0 - 12,0	20,0	20,0	16,0	39,0	4121099	4121090	1
PG 11	5	7,0 - 12,0	22,0	20,0	16,0	39,0	4121119	4121110	1
PG 13	5	7,0 - 12,0	24,0	20,0	16,0	39,0	4121139	4121130	1
PG 13	6	9,0 - 16,0	24,0	24,0	16,0	43,0	4121149	4121140	1
PG 16	6	9,0 - 16,0	26,0	24,0	16,0	43,0	4121169	4121160	1
PG 21	7	13,0 - 20,5	30,0	30,0	16,0	44,0	4121219	4121210	1
PG 29	8	17,0 - 27,0	40,0	40,0	16,0	61,0	4121299	4121290	1
PG 29	9	22,0 - 32,0	48,0	48,0	16,0	67,0	4121309	4121300	1
PG 36	9	22,0 - 34,0	50,0	48,0	16,0	67,0	4121369	4121360	1
PG 36	10	28,0 - 41,0	55,0	55,0	16,0	72,0	4121379	4121370	1
PG 42	11	34,0 - 47,0	64,0	64,0	16,0	82,0	4121429	4121420	1
PG 48	12	39,0 - 53,0	70,0	70,0	16,0	84,0	4121489	4121480	1
G 2 1/2“	13	48,0 - 65,0	85,0	90,0	18,0	100,0	4121509	4121500	1
G 3“	14	55,0 - 71,0	95,0	100,0	20,0	112,0	4121539	4121530	1
G 3“	15	65,0 - 77,0	110,0	125,0	22,0	123,0	4121549	4121540	1
G 3 1/2“	15	65,0 - 79,0	110,0	125,0	22,0	123,0	4121559	4121550	1
G 3 1/2“	16	74,0 - 89,0	120,0	125,0	22,0	123,0	4121569	4121560	1


Kabelska uvodnica ATEX Ex d/e 1F

mesing niklani/mesing
NPT-navoj

Cable gland ATEX Ex d/e 1F

nickel-plated brass/blank
NPT-thread

RoHS | Ex | IP 68 | IP 66 | PG





Materijal:
- 1/5: tijelo uvodnice: mesing niklani/mesing
- 2: pritisni prsten: polikarbonat
- 3: brtva: neopren
- 4: O-brtva: nitril

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20°C do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: NPT
- za neekranizirane kabele
- 1F: brtva vanjskog omotača

Svojstva:
certifikat: LCIE 05 ATEX 6146 X
tip zaštite: Ex d/e
testni standard: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II C
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/5: Gland element: nickel-plated brass/blank
- 2: pressure ring: Polycarbonate
- 3: Sealing: Neoprene
- 4: O-ring: Nitrile

Note:
Also available with viton sealing
viton temperature: -20°C to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: NPT
- for non armoured cable
- 1F: sealing of the exterior sheathing

Characteristics:
Certificate: LCIE 05 ATEX 6146 X
Type of protection: Ex d/e
Test standard: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II C
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	br. No.	promjer brtve min. max. mm mm Sealing min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
NPT 1/4“	4	4,0 - 8,0	17,0	17,0	16,0	42,0	4131029	4131020	1
NPT 3/8“	4	4,0 - 8,0	20,0	17,0	16,0	42,0	4131039	4131030	1
NPT 1/2“	4	4,0 - 8,0	24,0	17,0	20,0	46,0	4131049	4131040	1
NPT 3/8“	5	7,0 - 12,0	20,0	20,0	16,0	39,0	4131059	4131050	1
NPT 1/2“	5	7,0 - 12,0	24,0	20,0	20,0	43,0	4131109	4131100	1
NPT 1/2“	6	9,0 - 16,0	24,0	24,0	20,0	47,0	4131119	4131110	1
NPT 3/4“	5	7,0 - 12,0	28,0	20,0	16,0	43,0	4131209	4131200	1
NPT 3/4“	6	9,0 - 16,0	28,0	24,0	20,0	47,0	4131219	4131210	1
NPT 3/4“	7	13,0 - 20,5	30,0	30,0	20,0	48,0	4131229	4131220	1
NPT 1“	7	13,0 - 21,0	36,0	30,0	25,0	53,0	4131309	4131300	1
NPT 1“	8	17,0 - 27,0	40,0	40,0	25,0	70,0	4131319	4131310	1
NPT 1 1/4“	8	17,0 - 27,5	44,0	40,0	25,0	70,0	4131349	4131340	1
NPT 1 1/4“	9	22,0 - 34,0	48,0	48,0	25,0	76,0	4131359	4131350	1
NPT 1 1/2“	9	22,0 - 34,0	55,0	48,0	26,0	77,0	4131369	4131360	1
NPT 1 1/2“	10	28,0 - 41,0	55,0	55,0	26,0	82,0	4131379	4131370	1
NPT 2“	11	34,0 - 47,5	68,0	64,0	27,0	83,0	4131409	4131400	1
NPT 2“	12	39,0 - 53,5	70,0	70,0	27,0	95,0	4131419	4131410	1
NPT 2 1/2“	12	39,0 - 54,0	80,0	70,0	40,0	108,0	4131459	4131450	1
NPT 2 1/2“	13	48,0 - 64,5	85,0	90,0	40,0	122,0	4131469	4131460	1
NPT 3“	14	55,0 - 71,0	95,0	100,0	42,0	134,0	4131509	4131500	1
NPT 3“	15	65,0 - 79,0	110,0	125,0	42,0	143,0	4131519	4131510	1
NPT 3 1/2“	15	65,0 - 79,0	110,0	125,0	43,0	144,0	4131559	4131550	1
NPT 3 1/2“	16	74,0 - 89,0	120,0	125,0	43,0	144,0	4131569	4131560	1


Kabelska uvodnica ATEX Ex d/e 3F

mesing niklani/mesing
metrički navoj

Cable gland ATEX Ex d/e 3F

nickel-plated brass/blank
metric thread





RoHS | Ex | IP 68 | IP 66 | PG | EN 50262

Materijal:
- 1/2/7: tijelo uvodnice: mesing niklani/mesing
- 3: pritisni prsten: polikarbonat
- 4/6: O-brtva: nitril
- 5: brtva: neopren

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20°C do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- za ekranizirane kablove
- 3F: brtva unutarnjeg kabelskog omotača
  uzemljenje omotača
  sa zaštitom od izvlačenja omotača

Svojstva:

certifikat:	LCIE 05 ATEX 6146 X
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/2/7: Gland element: nickel-plated brass/blank
- 3: pressure ring: Polycarbonate
- 4/6: O-ring: Nitrile
- 5: Sealing: Neoprene

Note:
Also available with viton sealing
viton temperature: -20 to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- for screened (armoured) cables
- 3F: Sealing of the inner cable sheath
  Grounding of the sheathing
  Strain relief of the sheathing

Characteristics:

Certificate:	LCIE 05 ATEX 6146 X
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


3.4


vanjski navoj External thread	br. No.	vanjski omotač min. max. mm mm exterior sheath min. max. mm mm	F max. mm F max. mm	promjer brtve unutarnjeg omotača min. max. mm mm Sealing inner sheath min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ključ veličine (H3) mm Across Flats (H3) mm	E mm E mm	L mm L mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
M 12 x 1,5	5	7,0 - 12,0	1,0	4,0 - 7,0	18,0	20,0	20,0	16,0	47,0	4113129	4113120	1
M 16 x 1,5	5	7,0 - 12,0	1,0	4,0 - 8,0	20,0	20,0	20,0	16,0	47,0	4113169	4113160	1
M 16 x 1,5	6	9,0 - 16,0	1,3	6,0 - 12,0	18,0	24,0	24,0	16,0	51,0	4113179	4113170	1
M 20 x 1,5	5	7,0 - 12,0	1,0	4,0 - 8,0	24,0	20,0	20,0	16,0	47,0	4113209	4113200	1
M 20 x 1,5	6	9,0 - 16,0	1,3	6,0 - 12,0	24,0	24,0	24,0	16,0	51,0	4113219	4113210	1
M 20 x 1,5	7	13,0 - 21,0	1,3	8,5 - 15,0	28,0	30,0	30,0	16,0	51,0	4113229	4113220	1
M 25 x 1,5	6	9,0 - 16,0	1,3	6,0 - 12,0	28,0	24,0	24,0	16,0	51,0	4113259	4113250	1
M 25 x 1,5	7	13,0 - 21,0	1,3	8,5 - 15,5	30,0	30,0	30,0	16,0	51,0	4113269	4113260	1
M 25 x 1,5	8	17,0 - 27,5	1,6	12,0 - 19,5	36,0	40,0	40,0	16,0	60,0	4113279	4113270	1
M 32 x 1,5	8	17,0 - 27,5	1,6	12,0 - 20,5	40,0	40,0	40,0	16,0	60,0	4113329	4113320	1
M 32 x 1,5	9	22,0 - 34,0	2,0	16,0 - 25,5	44,0	48,0	48,0	16,0	66,0	4113339	4113330	1
M 40 x 1,5	9	22,0 - 34,0	2,0	16,0 - 27,5	48,0	48,0	48,0	16,0	66,0	4113409	4113400	1
M 40 x 1,5	10	28,0 - 41,0	2,0	21,0 - 33,0	50,0	55,0	55,0	16,0	68,0	4113419	4113410	1
M 50 x 1,5	10	28,0 - 41,0	2,0	21,0 - 34,0	55,0	55,0	55,0	16,0	68,0	4113509	4113500	1
M 50 x 1,5	11	34,0 - 48,0	2,5	27,0 - 41,0	64,0	64,0	64,0	16,0	73,0	4113519	4113510	1
M 63 x 1,5	12	39,0 - 54,0	2,5	33,0 - 46,0	70,0	70,0	70,0	16,0	75,0	4113639	4113630	1
M 63 x 1,5	13	48,0 - 65,0	2,5	40,0 - 54,0	80,0	85,0	85,0	16,0	86,0	4113649	4113640	1
M 75 x 1,5	13	48,0 - 65,0	2,5	40,0 - 54,0	85,0	85,0	85,0	18,0	86,0	4113759	4113750	1
M 75 x 1,5	14	55,0 - 74,0	2,5	47,0 - 65,0	90,0	95,0	95,0	18,0	95,0	4113769	4113760	1
M 80 x 1,5	14	55,0 - 74,0	2,5	47,0 - 65,0	95,0	95,0	95,0	20,0	95,0	4113809	4113800	1
M 80 x 2,0	15	65,0 - 83,0	3,15	54,0 - 71,0	100,0	110,0	110,0	20,0	107,0	4113819	4113810	1
M 90 x 2,0	15	65,0 - 83,0	3,15	54,0 - 74,0	110,0	110,0	110,0	22,0	107,0	4113909	4113900	1
M 90 x 2,0	16	74,0 - 93,0	3,15	63,0 - 79,0	110,0	120,0	120,0	22,0	107,0	4113919	4113910	1
M 100 x 2,0	16	74,0 - 93,0	3,15	63,0 - 82,0	120,0	120,0	120,0	22,0	107,0	4113999	4113990	1

Kabelska uvodnica
ATEX Ex e 3F
mesing niklani/mesing
PG-navoj

Cable gland
ATEX Ex e 3F
nickel-plated brass/blank
PG-thread

RoHS | Ex | IP 68 | IP 66 | PG





Materijal:
- 1/2/7: tijelo uvodnice: mesing niklani/mesing
- 3: pritisni prsten: polikarbonat
- 4/6: O-brtva: nitril
- 5: brtva: neopren

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20°C do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- za ekranizirane kablove
- 3F: brtva unutarnjeg kabelskog omotača
  uzemljenje omotača
  sa zaštitom od izvlačenja omotača

Svojstva:
certifikat: LCIE 05 ATEX 6146 X
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II C
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2 , 21, 22

Napomena:
PG navoj samo Ex e

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/2/7: Gland element: nickel-plated brass/blank
- 3: pressure ring: Polycarbonate
- 4/6: O-ring: Nitrile
- 5: Sealing: Neoprene

Note:
Also available with viton sealing
viton temperature: -20 to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- for screened (armoured) cables
- 3F: Sealing of the inner cable sheath
  Grounding of the sheathing
  Strain relief of the sheathing

Characteristics:
Certificate: LCIE 05 ATEX 6146 X
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II C
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Note:
PG thread just only Ex e

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	br. No.	vanjski omotač min. max. mm mm exterior sheath min. max. mm mm	F max. mm F max. mm	promjer brtve unutarnjeg omotača min. max. mm mm Sealing inner sheath min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ključ veličine (H3) mm Across Flats (H3) mm	E mm E mm	L mm L mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
PG 7	5	7,0 - 12,0	1,0	4,0 - 6,5	18,0	20,0	20,0	16,0	47,0	4123079	4123070	1
PG 9	5	7,0 - 12,0	1,0	4,0 - 8,0	20,0	20,0	20,0	16,0	47,0	4123099	4123090	1
PG 9	6	9,0 - 16,0	1,3	6,0 - 11,5	22,0	24,0	24,0	16,0	51,0	4123109	4123100	1
PG 11	5	7,0 - 12,0	1,0	4,0 - 8,0	22,0	20,0	20,0	16,0	47,0	4123119	4123110	1
PG 11	6	9,0 - 16,0	1,3	6,0 - 12,0	22,0	24,0	24,0	16,0	51,0	4123129	4123120	1
PG 13	6	9,0 - 16,0	1,3	6,0 - 12,0	24,0	24,0	24,0	16,0	51,0	4123139	4123130	1
PG 13	7	13,0 - 21,0	1,3	8,5 - 15,0	24,0	30,0	30,0	16,0	51,0	4123149	4123140	1
PG 16	7	13,0 - 21,0	1,3	8,5 - 15,5	27,0	30,0	30,0	16,0	51,0	4123169	4123160	1
PG 16	8	17,0 - 27,5	1,6	12,0 - 17,5	30,0	40,0	40,0	16,0	60,0	4123179	4123170	1
PG 21	8	17,0 - 27,5	1,6	12,0 - 20,5	34,0	40,0	40,0	16,0	60,0	4123219	4123210	1
PG 29	9	22,0 - 34,0	2,0	16,0 - 25,5	44,0	48,0	48,0	16,0	66,0	4123299	4123290	1
PG 29	10	28,0 - 41,0	2,0	21,0 - 32,0	50,0	55,0	55,0	16,0	68,0	4123309	4123300	1
PG 36	10	28,0 - 41,0	2,0	21,0 - 34,0	55,0	55,0	55,0	16,0	68,0	4123369	4123360	1
PG 36	11	34,0 - 48,0	2,5	27,0 - 41,0	55,0	64,0	64,0	16,0	73,0	4123379	4123370	1
PG 42	12	39,0 - 54,0	2,5	33,0 - 46,0	64,0	70,0	70,0	16,0	75,0	4123429	4123420	1
PG 48	13	48,0 - 65,0	2,5	40,0 - 53,5	70,0	85,0	85,0	16,0	86,0	4123489	4123480	1
G 2 1/2"	14	55,0 - 74,0	2,5	47,0 - 65,0	90,0	95,0	95,0	20,0	95,0	4123519	4123510	1
G 3"	15	65,0 - 83,0	3,2	54,0 - 71,0	100,0	110,0	110,0	20,0	107,0	4123539	4123530	1
G 3"	16	74,0 - 93,0	3,2	63,0 - 79,0	110,0	120,0	120,0	22,0	107,0	4123549	4123540	1


Kabelska uvodnica ATEX Ex d/e 3F

mesing niklani/mesing
NPT-navoj

Cable gland ATEX Ex d/e 3F

nickel-plated brass/blank
NPT-thread





RoHS | Ex | IP 68 | IP 66 | PG

Materijal:
- 1/2/7: tijelo uvodnice: mesing niklani/mesing
- 3: pritisni prsten: polikarbonat
- 4/6: O-brtva: nitril
- 5: brtva: neopren

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20°C do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: NPT
- za ekranizirane kablove
- 3F: brtva unutarnjeg kabelskog omotača
  uzemljenje omotača
  sa zaštitom od izvlačenja omotača

Svojstva:

certifikat:	LCIE 05 ATEX 6146 X
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/2/7: Gland element: nickel-plated brass/blank
- 3: pressure ring: Polycarbonate
- 4/6: O-ring: Nitrile
- 5: Sealing: Neoprene

Note:
Also available with viton sealing
viton temperature: -20 to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: NPT
- for screened (armoured) cables
- 3F: Sealing of the inner cable sheath
  Grounding of the sheathing
  Strain relief of the sheathing

Characteristics:

Certificate:	LCIE 05 ATEX 6146 X
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

3.4


vanjski navoj External thread	br. No.	vanjski omotač min. max. mm mm exterior sheath min. max. mm mm	F max. mm F max. mm	promjer brtve unutarnjeg omotača min. max. mm mm Sealing inner sheath min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ključ veličine (H3) mm Across Flats (H3) mm	E mm E mm	L mm L mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
NPT 1/4“	5	7,0 - 12,0	1,0	4,0 - 7,0	18,0	20,0	20,0	16,0	47,0	4133019	4133010	1
NPT 3/8“	5	7,0 - 12,0	1,0	4,0 - 8,0	20,0	20,0	20,0	16,0	47,0	4133059	4133050	1
NPT 3/8“	6	9,0 - 16,0	1,3	6,0 - 12,0	22,0	24,0	24,0	16,0	51,0	4133069	4133060	1
NPT 1/2“	5	7,0 - 12,0	1,0	4,0 - 8,0	24,0	20,0	20,0	20,0	51,0	4133109	4133100	1
NPT 1/2“	6	9,0 - 16,0	1,3	6,0 - 12,0	24,0	24,0	24,0	20,0	55,0	4133119	4133110	1
NPT 1/2“	7	13,0 - 21,0	1,3	8,5 - 15,0	24,0	30,0	30,0	20,0	55,0	4133129	4133120	1
NPT 3/4“	6	9,0 - 16,0	1,3	6,0 - 12,0	28,0	24,0	24,0	20,0	55,0	4133209	4133200	1
NPT 3/4“	7	13,0 - 21,0	1,3	8,5 - 15,5	30,0	30,0	30,0	20,0	55,0	4133219	4133210	1
NPT 3/4“	8	17,0 - 27,5	1,6	12,0 - 19,5	30,0	40,0	40,0	20,0	64,0	4133229	4133220	1
NPT 1“	8	17,0 - 27,5	1,6	12,0 - 20,5	36,0	40,0	40,0	25,0	64,0	4133309	4133300	1
NPT 1“	9	22,0 - 34,0	2,0	16,0 - 25,5	40,0	48,0	48,0	25,0	75,0	4133319	4133310	1
NPT 1 1/4“	9	22,0 - 34,0	2,0	16,0 - 27,5	44,0	48,0	48,0	25,0	75,0	4133349	4133340	1
NPT 1 1/4“	10	28,0 - 41,0	2,0	21,0 - 33,0	50,0	55,0	55,0	25,0	77,0	4133359	4133350	1
NPT 1 1/2“	10	28,0 - 41,0	2,0	21,0 - 34,0	55,0	55,0	55,0	26,0	77,0	4133369	4133360	1
NPT 1 1/2“	11	34,0 - 48,0	2,5	27,0 - 41,0	55,0	64,0	64,0	26,0	83,0	4133379	4133370	1
NPT 2“	12	39,0 - 54,0	2,5	33,0 - 46,0	65,0	70,0	70,0	27,0	86,0	4133409	4133400	1
NPT 2“	13	48,0 - 65,0	2,5	40,0 - 53,5	70,0	85,0	85,0	27,0	97,0	4133419	4133410	1
NPT 2 1/2“	13	48,0 - 65,0	2,5	40,0 - 54,0	80,0	85,0	85,0	40,0	108,0	4133459	4133450	1
NPT 2 1/2“	14	55,0 - 74,0	2,5	47,0 - 64,5	85,0	95,0	95,0	40,0	117,0	4133469	4133460	1
NPT 3“	15	65,0 - 83,0	3,2	54,0 - 71,0	100,0	110,0	110,0	42,0	129,0	4133509	4133500	1
NPT 3“	16	74,0 - 93,0	3,2	63,0 - 79,0	110,0	120,0	120,0	42,0	127,0	4133519	4133510	1


Kabelska uvodnica ATEX Ex d/e 4F

mesing niklani/mesing
metrički navoj

Cable gland ATEX Ex d/e 4F

nickel-plated brass/blank
metric thread





RoHS | Ex | IP 68 | IP 66 | PG | EN 50262

Materijal:
- 1/4/5/10: tijelo uvodnice:
  mesing niklani/mesing
- 2/6: pritisni prsten: polikarbonat
- 7/9: O-brtva: nitril
- 3/8: brtva: neopren

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20 do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- za ekranizirane kablove
- 4F: brtva unutarnjeg kabelskog omotača
  uzemljenje omotača
  sa zaštitom od izvlačenja omotača
  brtva vanjskog omotača

Svojstva:

certifikat:	LCIE 05 ATEX 6146 X
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4/5/10: Gland element:
  nickel-plated brass/blank
- 2/6: pressure ring: Polycarbonate
- 7/9: O-ring: Nitrile
- 3/8: Sealing: Neoprene

Note:
Also available with viton sealing
viton temperature: -20 to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- for screened (armoured) cables
- 4F: Sealing of the inner cable sheath
  Grounding of the sheathing
  Strain relief of the sheathing
  Sealing of the exterior sheathing

Characteristics:

Certificate:	LCIE 05 ATEX 6146 X
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


vanjski navoj External thread	br. No.	promjer brtve vanjskog omotača min. max. mm mm Sealing exterior sheath min. max. mm mm	F max. mm F max. mm	promjer brtve unutarnjeg omotača min. max. mm mm Sealing inner sheath min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ključ veličine (H3) mm Across Flats (H3) mm	ključ veličine (H4) mm Across Flats (H4) mm	E mm E mm	L mm L mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
M 12 x 1,5	5	7,0 - 12,0	1,0	4,0 - 7,0	18,0	20,0	20,0	20,0	16,0	67,0	4114129	4114120	1
M 16 x 1,5	5	7,0 - 12,0	1,0	4,0 - 8,0	20,0	20,0	20,0	20,0	16,0	67,0	4114169	4114160	1
M 16 x 1,5	6	9,0 - 16,0	1,3	6,0 - 12,0	18,0	24,0	24,0	24,0	16,0	71,0	4114179	4114170	1
M 20 x 1,5	5	7,0 - 12,0	1,0	4,0 - 8,0	24,0	20,0	20,0	20,0	16,0	67,0	4114209	4114200	1
M 20 x 1,5	6	9,0 - 16,0	1,3	6,0 - 12,0	24,0	24,0	24,0	24,0	16,0	71,0	4114219	4114210	1
M 20 x 1,5	7	13,0 - 21,0	1,3	8,5 - 15,0	28,0	30,0	30,0	30,0	16,0	72,0	4114229	4114220	1
M 25 x 1,5	6	9,0 - 16,0	1,3	6,0 - 12,0	28,0	24,0	24,0	24,0	16,0	71,0	4114259	4114250	1
M 25 x 1,5	7	13,0 - 21,0	1,3	8,5 - 15,5	30,0	30,0	30,0	30,0	16,0	72,0	4114269	4114260	1
M 25 x 1,5	8	17,0 - 27,5	1,6	12,0 - 19,5	36,0	40,0	40,0	40,0	16,0	89,0	4114279	4114270	1
M 32 x 1,5	8	17,0 - 27,5	1,6	12,0 - 20,5	40,0	40,0	40,0	40,0	16,0	89,0	4114329	4114320	1
M 32 x 1,5	9	22,0 - 34,0	2,0	16,0 - 25,5	44,0	48,0	48,0	48,0	16,0	95,0	4114339	4114330	1
M 40 x 1,5	9	22,0 - 34,0	2,0	16,0 - 27,5	48,0	48,0	48,0	48,0	16,0	95,0	4114409	4114400	1
M 40 x 1,5	10	28,0 - 41,0	2,0	21,0 - 33,0	50,0	55,0	55,0	55,0	16,0	100,0	4114419	4114410	1
M 50 x 1,5	10	28,0 - 41,0	2,0	21,0 - 34,0	55,0	55,0	55,0	55,0	16,0	100,0	4114509	4114500	1
M 50 x 1,5	11	34,0 - 48,0	2,5	27,0 - 41,0	64,0	64,0	64,0	64,0	16,0	110,0	4114519	4114510	1
M 63 x 1,5	12	39,0 - 54,0	2,5	33,0 - 46,0	70,0	70,0	70,0	70,0	16,0	112,0	4114639	4114630	1
M 63 x 1,5	13	48,0 - 65,0	2,5	40,0 - 54,0	80,0	85,0	85,0	90,0	16,0	128,0	4114649	4114640	1
M 75 x 1,5	13	48,0 - 65,0	2,5	40,0 - 54,0	85,0	85,0	85,0	90,0	18,0	128,0	4114759	4114750	1
M 75 x 1,5	14	55,0 - 74,0	2,5	47,0 - 65,0	90,0	95,0	95,0	100,0	18,0	140,0	4114769	4114760	1
M 80 x 2,0	14	55,0 - 74,0	2,5	47,0 - 65,0	95,0	95,0	95,0	100,0	20,0	140,0	4114809	4114800	1
M 80 x 2,0	15	65,0 - 83,0	3,2	54,0 - 71,0	100,0	110,0	110,0	125,0	20,0	151,0	4114819	4114810	1
M 90 x 2,0	15	65,0 - 83,0	3,2	54,0 - 74,0	110,0	110,0	110,0	125,0	22,0	151,0	4114909	4114900	1
M 90 x 2,0	16	74,0 - 93,0	3,2	63,0 - 79,0	110,0	120,0	120,0	125,0	22,0	151,0	4114919	4114910	1
M 100 x 2,0	16	74,0 - 93,0	3,2	63,0 - 82,0	120,0	120,0	120,0	125,0	22,0	151,0	4114999	4114990	1


Kabelska uvodnica ATEX Ex e 4F

mesing niklani/mesing
PG-navoj

Cable gland ATEX Ex e 4F

nickel-plated brass/blank
PG-thread





RoHS | Ex | IP 68 | IP 66 | PG

Materijal:
- 1/4/5/10: tijelo uvodnice: mesing niklani/mesing
- 2/6: pritisni prsten: poliKarbonat
- 7/9: O-brtva: nitril
- 3/8: brtva: neopren

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20 do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- za ekranizirane kablove
- 4F: brtva unutarnjeg kabelskog omotača
  uzemljenje omotača
  sa zaštitom od izvlačenja omotača
  brtva vanjskog omotača

Svojstva:
certifikat: LCIE 05 ATEX 6146 X
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II C
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2 , 21, 22

Napomena:
PG-navoj samo Ex e

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4/5/10: Gland element: nickel-plated brass/blank
- 2/6: pressure ring: Polycarbonate
- 7/9: O-ring: Nitrile
- 3/8: Sealing: Neoprene

Note:
Also available with viton sealing
viton temperature: -20 to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- for screened (armoured) cables
- 4F: Sealing of the inner cable sheath
  Grounding of the sheathing
  Strain relief of the sheathing
  Sealing of the exterior sheathing

Characteristics:
Certificate: LCIE 05 ATEX 6146 X
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II C
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Note:
PG-thread just only Ex e


Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations


3.4

vanjski navoj External thread	br. No.	promjer brtve vanjskog omotača min. max. mm mm Sealing exterior sheath min. max. mm mm	F max. mm F max. mm	promjer brtve unutarnjeg omotača min. max. mm mm Sealing inner sheath min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ključ veličine (H3) mm Across Flats (H3) mm	ključ veličine (H4) mm Across Flats (H4) mm	E mm E mm	L mm L mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
PG 9	5	7,0 - 12,0	1,0	4,0 - 8,0	20,0	20,0	20,0	20,0	16,0	67,0	4124099	4124090	1
PG 9	6	9,0 - 16,0	1,3	6,0 - 11,5	22,0	24,0	24,0	24,0	16,0	71,0	4124109	4124100	1
PG 11	5	7,0 - 12,0	1,0	4,0 - 8,0	22,0	20,0	20,0	20,0	16,0	67,0	4124119	4124110	1
PG 11	6	9,0 - 16,0	1,3	6,0 - 12,0	22,0	24,0	24,0	24,0	16,0	71,0	4124129	4124120	1
PG 13	6	9,0 - 16,0	1,3	6,0 - 12,0	24,0	24,0	24,0	24,0	16,0	71,0	4124139	4124130	1
PG 13	7	13,0 - 21,0	1,3	8,5 - 15,0	24,0	30,0	30,0	30,0	16,0	72,0	4124149	4124140	1
PG 16	7	13,0 - 21,0	1,3	8,5 - 15,5	27,0	30,0	30,0	30,0	16,0	72,0	4124169	4124160	1
PG 16	8	17,0 - 27,5	1,6	12,0 - 17,5	30,0	40,0	40,0	40,0	16,0	89,0	4124179	4124170	1
PG 21	8	17,0 - 27,5	1,6	12,0 - 20,5	34,0	40,0	40,0	40,0	16,0	89,0	4124219	4124210	1
PG 29	9	22,0 - 34,0	2,0	16,0 - 25,5	44,0	48,0	48,0	48,0	16,0	95,0	4124299	4124290	1
PG 29	10	28,0 - 41,0	2,0	21,0 - 32,0	50,0	55,0	55,0	55,0	16,0	100,0	4124309	4124300	1
PG 36	10	28,0 - 41,0	2,0	21,0 - 34,0	55,0	55,0	55,0	55,0	16,0	100,0	4124369	4124360	1
PG 36	11	34,0 - 48,0	2,5	27,0 - 41,0	55,0	64,0	64,0	64,0	16,0	110,0	4124379	4124370	1
PG 42	12	39,0 - 54,0	2,5	33,0 - 46,0	64,0	70,0	70,0	70,0	16,0	112,0	4124429	4124420	1
PG 48	13	48,0 - 65,0	2,5	40,0 - 53,5	70,0	85,0	85,0	90,0	16,0	128,0	4124489	4124480	1
G 2 1/2"	13	48,0 - 65,0	2,5	40,0 - 54,0	85,0	85,0	85,0	90,0	16,0	128,0	4124509	4124500	1
G 2 1/2"	14	55,0 - 74,0	2,5	47,0 - 65,0	90,0	95,0	95,0	100,0	20,0	140,0	4124519	4124510	1
G 3"	15	65,0 - 83,0	3,2	54,0 - 71,0	100,0	110,0	110,0	125,0	20,0	151,0	4124539	4124530	1
G 3"	16	74,0 - 93,0	3,2	63,0 - 79,0	110,0	120,0	120,0	125,0	22,0	151,0	4124549	4124540	1

Kabelska uvodnica
ATEX Ex d/e 4F
mesing niklani/mesing
NPT-navoj

Cable gland
ATEX Ex d/e 4F
nickel-plated brass/blank
NPT-thread





RoHS | IP 68 | IP 66

Materijal:
- 1/4/5/10: tijelo uvodnice:
  mesing niklani/mesing
- 2/6: pritisni prsten: polikarbonat
- 7/9: O-brtva: nitril
- 3/8: brtva: neopren

Napomena:
raspoloživa i sa Viton brtvom
temperatura za Viton: -20 do 200°C
nehrđajući čelik na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: NPT
- za ekranizirane kablove
- 4F: brtva unutarnjeg kabelskog omotača
  uzemljenje omotača
  sa zaštitom od izvlačenja omotača
  brtva vanjskog omotača

Svojstva:
certifikat: LCIE 05 ATEX 6146 X
tip zaštite: Ex d/e
testni standard: EN 60079-0,
EN 60079-1,
EN 60079-7,
EN 61241-0,
EN 61241-1
grupa uređaja: II C
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- 1/4/5/10: Gland element:
  nickel-plated brass/blank
- 2/6: pressure ring: Polycarbonate
- 7/9: O-ring: Nitrile
- 3/8: Sealing: Neoprene

Note:
Also available with viton sealing
viton temperature: -20 to 200°C
stainless steel on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: NPT
- for screened (armoured) cables
- 4F: Sealing of the inner cable sheath
  Grounding of the sheathing
  Strain relief of the sheathing
  Sealing of the exterior sheathing


Characteristics:
Certificate: LCIE 05 ATEX 6146 X
Type of protection: Ex d/e
Test standard: EN 60079-0,
EN 60079-1,
EN 60079-7,
EN 61241-0,
EN 61241-1
Device group: II C
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22


Applications:
- for explosion endangered areas
- Machine- and apparatus construction
- Measuring and control engineering
- Plant installations

vanjski navoj External thread	br. No.	promjer brtve vanjskog omotača min. max. mm mm Sealing exterior sheath min. max. mm mm	F max. mm F max. mm	promjer brtve unutarnjeg omotača min. max. mm mm Sealing inner sheath min. max. mm mm	ključ veličine (H1) mm Across Flats (H1) mm	ključ veličine (H2) mm Across Flats (H2) mm	ključ veličine (H3) mm Across Flats (H3) mm	ključ veličine (H4) mm Across Flats (H4) mm	E mm E mm	L mm L mm	broj artikla niklano Art. no. nickel-plated	broj artikla mesing Art. no. blank	JP kom. PU pcs.
NPT 3/8“	5	7,0 - 12,0	1,0	4,0 - 8,0	20,0	20,0	20,0	20,0	16,0	67,0	4134059	4134050	1
NPT 3/8“	6	9,0 - 16,0	1,3	6,0 - 12,0	22,0	24,0	24,0	24,0	16,0	71,0	4134069	4134060	1
NPT 1/2“	5	7,0 - 12,0	1,0	4,0 - 8,0	24,0	20,0	20,0	20,0	20,0	71,0	4134109	4134100	1
NPT 1/2“	6	9,0 - 16,0	1,3	6,0 - 12,0	24,0	24,0	24,0	24,0	20,0	75,0	4134119	4134110	1
NPT 1/2“	7	13,0 - 21,0	1,3	8,5 - 15,0	24,0	30,0	30,0	30,0	20,0	76,0	4134129	4134120	1
NPT 3/4“	6	9,0 - 16,0	1,3	6,0 - 12,0	28,0	24,0	24,0	24,0	20,0	75,0	4134209	4134200	1
NPT 3/4“	7	13,0 - 21,0	1,3	8,5 - 15,5	30,0	30,0	30,0	30,0	20,0	76,0	4134219	4134210	1
NPT 3/4“	8	17,0 - 27,5	1,6	12,0 - 19,5	30,0	40,0	40,0	40,0	20,0	93,0	4134229	4134220	1
NPT 1“	8	17,0 - 27,5	1,6	12,0 - 20,5	36,0	40,0	40,0	40,0	25,0	98,0	4134309	4134300	1
NPT 1“	9	22,0 - 34,0	2,0	16,0 - 25,5	40,0	48,0	48,0	48,0	25,0	104,0	4134319	4134310	1
NPT 1 1/4“	9	22,0 - 34,0	2,0	16,0 - 27,5	44,0	48,0	48,0	48,0	25,0	104,0	4134349	4134340	1
NPT 1 1/4“	10	28,0 - 41,0	2,0	21,0 - 33,0	50,0	55,0	55,0	55,0	25,0	109,0	4134359	4134350	1
NPT 1 1/2“	10	28,0 - 41,0	2,0	21,0 - 34,0	55,0	55,0	55,0	55,0	26,0	110,0	4134369	4134360	1
NPT 1 1/2“	11	34,0 - 48,0	2,5	27,0 - 41,0	55,0	64,0	64,0	64,0	26,0	120,0	4134379	4134370	1
NPT 2“	12	39,0 - 54,0	2,5	33,0 - 46,0	65,0	70,0	70,0	70,0	27,0	123,0	4134409	4134400	1
NPT 2“	13	48,0 - 65,0	2,5	40,0 - 53,5	70,0	85,0	85,0	90,0	27,0	139,0	4134419	4134410	1
NPT 2 1/2“	13	48,0 - 65,0	2,5	40,0 - 54,0	80,0	85,0	85,0	90,0	40,0	150,0	4134459	4134450	1
NPT 2 1/2“	14	55,0 - 74,0	2,5	47,0 - 64,5	85,0	95,0	95,0	100,0	40,0	162,0	4134469	4134460	1
NPT 3“	15	65,0 - 83,0	3,2	54,0 - 71,0	100,0	110,0	110,0	125,0	42,0	173,0	4134509	4134500	1
NPT 3“	16	74,0 - 93,0	3,2	63,0 - 79,0	110,0	120,0	120,0	125,0	42,0	171,0	4134519	4134510	1

Kabelska prirubnica za kabelsku uvodnicu ATEX Ex d/e 1F, 3F, 4F

Clamping Bracket for Cable Gland ATEX Ex d/e 1F, 3F, 4F





RoHS

Materijal:
- **1** prirubnica nosača: čelik pocinčani
- **2** spona: čelik pocinčani
- **3** vijak CHC: nehrđajući čelik

Radna temperatura:
-40°C do 200°C

Boje/izvedbe:
- sa vanjskom zaštitom od izvlačenja

Svojstva:

certifikat:	LCIE 05 ATEX 6146 X
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1 EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C-II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2 , 21, 22

Upotreba:
- za područja ugrožena eksplozijom
- izrada strojeva i aparata
- tehnologija mjernih i kontrolnih instrumenata
- instalacije u proizvodnim postrojenjima

Material:
- **1** Flange-holder: galvanised steel
- **2** Holder: galvanised steel
- **3** Screw CHC: Stainless steel

Temperature range:
-40°C to 200°C

Colour(s)/Designs:
- external strain relief

Characteristics:

Certificate:	LCIE 05 ATEX 6146 X
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C-II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas
- Machines and apparatus construction
- Measuring and control engineering
- Plant installations

Br./veličina prirubnice No./flange size	L mm L mm	Ø A mm Ø A mm	B mm B mm	C mm C mm	za kabel for cables	broj artikla Art.-No.	JP kom. PU pcs.
5	40,0	25,0	25,0	28,0	Ø 7 - Ø 12	9203505	1
6	42,0	29,0	28,0	32,0	Ø 9 - Ø 16	9203506	1
7	50,0	38,0	37,0	40,0	Ø 13 - Ø 21	9203507	1
8	54,0	48,0	40,0	50,0	Ø 17 - Ø 27.5	9203508	1
9	72,0	58,0	48,0	62,0	Ø 22 - Ø 34	9203509	1
10	72,0	65,0	56,0	70,0	Ø 28 - Ø 41	9203510	1
11	72,0	74,0	66,0	78,0	Ø 34 - Ø 48	9203511	1
12	72,0	80,0	74,0	84,0	Ø 39 - Ø 54	9203512	1

3.4


Montaža


Napomena za montažu prije ožičenja:
Stavite prirubnicu nosača na glavu kabelske uvodnice i počnite sa korakom 4.


Primjer montaže 1F

1

Otvorite prirubnicu nosača.
Bend open the flange-holder.

2

Umetnite prirubnicu nosača na glavu kabelske uvodnice.
Insert the flange-holder on the pressing screw of the cable gland.


3

Zatvorite prirubnicu nosača.
Close the flange-holder.


4

Stavite sponu na prirubnicu nosača vertikalno na smjer kabla.
Put the holder on the flange-holder vertical to the cable.


Assembly

Note for assembly before wiring:
Put the flange-holder on the pressing screw of the cable gland and begin with step 4.

Example Assembly 1F

5

Okrenite sponu za 90°.
Turn holder through 90°.

6

Ponovite korake 4 i 5 sa drugom sponom.
Repeat steps 4 and 5 with the second holder.

7

Pričvrstite sa dva vijka.
Tighten the two screws.

ATEX pribor


	Seite
Matice	
mesing niklani	142
Redukcije	
plastika PA Ex e	143
plastika PC Ex e	144
mesing niklani Ex e	145 - 146
mesing niklani Ex d/e	147
Proširenja	
plastika PA Ex e	148
plastika PC Ex e	149
mesing niklani Ex e	150 - 151
mesing niklani Ex d/e	152
Čepovi	
plastika PA Ex e	153
plastika PC Ex e	154
mesing niklani Ex e	155 - 156
Prijelazi	
mesing niklani Ex e	157 - 160
mesing niklani Ex d/e	161 - 162
Brtve plosnate	
neopren	163

ATEX Accessories

	page
Lock nuts	
Nickel-plated brass	142
Reducers	
Plastic PA Ex e	143
Plastic PC Ex e	144
Nickel-plated brass Ex e	145 - 146
Nickel-plated brass Ex d/e	147
Enlargers	
Plastic PA Ex e	148
Plastic PC Ex e	149
Nickel-plated brass Ex e	150 - 151
Nickel-plated brass Ex d/e	152
Plugs	
Plastic PA Ex e	153
Plastic PC Ex e	154
Nickel-plated brass Ex e	155 - 156
Adapter	
Nickel-plated brass Ex e	157 - 160
Nickel-plated brass Ex d/e	161 - 162
Flat sealings	
Neoprene	163

Matica
mesing niklani
PG-/metrički navoj

Lock nuts
nickel-plated brass
PG-/metric thread





RoHS

Materijal:
mesing niklani

Boje/izvedbe:
• navoj: PG/metrički

Svojstva:
• PG prema „starom“ DIN 46 320

Upotreba:
• odgovara za PG-/metričke ATEX kabelske uvodnice, kao i za ATEX pribor

Material:
nickel-plated brass

Colour(s)/Designs:
• Thread: PG/metric

Characteristics:
• PG acc. to „old“ DIN 46 320


Applications:
• suitable for PG-/metric ATEX Cable Glands as well as ATEX Accessories


navoj Thread	debljina (S) mm Thickness (S) mm	SW mm SW mm	broj artikla niklano Art. no. nickel-plated	JP kom. PU pcs.
PG (prema „starom“ DIN 46320) / PG (acc. to „old“ DIN 46320)				
PG 7	2,9	15,0	6000070	50
PG 9	2,9	18,0	6000096	50
PG 11	2,9	21,0	6000118	50
PG 13,5	3,1	23,0	6000134	50
PG 16	3,1	26,0	6000169	50
PG 21	3,6	32,0	6000215	20
PG 29	4,1	41,0	6000290	20
PG 36	5,1	51,0	6000363	10
PG 42	5,1	60,0	6000428	5
PG 48	5,6	64,0	6000487	5
metrički / metric				
M 12 x 1,5	3,0	15,0	6004121	50
M 16 x 1,5	2,8	19,0	6004165	50
M 16 x 1,5	3,0	20,0	6004164	50
M 20 x 1,5	3,5	24,0	6004202	50
M 25 x 1,5	3,5	30,0	6004253	25
M 32 x 1,5	4,5	35,0	6004326	20
M 40 x 1,5	4,5	45,0	6004407	10
M 50 x 1,5	5,5	55,0	6004504	10
M 63 x 1,5	6,0	70,0	6004636	5
M 75 x 1,5	8,0 (10,0)	80,0	6004750	1

Redukcija
ATEX Ex e
poliamid
25 % ojačana staklenim vlaknima, šesterokutna
metrički navoj

Reducers
ATEX Ex e
Polyamide
25 % glassfiber reinforced
hexagon
metric thread

RoHS | Ex | IP 68 | IP 66





Materijal:
- 1: proširenje: poliamid 6
  25 % ojačan staklenim vlaknima
- 2: brtva plosnata: neopren

Radna temperatura:
-35°C do 90°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički
- unutarnji navoj: metrički
- šesterokutna

Svojstva:

certifikat:	LCIE 03 ATEX 0033 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Enlarger: Polyamide 6
  25 % glassfiber reinforced
- 2: Flat Sealing: Neoprene

Temperature range:
-35°C to 90°C

Colour(s)/Designs:
- black
- External thread: Metric
- Internal thread: Metric
- hexagon

Characteristics:


Certificate:	LCIE 03 ATEX 0033 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø M 1)	unutarnji navoj (Ø M 2)	ključ veličine (H1) mm	duljina navoja (E) mm	ukupna duljina (L) mm	broj artikla crna RAL 9005	JP kom.
External thread (Ø M 1)	Internal thread (Ø M 2)	Across Flats (H1) mm	Thread length (E) mm	Complete length (L) mm	Art.-No. black RAL 9005	PU pcs.
M 16 x 1,5	M 12 x 1,5	20,0	8,0	11,0	7218262	50
M 20 x 1,5	M 16 x 1,5	24,0	9,0	12,0	7218263	50
M 25 x 1,5	M 20 x 1,5	30,0	10,0	13,5	7218264	50
M 32 x 1,5	M 25 x 1,5	36,0	11,0	15,0	7218265	25
M 40 x 1,5	M 32 x 1,5	44,0	12,0	16,0	7218266	10
M 50 x 1,5	M 40 x 1,5	55,0	13,0	18,0	7218267	10
M 63 x 1,5	M 50 x 1,5	70,0	15,0	21,0	7218268	10

Redukcija
ATEX Ex e
polikarbonat
šesterokutna
PG-navoj

Reducers
ATEX Ex e
Polycarbonate
hexagon
PG-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: redukcija: polikarbonat
- 2: brtva plosnata: neopren

Radna temperatura:
-35°C do 95°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: PG
- unutarnji navoj: PG
- šesterokutna

Svojstva:

certifikat:	LCIE 03 ATEX 0033 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Reducer: Polycarbonate
- 2: Flat Sealing: Neoprene

Temperature range:
-35°C to 95°C

Colour(s)/Designs:
- light grey
- External thread: PG
- Internal thread: PG
- hexagon

Characteristics:


Certificate:	LCIE 03 ATEX 0033 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø PG 1) External thread (Ø PG 1)	unutarnji navoj (Ø PG 2) Internal thread (Ø PG 2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art.-No. light grey RAL 7035	JP kom. PU pcs.
PG 13	PG 11	24,0	9,0	22,0	7008801	50
PG 16	PG 13	27,0	9,0	21,0	7008802	50
PG 16	PG 11	27,0	9,0	14,0	7008803	50
PG 21	PG 16	32,0	11,3	16,3	7008804	20
PG 21	PG 13	32,0	11,0	16,0	7008805	20
PG 21	PG 11	32,0	11,0	16,0	7008806	20
PG 29	PG 21	41,0	12,0	18,0	7008807	20
PG 29	PG 16	41,0	12,0	18,2	7008808	20
PG 29	PG 13	41,0	12,0	18,3	7008809	20
PG 36	PG 29	50,0	14,0	23,0	7008810	10
PG 36	PG 21	55,0	14,0	21,0	7008811	10
PG 36	PG 16	50,0	14,0	19,3	7008812	10
PG 42	PG 29	55,0	16,0	23,0	7008813	5
PG 42	PG 21	55,0	16,0	22,0	7008814	5
PG 48	PG 29	60,0	16,0	22,0	7008815	5

Redukcija
ATEX Ex e
mesing niklani
metrički navoj

Reducers
ATEX Ex e
nickel-plated brass
metric thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: redukcija: mesing niklani
- 2: brtva plosnata: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: metrički
- šesterokutna

Svojstva:

certifikat:	LCIE 02 ATEX 0038 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1 Reducer: nickel-plated brass
- 2: Flat Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- Internal thread: Metric
- hexagon

Characteristics:


Certificate:	LCIE 02 ATEX 0038 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø M 1) External thread (Ø M 1)	unutarnji navoj (Ø M 2) Internal thread (Ø M 2)	ključ veličine (H3) mm Across Flats (H3) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	M 12 x 1,5	20,0	7,0	10,0	6105081	50
M 20 x 1,5	M 16 x 1,5	24,0	7,0	10,0	6105082	50
M 25 x 1,5	M 20 x 1,5	30,0	8,0	11,5	6105083	20
M 32 x 1,5	M 25 x 1,5	36,0	8,5	12,5	6105084	20
M 40 x 1,5	M 32 x 1,5	42,0	8,5	12,5	6105085	10
M 50 x 1,5	M 40 x 1,5	55,0	9,5	14,5	6105086	5
M 63 x 1,5	M 50 x 1,5	70,0	10,5	17,5	6105087	1
M 75 x 1,5	M 63 x 1,5	80,0	11,5	19,5	6105088	1

Redukcija
ATEX Ex e
mesing niklani
PG-navoj

Reducers
ATEX Ex e
nickel-plated brass
PG-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: redukcija: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: PG
- šesterokutna

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Reducer: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- Internal thread: PG
- hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø PG 1) External thread (Ø PG 1)	unutarnji navoj (Ø PG 2) Internal thread (Ø PG 2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 9	PG 7	18,0	16,0	23,0	6105060	1
PG 11	PG 7	22,0	16,0	23,0	6105061	1
PG 11	PG 9	22,0	16,0	23,0	6105062	1
PG 13	PG 9	24,0	16,0	23,0	6105063	1
PG 13	PG 11	24,0	16,0	38,0	6105064	1
PG 16	PG 11	26,0	16,0	23,0	6105065	1
PG 16	PG 13	26,0	16,0	38,0	6105066	1
PG 21	PG 13	30,0	16,0	23,0	6105067	1
PG 21	PG 16	30,0	16,0	23,0	6105068	1
PG 29	PG 16	40,0	16,0	23,0	6105069	1
PG 29	PG 21	40,0	16,0	23,0	6105070	1
PG 36	PG 21	50,0	16,0	26,0	6105071	1
PG 36	PG 29	50,0	16,0	26,0	6105072	1
PG 42	PG 29	60,0	16,0	28,0	6105073	1
PG 42	PG 36	60,0	16,0	28,0	6105074	1
PG 48	PG 36 DIN	64,0	16,0	28,0	6105075	1
PG 48	PG 42 DIN	64,0	16,0	40,0	6105076	1
PG 48	PG 36 NFC	64,0	16,0	28,0	6105077	1
PG 48	PG 42 NFC	64,0	16,0	40,0	6105078	1

Redukcija
ATEX Ex d/e
mesing niklani
metrički/NPT-navoj

Reducers
ATEX Ex d/e
nickel-plated brass
metric/NPT-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: redukcija: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički/NPT
- unutarnji navoj: metrički/NPT
- šesterokutna

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Reducer: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric/NPT
- Internal thread: Metric/NPT
- hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø M1/NPT1) External thread (Ø M1/NPT1)	unutarnji navoj (Ø M2/NPT2) Internal thread (Ø M2/NPT2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
metrički / metric						
M 16 x 1,5	M 12 x 1,5	18,0	16,0	22,0	6105010	1
M 20 x 1,5	M 12 x 1,5	24,0	16,0	23,0	6105011	1
M 20 x 1,5	M 16 x 1,5	24,0	16,0	23,0	6105012	1
M 25 x 1,5	M 16 x 1,5	28,0	16,0	23,0	6105013	1
M 25 x 1,5	M 20 x 1,5	28,0	16,0	23,0	6105014	1
M 32 x 1,5	M 20 x 1,5	36,0	16,0	24,0	6105015	1
M 32 x 1,5	M 25 x 1,5	36,0	16,0	24,0	6105016	1
M 40 x 1,5	M 25 x 1,5	44,0	16,0	24,0	6105017	1
M 40 x 1,5	M 32 x 1,5	44,0	16,0	24,0	6105018	1
M 50 x 1,5	M 32 x1,5	55,0	16,0	26,0	6105019	1
M 50 x 1,5	M 40 x1,5	55,0	16,0	26,0	6105020	1
M 63 x 1,5	M 40 x 1,5	70,0	16,0	28,0	6105021	1
M 63 x 1,5	M 50 x 1,5	70,0	16,0	28,0	6105022	1
M 75 x 1,5	M 50 x 1,5	80,0	16,0	28,0	6105023	1
M 75 x 1,5	M 63 x 1,5	80,0	16,0	28,0	6105024	1
M 90 x 1,5	M 63 x 1,5	95,0	20,0	35,0	6105025	1
M 90 x 1,5	M 75 x 1,5	95,0	20,0	35,0	6105026	1
M 100 x 1,5	M 75 x 1,5	110,0	22,0	38,0	6105027	1
M 100 x 1,5	M 90 x 1,5	110,0	22,0	38,0	6105028	1
NPT / NPT						
NPT 3/4"	NPT 1/2"	28,0	20,0	26,0	6105040	1
NPT 1"	NPT 1/2"	36,0	25,0	33,0	6105041	1
NPT 1"	NPT 3/4"	36,0	25,0	33,0	6105042	1
NPT 1 1/4"	NPT 3/4"	44,0	25,0	35,0	6105043	1
NPT 1 1/4"	NPT 1"	44,0	25,0	35,0	6105044	1
NPT 1 1/2"	NPT 1"	50,0	26,0	36,0	6105045	1
NPT 1 1/2"	NPT 1 1/4"	50,0	26,0	36,0	6105046	1
NPT 2"	NPT 1 1/4"	64,0	27,0	39,0	6105047	1
NPT 2"	NPT 1 1/2"	64,0	27,0	39,0	6105048	1
NPT 2"	NPT 1"	64,0	27,0	39,0	6105049	1
NPT 3"	NPT 2"	95,0	42,0	57,0	6105050	1
NPT 3"	NPT 2 1/2"	95,0	42,0	57,0	6105051	1

Proširenje
ATEX Ex e
poliamid
25 % ojačan staklenim vlaknima, šesterokutno
metrički navoj

Enlargers
ATEX Ex e
Polyamide
25 % glassfiber reinforced
hexagon
metric thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: proširenje: poliamid 6
  25 % ojačan staklenim vlaknima
- 2: brtva plosnata: neopren

Radna temperatura:
-35°C do 90°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički
- unutarnji navoj: metrički
- šesterokutno

Svojstva:
certifikat: LCIE 03 ATEX 0033 U
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Enlarger: Polyamide 6
  25 % glassfiber reinforced
- 2: Flat Sealing: Neoprene

Temperature range:
-35°C to 90°C

Colour(s)/Designs:
- black
- External thread: Metric
- Internal thread: Metric
- hexagon


Characteristics:
Certificate: LCIE 03 ATEX 0033 U
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø M 1) External thread (Ø M 1)	unutarnji navoj (Ø M 2) Internal thread (Ø M 2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna RAL 9005 Art.-No. black RAL 9005	JP kom. PU pcs.
M 12 x 1,5	M 16 x 1,5	20,0	8,0	19,0	7218222	50
M 16 x 1,5	M 20 x 1,5	24,0	8,0	20,0	7218223	50
M 20 x 1,5	M 25 x 1,5	30,0	9,0	22,0	7218224	50
M 25 x 1,5	M 32 x 1,5	36,0	10,0	24,0	7218225	25
M 32 x 1,5	M 40 x 1,5	44,0	11,0	26,0	7218226	10
M 40 x 1,5	M 50 x 1,5	55,0	12,0	28,0	7218227	10
M 50 x 1,5	M 63 x 1,5	70,0	13,0	32,0	7218228	10

Proširenje
ATEX Ex e
polikarbonat
šesterokutno
PG-navoj

Enlargers
ATEX Ex e
Polycarbonate
hexagon
PG-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: proširenje: polikarbonat
- 2: brtva plosnata: neopren

Radna temperatura:
-35°C do 95°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: PG
- unutarnji navoj: PG

Svojstva:

certifikat:	LCIE 03 ATEX 0033 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Enlarger: Polycarbonate
- 2: Flat Sealing: Neoprene

Temperature range:
-35°C to 95°C

Colour(s)/Designs:
- light grey
- External thread: PG
- Internal thread: PG

Characteristics:


Certificate:	LCIE 03 ATEX 0033 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø PG 1) External thread (Ø PG 1)	unutarnji navoj (Ø PG 2) Internal thread (Ø PG 2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla svjetlosiva RAL 7035 Art.-No. light grey RAL 7035	JP kom. PU pcs.
PG 11	PG 13	24,0	9,0	23,5	7004401	50
PG 13	PG 16	27,0	9,0	23,0	7004402	50
PG 16	PG 21	32,0	10,0	25,5	7004403	50
PG 21	PG 29	41,0	10,0	28,5	7004404	20

Proširenje
ATEX Ex e
mesing niklani
PG-navoj

Enlargers
ATEX Ex e
nickel-plated brass
PG-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: proširenje: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: PG
- šesterokutno

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Enlarger: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- Internal thread: PG
- hexagon

Characteristics:

Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø PG 1) External thread (Ø PG 1)	unutarnji navoj (Ø PG 2) Internal thread (Ø PG 2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	Ø P mm Ø P mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 7	PG 9	18,0	15,0	36,0	7,0	6200520	1
PG 9	PG 11	22,0	15,0	36,0	10,0	6200521	1
PG 11	PG 13	24,0	15,0	37,0	13,5	6200522	1
PG 13	PG 16	27,0	15,0	37,0	15,0	6200523	1
PG 16	PG 21	34,0	15,0	38,0	17,0	6200524	1
PG 21	PG 29	44,0	15,0	38,0	22,0	6200525	1
PG 29	PG 36	55,0	15,0	39,0	30,0	6200526	1
PG 36	PG 42	64,0	15,0	39,0	40,0	6200527	1
PG 42	PG 48 DIN	70,0	15,0	40,0	47,0	6200528	1
PG 42	PG 48 NFC	70,0	15,0	40,0	47,0	6200529	1

Proširenje
ATEX Ex e
mesing niklani
metrički navoj

Enlargers
ATEX Ex e
nickel-plated brass
metric thread

RoHS | Ex | IP 68 | IP 66





šesterokutno / hexagon

Materijal:
- 1: proširenje: mesing niklani
- 2: brtva plosnata: neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: metrički
- šesterokutno

Svojstva:

certifikat:	LCIE 02 ATEX 0038 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Enlarger: nickel-plated brass
- 2: Flat Sealing: Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- Internal thread: Metric
- hexagon

Characteristics:


Certificate:	LCIE 02 ATEX 0038 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø M 1) / External thread (Ø M 1)	unutarnji navoj (Ø M 2) / Internal thread (Ø M 2)	ključ veličine (H3) mm / Across Flats (H3) mm	duljina navoja (E) mm / Thread length (E) mm	ukupna duljina (L) mm / Complete length (L) mm	broj artikla sa ravnom brtvom niklano / Art.-No. with flat sealing nickel-plated	JP kom. / PU pcs.
M 12 x 1,5	M 16 x 1,5	18,0	7,0	18,0	6200541	50
M 16 x 1,5	M 20 x 1,5	22,0	7,0	18,0	6200542	50
M 20 x 1,5	M 25 x 1,5	28,0	8,0	19,0	6200543	50
M 25 x 1,5	M 32 x 1,5	36,0	8,5	20,5	6200544	20
M 32 x 1,5	M 40 x 1,5	42,0	8,5	21,0	6200545	20
M 40 x 1,5	M 50 x 1,5	52,0	9,5	22,0	6200546	10
M 50 x 1,5	M 63 x 1,5	65,0	10,5	24,0	6200547	5
M 63 x 1,5	M 75 x 1,5	80,0	11,5	26,0	6200548	1

Proširenje
ATEX Ex d/e
mesing niklani
metrički/NPT-navoj

Enlargers
ATEX Ex d/e
nickel-plated brass
metric/NPT-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: proširenje: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički/NPT
- unutarnji navoj: metrički/NPT
- šesterokutno

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Enlarger: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric/NPT
- Internal thread: Metric/NPT
- hexagon

Characteristics:

Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø M1/NPT1) mm External thread (Ø M1/NPT1)	unutarnji navoj (Ø M2/NPT2) mm Internal thread (Ø M2/NPT2)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	Ø P mm Ø P mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
metrički / metric							
M 12 x 1,5	M 16 x 1,5	19,0	15,0	37,0	7,0	6200501	1
M 16 x 1,5	M 20 x 1,5	23,0	15,0	37,0	11,0	6200502	1
M 20 x 1,5	M 25 x 1,5	28,0	15,0	37,0	15,0	6200503	1
M 25 x 1,5	M 32 x 1,5	36,0	15,0	38,0	20,0	6200504	1
M 32 x 1,5	M 40 x 1,5	44,0	15,0	38,0	26,0	6200505	1
M 40 x1,5	M 50 x 1,5	55,0	15,0	39,0	34,0	6200506	1
M 50 x 1,5	M 63 x 1,5	70,0	16,0	41,0	42,0	6200507	1
M 63 x 1,5	M 75 x 1,5	80,0	17,0	45,0	55,0	6200508	1
M 75 x 1,5	M 90 x 1,5	95,0	18,0	52,0	67,0	6200509	1
M 90 x 1,5	M 100 x 1,5	110,0	22,0	56,0	80,0	6200510	1
NPT / NPT							
NPT 1/2"	NPT 3/4"	30,0	20,0	47,0	15,0	6200512	1
NPT 3/4"	NPT 1"	38,0	20,0	54,0	20,0	6200513	1
NPT 1"	NPT 1 1/4"	50,0	25,0	59,0	26,0	6200514	1
NPT 1 1/4"	NPT 1 1/2"	52,0	25,0	59,0	34,0	6200515	1
NPT 1 1/2"	NPT 2"	64,0	26,0	63,0	40,0	6200516	1
NPT 2"	NPT 2 1/2"	80,0	27,0	78,0	50,0	6200517	1
NPT 2 1/2"	NPT 3"	100,0	40,0	96,0	60,0	6200518	1

Čep
ATEX Ex e
poliamid
25 % ojačan staklenim vlaknima, šesterokutan
metrički navoj

RoHS | Ex | IP 68 | IP 66

Plugs
ATEX Ex e
Polyamide
25 % glassfiber reinforced
hexagon
metric thread





Materijal:
- 1: čep: poliamid 6 sa 25 % ojačan staklenim vlaknima
- 2: brtva plosnata: neopren

Radna temperatura:
-35°C do 90°C

Boje/izvedbe:
- crna
- vanjski navoj: metrički
- šesterokutan sa utorom

Svojstva:
certifikat: LCIE 03 ATEX 0033 U
tip zaštite: Ex e
testni standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja: II
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Plug: Polyamide 6 with glassfiber reinforced
- 2: Flat sealing: Neoprene

Temperature range:
-35°C to 90°C

Colour(s)/Designs:
- black
- External thread: metric
- hexagon with slot

Characteristics:
Certificate: LCIE 03 ATEX 0033 U
Type of protection: Ex e
Test standard: EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group: II
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø M) External thread (Ø M)	ključ veličine(H1) mm Across Flats (H1) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla crna RAL 9005 Art.-No. black RAL 9005	JP kom. PU pcs.
M 12 x 1,5	16,0	8,0	11,0	7218112	50
M 16 x 1,5	20,0	8,0	12,0	7218116	50
M 20 x 1,5	26,0	9,0	13,0	7218120	50
M 25 x 1,5	32,0	10,0	15,0	7218125	20
M 32 x 1,5	40,0	11,0	16,5	7218132	20
M 40 x 1,5	48,0	12,0	18,0	7218140	20
M 50 x 1,5	55,0	13,0	21,0	7218150	10
M 63 x 1,5	70,0	15,0	24,5	7218163	5

Čep
ATEX Ex e
polikarbonat
šesterokutni
PG-navoj

Plugs
ATEX Ex e
Polycarbonate
hexagon
PG-thread

RoHS | Ex | IP 68 | IP 66





Materijal:
- 1: čep: polikarbonat
- 2: plosnata brtva: neopren

Radna temperatura:
-35°C do 95°C

Boje/izvedbe:
- svjetlosiva
- vanjski navoj: PG
- šesterokutan, s prorezom

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 und 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Plug: Polycarbonate
- 2: Flat sealing: Neoprene

Temperature range:
-35°C to 95°C

Colour(s)/Designs:
- light grey
- External thread: PG
- hexagon with slot

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø PG)	ključ veličine (H1) mm	duljina navoja (E) mm	ukupna duljina (L) mm	broj artikla svjetlosiva RAL 7035	JP kom.
External thread (Ø PG)	Across Flats (H1) mm	Thread length (E) mm	Complete length (L) mm	Art.-No. light grey RAL 7035	PU pcs.
PG 9	19,0	10,0	13,4	7007080	100
PG 11	22,0	10,0	13,8	7007081	100
PG 13	24,0	10,0	13,5	7007082	100
PG 16	27,0	10,0	13,5	7007083	100
PG 21	32,0	12,0	16,5	7007084	50
PG 29	41,0	12,0	18,0	7007085	50
PG 36	55,0	14,0	19,5	7007086	25
PG 42	60,0	16,0	23,5	7007087	25
PG 48	65,0	16,0	25,5	7007088	25

Čep
ATEX Ex e
mesing niklani
šesterokutan
metrički/PG-navoj

Plugs
ATEX Ex e
nickel-plated brass
hexagon
metric/PG-thread





RoHS | Ex | IP 68 | PG | INMETRO

Materijal:
- 1: mesing niklani
- 2: brtva plosnata: neopren

mesing na upit

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
- vanjski navoj: metrički/PG
- šesterokutan
- čepovi bez proreza

Svojstva:

certifikat:	LCIE 02 ATEX 0038 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 60079-31
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: nickel-plated brass
- 2: O-ring: Neoprene

brass blank on request

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
- External thread: metric/ PG
- hexagon
- Plugs without slit

Characteristics:


Certificate:	LCIE 02 ATEX 0038 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 60079-31
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj External thread	ključ veličine(H1) mm Across Flats (H1) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano bez proreza Art.-No. nickel-plated without slit	JP kom. PU pcs.
metrički / metric					
M 12 x 1,5	14,0	10,0	13,0	6702610	50
M 16 x 1,5	17,0	10,0	13,0	6702611	50
M 20 x 1,5	23,0	10,0	13,0	6702612	50
M 25 x 1,5	29,0	10,0	13,5	6702613	20
M 32 x 1,5	39,0	10,0	14,0	6702614	20
M 40 x 1,5	45,0	15,0	19,0	6702615	20
M 50 x 1,5	58,0	15,0	20,0	6702616	10
M 63 x 1,5	70,0	19,0	26,0	6702617	5
M 75 x 1,5	80,0	24,0	32,0	6702618	5
PG / PG					
PG 7	14,0	10,0	13,0	6702651	50
PG 9	17,0	10,0	13,0	6702652	50
PG 11	19,0	10,0	13,0	6702653	50
PG 13	21,0	10,0	13,0	6702654	50
PG 16	23,0	10,0	13,0	6702655	25
PG 21	29,0	12,0	16,0	6702656	20
PG 29	39,0	12,0	16,0	6702657	15
PG 36	50,0	14,0	18,5	6702661	10
PG 42	58,0	16,0	21,0	6702662	10
PG 48	64,0	16,0	22,0	6702663	10
PG 48 DIN	64,0	16,0	22,0	6702664	10

Čep
ATEX Ex e
mesing niklani
šesterokutan
NPT-navoj

Plugs
ATEX Ex e
nickel-plated brass
hexagon
NPT-thread





RoHS | IP 68 | INMETRO

Materijal:
• 1: mesing niklani
mesing na upit

Radna temperatura:
-20°C do 80°C

Boje/izvedbe:
• vanjski navoj: NPT
• šesterokutan

Svojstva:
certifikat: LCIE 02 ATEX 0038 U
tip zaštite: Ex e
testni standard: EN 60079-0,
EN 60079-7,
EN 60079-31
grupa uređaja: II
kategorija: 2 i 3
atmosfera: G / D
zona: 1, 2, 21, 22

Upotreba:
• za područja ugrožena eksplozijom

Material:
• 1: nickel-plated brass
brass blank on request

Temperature range:
-20°C to 80°C

Colour(s)/Designs:
• External thread: NPT
• hexagon


Characteristics:
Certificate: LCIE 02 ATEX 0038 U
Type of protection: Ex e
Test standard: EN 60079-0,
EN 60079-7,
EN 60079-31
Device group: II
Category: 2 and 3
Atmosphere: G / D
Zone: 1, 2, 21, 22

Applications:
• for explosion endangered areas

vanjski navoj External thread	ključ veličine(H1) mm Across Flats (H1) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
NPT 1/4"	15,0	15,0	18,0	6702940	50
NPT 3/8"	19,0	15,0	18,0	6702941	50
NPT 1/2"	23,0	20,0	23,0	6702942	50
NPT 3/4"	29,0	20,0	24,0	6702943	20
NPT 1"	36,0	25,0	29,0	6702944	20
NPT 1 1/4"	45,0	25,0	29,0	6702945	20
NPT 1 1/2"	50,0	26,0	31,0	6702946	10
NPT 2"	64,0	27,0	33,0	6702947	5
NPT 2 1/2"	80,0	40,0	48,0	6702948	1
NPT 3"	100,0	40,0	48,0	6702949	1
NPT 4"	125,0	45,0	55,0	6702950	1

Prijelaz
ATEX Ex e
mesing niklani
metrički/PG-navoj

Adapter
ATEX Ex e
nickel-plated brass
metric/PG-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: prijelaz: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: PG
- šesterokutan

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Adapter: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- Internal thread: PG
- hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø M) External thread (Ø M)	unutarnji navoj (Ø PG) Internal thread (Ø PG)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
M 12 x 1,5	PG 7	18,0	16,0	39,0	6402610	1
M 12 x 1,5	PG 9	20,0	16,0	39,0	6402611	1
M 16 x 1,5	PG 11	22,0	16,0	39,0	6402612	1
M 16 x 1,5	PG 13	24,0	16,0	39,0	6402613	1
M 20 x 1,5	PG 11	22,0	16,0	39,0	6402614	1
M 20 x 1,5	PG 13	24,0	16,0	39,0	6402615	1
M 20 x 1,5	PG 16	26,0	16,0	39,0	6402616	1
M 25 x 1,5	PG 16	27,0	16,0	40,0	6402617	1
M 25 x 1,5	PG 21	32,0	16,0	40,0	6402618	1
M 25 x 1,5	PG 29	40,0	16,0	41,0	6402619	1
M 32 x 1,5	PG 29	40,0	16,0	41,0	6402620	1
M 32 x 1,5	PG 36	52,0	16,0	41,0	6402621	1
M 40 x 1,5	PG 29	44,0	16,0	41,0	6402622	1
M 40 x 1,5	PG 36	52,0	16,0	41,0	6402623	1
M 50 x 1,5	PG 36	55,0	16,0	42,0	6402624	1
M 50 x 1,5	PG 42	70,0	16,0	28,0	6402625	1
M 63 x 1,5	PG 48	70,0	16,0	42,0	6402626	1
M 63 x 1,5	PG 48	70,0	16,0	42,0	6402627	1

Prijelaz
ATEX Ex e
mesing niklani
PG-/metrički navoj

Adapter
ATEX Ex e
nickel-plated brass
PG-/metric thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: prijelaz: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: metrički
- šesterokutan

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Adapter: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- Internal thread: Metric
- hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
- for explosion endangered areas

vanjski navoj (Ø PG) External thread (Ø PG)	unutarnji navoj (Ø M) Internal thread (Ø M)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 7	M 16 x 1,5	19,0	16,0	39,0	6402710	1
PG 9	M 20 x 1,5	23,0	16,0	39,0	6402711	1
PG 11	M 12 x 1,5	21,0	16,0	22,0	6402712	1
PG 11	M 16 x 1,5	21,0	16,0	29,0	6402713	1
PG 11	M 20 x 1,5	23,0	16,0	39,0	6402714	1
PG 13	M 12 x 1,5	23,0	16,0	22,0	6402715	1
PG 13	M 16 x 1,5	23,0	16,0	22,0	6402716	1
PG 13	M 20 x 1,5	23,0	16,0	39,0	6402717	1
PG 13	M 25 x 1,5	28,0	16,0	39,0	6402718	1
PG 16	M 20 x 1,5	26,0	16,0	39,0	6402719	1
PG 21	M 16 x 1,5	32,0	16,0	23,0	6402720	1
PG 21	M 20 x 1,5	32,0	16,0	23,0	6402721	1
PG 21	M 25 x 1,5	32,0	16,0	23,0	6402722	1
PG 29	M 20 x 1,5	41,0	16,0	24,0	6402723	1
PG 29	M 25 x 1,5	41,0	16,0	24,0	6402724	1
PG 29	M 32 x 1,5	41,0	16,0	24,0	6402725	1
PG 29	M 40 x 1,5	44,0	16,0	40,0	6402726	1
PG 36	M 25 x 1,5	52,0	16,0	26,0	6402727	1
PG 36	M 32 x 1,5	52,0	16,0	26,0	6402728	1
PG 36	M 40 x 1,5	52,0	16,0	26,0	6402729	1
PG 36	M 50 x 1,5	55,0	16,0	40,0	6402730	1
PG 42	M 40 x 1,5	58,0	16,0	26,0	6402731	1
PG 42	M 63 x 1,5	70,0	16,0	41,0	6402732	1
PG 48	M 63 x 1,5	70,0	16,0	41,0	6402733	1
PG 48	M 75 x 1,5	80,0	16,0	44,0	6402734	1

Prijelaz
ATEX Ex e
mesing niklani
PG-/NPT-navoj

Adapter
ATEX Ex e
nickel-plated brass
PG-/NPT-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: prijelaz: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: PG
- unutarnji navoj: NPT
- šesterokutan

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Adapter: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: PG
- Internal thread: NPT
- hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø PG) External thread (Ø PG)	unutarnji navoj (Ø NPT) Internal thread (Ø NPT)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
PG 9	NPT 1/2"	24,0	16,0	43,0	6402750	1
PG 11	NPT 1/2"	24,0	16,0	42,0	6402751	1
PG 13	NPT 1/2"	24,0	16,0	41,0	6402752	1
PG 13	NPT 3/4"	30,0	16,0	44,0	6402753	1
PG 16	NPT 1/2"	26,0	16,0	40,0	6402754	1
PG 16	NPT 3/4"	30,0	16,0	43,0	6402755	1
PG 21	NPT 1/2"	32,0	16,0	24,0	6402756	1
PG 21	NPT 3/4"	32,0	16,0	40,0	6402757	1
PG 21	NPT 1"	38,0	16,0	49,0	6402758	1
PG 29	NPT 1/2"	41,0	16,0	24,0	6402759	1
PG 29	NPT 3/4"	41,0	16,0	24,0	6402760	1
PG 29	NPT 1"	41,0	16,0	24,0	6402761	1
PG 29	NPT 1 1/4"	50,0	16,0	50,0	6402762	1
PG 36	NPT 1 1/2"	52,0	16,0	50,0	6402763	1
PG 42	NPT 2"	64,0	16,0	54,0	6402764	1

Prijelaz
ATEX Ex e
mesing niklani
NPT-/PG-navoj

Adapter
ATEX Ex e
nickel-plated brass
NPT-/PG-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
• 1: prijelaz:
mesing niklani
mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
• vanjski navoj: NPT
• unutarnji navoj: PG
• šesterokutan

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex e
testni standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
• za područja ugrožena eksplozijom

Material:
• 1: Adapter: nickel-plated brass
brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
• External thread: NPT
• Internal thread: PG
• hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex e
Test standard:	EN 60079-0, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22

Applications:
• for explosion endangered areas

vanjski navoj (Ø NPT) External thread (Ø NPT)	unutarnji navoj (Ø PG) Internal thread (Ø PG)	ključ veličine (H) mm Across Flats (H) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
NPT 1/2"	PG 9	24,0	20,0	27,0	6402850	1
NPT 1/2"	PG 11	24,0	20,0	43,0	6402851	1
NPT 1/2"	PG 13	24,0	20,0	43,0	6402852	1
NPT 1/2"	PG 16	26,0	20,0	43,0	6402853	1
NPT 1/2"	PG 21	32,0	20,0	43,0	6402854	1
NPT 3/4"	PG 13	30,0	20,0	27,0	6402855	1
NPT 3/4"	PG 16	30,0	20,0	43,0	6402856	1
NPT 3/4"	PG 21	32,0	20,0	43,0	6402857	1
NPT 1"	PG 21	36,0	25,0	48,0	6402858	1
NPT 1"	PG 29	41,0	25,0	50,0	6402859	1
NPT 1 1/2"	PG 36	52,0	26,0	52,0	6402860	1
NPT 2"	PG 42	64,0	27,0	39,0	6402861	1

Prijelaz
ATEX Ex d/e
mesing niklani
metrički/NPT-navoj

Adapter
ATEX Ex d/e
nickel-plated brass
metric/NPT-thread





RoHS | Ex | IP 68 | IP 66

Materijal:
- 1: prijelaz: mesing niklani
- 2: O-brtva: nitril

mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- vanjski navoj: metrički
- unutarnji navoj: NPT
- šesterokutan

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
- za područja ugrožena eksplozijom

Material:
- 1: Adapter: nickel-plated brass
- 2: O-ring: Nitrile

brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- External thread: Metric
- Internal thread: NPT
- hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
- for explosion endangered areas

vanjski navoj (Ø M) External thread (Ø M)	unutarnji navoj (Ø NPT) Internal thread (Ø NPT)	ključ veličine (H1) mm Across Flats (H1) mm	duljina navoja (E1) mm Thread length (E1) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
M 16 x 1,5	NPT 1/2"	24,0	15,0	42,0	6402640	1
M 20 x 1,5	NPT 1/2"	24,0	15,0	40,0	6402641	1
M 20 x 1,5	NPT 3/4"	30,0	15,0	42,0	6402642	1
M 25 x 1,5	NPT 1/2"	28,0	15,0	23,0	6402643	1
M 25 x 1,5	NPT 3/4"	30,0	15,0	41,0	6402644	1
M 25 x 1,5	NPT 1"	38,0	15,0	47,0	6402645	1
M 32 x 1,5	NPT 1/2"	36,0	15,0	23,0	6402646	1
M 32 x 1,5	NPT 3/4"	36,0	15,0	23,0	6402647	1
M 32 x 1,5	NPT 1"	38,0	15,0	47,0	6402648	1
M 40 x 1,5	NPT 3/4"	44,0	15,0	23,0	6402649	1
M 40 x 1,5	NPT 1"	44,0	15,0	23,0	6402650	1
M 40 x 1,5	NPT 1 1/4"	46,0	15,0	47,0	6402651	1
M 40 x 1,5	NPT 1 1/2"	52,0	15,0	48,0	6402652	1
M 50 x 1,5	NPT 1"	55,0	16,0	26,0	6402653	1
M 50 x 1,5	NPT 1 1/2"	55,0	16,0	50,0	6402654	1
M 50 x 1,5	NPT 2"	64,0	16,0	50,0	6402655	1
M 63 x 1,5	NPT 1 1/2"	70,0	17,0	28,0	6402656	1
M 63 x 1,5	NPT 2"	70,0	17,0	51,0	6402657	1
M 75 x 1,5	NPT 2"	80,0	18,0	29,0	6402658	1
M 75 x 1,5	NPT 2 1/2"	80,0	18,0	63,0	6402659	1
M 75 x 1,5	NPT 3"	95,0	18,0	70,0	6402660	1

Prijelaz
ATEX Ex d/e
mesing niklani
NPT-/metrički navoj

Adapter
ATEX Ex d/e
nickel-plated brass
NPT-/metric thread





RoHS | Ex | IP 68 | IP 66

Materijal:
• 1: prijelaz:
mesing niklani
mesing na upit

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
• vanjski navoj: NPT
• unutarnji navoj: metrički
• šesterokutan

Svojstva:

certifikat:	LCIE 07 ATEX 0013 U
tip zaštite:	Ex d/e
testni standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
grupa uređaja:	II C
kategorija:	2 i 3
atmosfera:	G / D
zona:	1, 2, 21, 22

Upotreba:
• za područja ugrožena eksplozijom

Material:
• 1: Adapter: nickel-plated brass
brass blank on request

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
• External thread: NPT
• Internal thread: Metric
• hexagon

Characteristics:


Certificate:	LCIE 07 ATEX 0013 U
Type of protection:	Ex d/e
Test standard:	EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1
Device group:	II C
Category:	2 and 3
Atmosphere:	G / D
Zone:	1, 2, 21, 22


Applications:
• for explosion endangered areas

vanjski navoj (Ø NPT) External thread (Ø NPT)	unutarnji navoj (Ø M) Internal thread (Ø M)	ključ veličine (H) mm Across Flats (H) mm	duljina navoja (E) mm Thread length (E) mm	ukupna duljina (L) mm Complete length (L) mm	broj artikla niklano Art.-No. nickel-plated	JP kom. PU pcs.
NPT 1/2"	M 12 x 1,5	24,0	20,0	27,0	6402810	1
NPT 1/2"	M 16 x 1,5	24,0	20,0	27,0	6402811	1
NPT 1/2"	M 20 x 1,5	24,0	20,0	42,0	6402812	1
NPT 1/2"	M 25 x 1,5	28,0	20,0	42,0	6402813	1
NPT 3/4"	M 16 x 1,5	28,0	20,0	27,0	6402814	1
NPT 3/4"	M 20 x 1,5	28,0	20,0	27,0	6402815	1
NPT 3/4"	M 25 x 1,5	28,0	20,0	42,0	6402816	1
NPT 1"	M 20 x 1,5	36,0	25,0	33,0	6402817	1
NPT 1"	M 25 x 1,5	36,0	25,0	33,0	6402818	1
NPT 1"	M 32 x 1,5	36,0	25,0	48,0	6402819	1
NPT 1 1/4"	M 25 x 1,5	44,0	25,0	33,0	6402820	1
NPT 1 1/4"	M 32 x 1,5	44,0	25,0	33,0	6402821	1
NPT 1 1/2"	M 32 x 1,5	50,0	26,0	35,0	6402822	1
NPT 1 1/2"	M 40 x 1,5	50,0	26,0	35,0	6402823	1
NPT 1 1/2"	M 50 x 1,5	55,0	26,0	51,0	6402824	1
NPT 2"	M 50 x 1,5	64,0	27,0	36,0	6402825	1
NPT 2"	M 63 x 1,5	70,0	27,0	55,0	6402826	1
NPT 2"	M 75 x 1,5	80,0	27,0	55,0	6402827	1
NPT 2 1/2"	M 50 x 1,5	80,0	40,0	53,0	6402828	1
NPT 2 1/2"	M 63 x 1,5	80,0	40,0	53,0	6402829	1
NPT 3"	M 63 x 1,5	90,0	42,0	55,0	6402830	1
NPT 3"	M 75 x 1,5	90,0	42,0	55,0	6402831	1

Brtva plosnata
neopren
PG-/metrički navoj

Flat Sealings
Neoprene
PG-/metric thread





RoHS

Materijal:
neopren

Radna temperatura:
-40°C do 100°C

Boje/izvedbe:
- crna
- navoj: PG/metrički

Upotreba:
- odgovara za PG-/metričke ATEX kabelske uvodnice, kao i za ATEX pribor

Material:
Neoprene

Temperature range:
-40°C to 100°C

Colour(s)/Designs:
- black
- Connecting thread: PG/metric

Applications:
- suitable for PG-/metric ATEX Cable Glands as well as ATEX Accessories

navoj Connecting thread	tip Type	vanjski promjer (A) mm External diameter (A) mm	unutarnji promjer (I) mm Internal diameter (I) mm	debljina (S) mm Thickness (S) mm	broj artikla crna Art. no. black	JP kom. PU pcs.
PG / PG						
PG 7		17,0	11,3	1,2	8113301	100
PG 9		20,0	13,9	1,2	8113302	100
PG 11		23,0	17,1	1,2	8113303	100
PG 13,5		25,0	19,0	1,2	8113304	100
PG 16		27,0	21,0	1,2	8113305	100
PG 21		34,0	26,6	1,5	8113306	50
PG 29		45,0	35,2	1,5	8113307	50
PG 36		56,0	45,2	1,5	8113308	50
PG 42		67,0	52,2	1,5	8113309	50
PG 48		72,0	57,7	1,5	8113310	50
metrički / metric						
M 12 x 1,5	12 F	15,0	10,0	1,2	8113490	100
M 16 x 1,5	16 F	20,0	13,9	1,2	8113302	100
M 20 x 1,5	20 F	24,0	18,0	1,2	8113492	100
M 25 x 1,5	25 F	30,0	23,0	1,2	8113493	100
M 32 x 1,5	32 F	40,0	30,0	1,5	8113494	100
M 40 x 1,5	40 F	48,0	38,0	1,5	8113495	100
M 50 x 1,5	50 F	58,0	48,0	1,5	8113496	100
M 63 x 1,5	63 F	75,0	61,0	1,5	8113497	100
M 75 x 1,5	75 F	90,0	73,0	1,5	8113498	100

Mehatronika / Mechatronic Systems

ADR-GGVS
uvodnice + pribor

ADR-GGVS
Glands + Accessories

5.1

ADR-GGVS
konektori + ABS kabeli

ADR-GGVS
Connectors + ABS Conduits

5.2

ADR-GGVS
pribor

ADR-GGVS
Accessories

5.3

Razvodne kutije +
priključne kutije

Distribution Boxes +
Junction Boxes

5.4

Elektromehaničke
komponente

Electromechanical
Components

5.5

ADR: Europski sporazum o internacionalnom cestovnom transportu opasnih roba
GGVS: Njemačka tehnička pravila o cestovnoj regulaciji opasnih roba
ADR: European agreement concerning the international carriage of dangerous goods by road
GGVS: German technical rules for dangerous goods-regulation road

RoHS: sukladnost na zahtjev
RoHS: conformance on request


ADR-GGVS
Uvodnice + pribor

ADR-GGVS
Glands + Accessories

	stranica		page
Pregled		**Overviews**	
spajanje rebrastih cijevi + uvodnica	4	Combination corrugated Tubes + Glands	4
Sklopovi za montažu		**Assembly Packages**	
T-uvodnice	5 - 6	T-Glands	5 - 6
Redukcije za T-uvodnice	7	Reducers for T-Glands	7
Spojne uvodnice	8 - 10	Connection Glands	8 - 10
Proširenja	11	Enlargements	11
Redukcije	12	Reducers	12
Spojne uvodnice za konektore na cisternama	13	Connection Glands for Tanker Connectors	13






Spajanje rebrastih cijevi i uvodnica

Combination corrugated Tubes and Glands

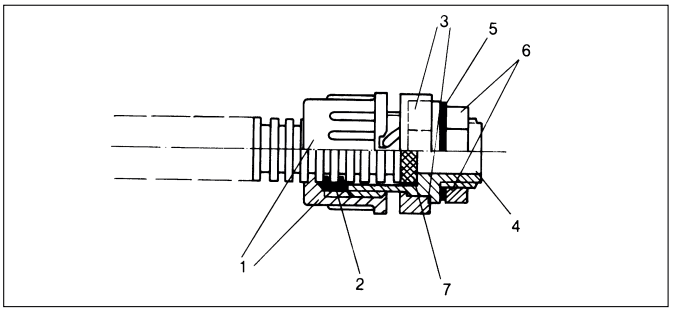

Pribor (vidi poglavlje 5.3):
- pričvrsna matica
- brtveni prsten
- zaporni prsten
- brtva za pojedinačne vodiče
- tijelo uvodnice
- brtva plosnata
- matica

Accessories (see chapter 5.3):
- Cap nut
- Clamp sealing
- Locking ring
- Single wire sealing
- Screw-in-socket
- Flat sealing
- Lock nut


			dodatno/optional					
rebrasta cijev NW standardni profil Corrugated tube NW normal profile	pričvrsna matica broj artikla Cap nut Art. no.	brtveni prsten broj artikla Clamp sealing Art. no.	zaporni prsten broj artikla Locking ring Art. no.	brtva za pojedinačne vodiče broj artikla Single wire sealing Art. no.	tijelo uvodnice broj artikla Screw-in-socket Art. no.		brtva plosnata broj artikla Flat sealing Art. no.	matica broj artikla Lock nut Art. no.
								
	1	2	3	7	4		5	6
8,5 *	9801324	8117080	–	8113647	9801308	–	8113017	7001096
10	9800689	8117101	8118094	8113647	9800751	9801260*	8113017	7001096
13	9800956	8117136	8118132	8113648	9800972	9801278	9805281	7001118
17	9800697	8117179	8118175	–	9800778	9800859	8113041	7001169
22	9800905	8117225	8118221	–	9800921*	9800867	8113068	7001215
23	9801251	8117233	8118221	–	9801243	–	8113068	7001215
29 *	9801138	8117292	–	–	9801189	9801286	8113010	7001290

Napomena:
* nije moguće zabravljivanje

Note:
* No locking possible

Sklopovi za montažu T-uvodnice

Assembly Packages T-Glands





IP 67

Materijal:
Polikarbonat
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- crna/siva
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- pričvrsna matica
- brtveni prsten

Upotreba:
- gospodarska vozila

Material:
Polycarbonate
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- black/grey
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Cap nut
- Clamp sealing


Applications:
- Heavy trucks



stavka Item	opis Description	B dimenzija cijevi NW B Tube size NW	C dimenzija cijevi NW C Tube size NW	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet complete	**T-uvodnica NW 10-10-10 T-gland**	**10**		**crna/siva black/grey**	**7800134**	**1**
1	T - tijelo uvodnice T-fitting	10		crna black	9800719	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	3
3	brtveni prsten Clamp sealing	10		crna black	8117101	3




komplet complete	**T-uvodnica NW 10-17-10 sa nosačem za pričvršćivanje T-gland with fixing-strap**	**10**	**17**	**crna/siva black/grey**	**7800100**	**1**
1	T - tijelo uvodnice T-fitting	10	17	crna black	9800727	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	2
3	pričvrsna matica Cap nut		17	siva grey	9800697	1
4	brtveni prsten Clamp sealing	10		crna black	8117101	2
5	brtveni prsten Clamp sealing		17	crna black	8117179	1



komplet complete	**T-uvodnica NW 17-17-17 sa nosačem za pričvršćivanje T-gland with fixing-strap**	**17**		**crna/siva black/grey**	**7800118**	**1**
1	T - tijelo uvodnice T-fitting	17		crna black	9800760	1
2	pričvrsna matica Cap nut	17		siva grey	9800697	3
3	brtveni prsten Clamp sealing	17		crna black	8117179	3

Sklopovi za montažu T-uvodnice

Assembly Packages T-Glands





5.1

IP 67

Materijal:
Polikarbonat
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- crna/siva
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3) :
- pričvrsna matica
- brtveni prsten

Upotreba:
- gospodarska vozila

Material:
Polycarbonate
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- black/grey
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Cap nut
- Clamp sealing

Applications:
- Heavy trucks




stavka Item	opis Description	B NW B NW	C NW C NW	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet complete	**T-uvodnica NW 22-17-22 sa nosačem za pričvršćivanje** **T-gland with fixing-strap**	**22**	**17**	**crna/siva** **black/grey**	**7800096**	**1**
1	T - tijelo uvodnice T-fitting	22	17	crna black	9800700	1
2	pričvrsna matica Cap nut	22		siva grey	9800905	2
3	pričvrsna matica Cap nut		17	siva grey	9800697	1
4	brtveni prsten Clamp sealing	22		crna black	8117225	2
5	brtveni prsten Clamp sealing		17	crna black	8117179	1



komplet complete	**T-uvodnica NW 22-10-10-22 22 sa nosačem za pričvršćivanje** **T-gland with fixing-strap**		**10**	**crna/siva** **black/grey**	**7800126**	**1**
1	T - tijelo uvodnice T-fitting	22	10	crna black	9800735	1
2	pričvrsna matica Cap nut	22		siva grey	9800905	2
3	pričvrsna matica Cap nut		10	siva grey	9800689	2
4	brtveni prsten Clamp sealing	22		crna black	8117225	2
5	brtveni prsten Clamp sealing		10	crna black	8117101	2

Sklopovi za montažu Redukcije za T-uvodnice NW 17 i NW 22

Assembly Packages Reducers for T-Gland NW 17 and NW 22



IP 67

Materijal:
Elastomer
Poliamid

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- crna

Svojstva:
- sastoji se od brtve i glave uvodnice

- odgovarajuće za T-uvodnice
  10-17-10
  22-17-22
  17-17-17
  22-10-10-22

Pribor:
- brtva
- pričvrsna matica

Upotreba:
- gospodarska vozila

Material:
Elastomere
Polyamide

Temperature range:
-25°C to 80°C


Colour(s)/Designs:
- black

Characteristics:
- consisting of sealing and cap nut

- suitable for T-glands
  10-17-10
  22-17-22
  17-17-17
  22-10-10-22

Accessories:
- Sealing
- Cap nut

Applications:
- Heavy trucks



stavka Item	opis Description	B NW B NW	C NW C NW	redukcija za NW reducing for NW	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
1	brtva Sealing	22		10 13 17	crna black	8115532 8115531 8115530	100
2	pričvrsna matica Cap nut	22		10 13 17	crna black	9801702 9801701 9801700	100
3	brtva Sealing		17	10 13	crna black	8115541 8115540	100
4	pričvrsna matica Cap nut		17	10 13	crna black	9801704 9801703	100

Sklopovi za montažu
Spojne uvodnice

Assembly Packages
Connection Glands



5.1

IP 67

Materijal:
Poliamid
Polikarbonat
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- siva/crna
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- tijelo uvodnice
- pričvrsna matica
- brtveni prsten
- brtva plosnata
- matica

Upotreba:
- gospodarska vozila
- za spajanje rebrastih cijevi, npr. na šasije vozila

Material:
Polyamide
Polycarbonate
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- grey/black
- Assembly packages ready for installation

Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Screw-in-socket
- Cap nut
- Clamp sealing
- Flat sealing
- Lock nut


Applications:
- Heavy trucks
- For connection of corrugated tubes, e. g. on housing



stavka Item	opis Description	B NW B NW	boja kom. Colour pcs.	broj artikla Art. no.	JP PU
komplet **complete**	**spojna uvodnica** **Connection gland**	**10**	**siva** **grey**	**7800002**	**1**
1	tijelo uvodnice/Screw-in-socket	10	siva/ grey	9800751	1
2	pričvrsna matica/Cap nut	10	siva/ grey	9800689	1
3	brtveni prsten/Clamp sealing	10	crna/ black	8117101	1
4	brtva plosnata/Flat sealing	10	crna/ black	8113017	1
5	matica/Lock nut	10	siva/ grey	7001096	1
komplet **complete**	**spojna uvodnica** **Connection gland**	**12/13**	**siva** **grey**	**7800045**	**1**
1	tijelo uvodnice/Screw-in-socket	12/13	siva/ grey	9800972	1
2	pričvrsna matica/Cap nut	12/13	siva/ grey	9800956	1
3	brtveni prsten/Clamp sealing	12/13	crna/ black	8117136	1
4	brtva plosnata/Flat sealing	12/13	crna/ black	9805281	1
5	matica/Lock nut	12/13	siva/ grey	7001118	1
komplet **complete**	**spojna uvodnica** **Connection gland**	**17**	**siva** **grey**	**7800010**	**1**
1	tijelo uvodnice/Screw-in-socket	17	siva/ grey	9800859	1
2	pričvrsna matica/Cap nut	17	siva/ grey	9800697	1
3	brtveni prsten/Clamp sealing	17	crna/ black	8117179	1
4	brtva plosnata/Flat sealing	17	crna/ black	8113041	1
5	matica/Lock nut	17	siva/ grey	7001169	1
komplet **complete**	**spojna uvodnica** **Connection gland**	**22**	**siva** **grey**	**7800029**	**1**
1	tijelo uvodnice/Screw-in-socket	22	siva/ grey	9800867	1
2	pričvrsna matica/Cap nut	22	siva/ grey	9800905	1
3	brtveni prsten/Clamp sealing	22	crna/ black	8117225	1
4	brtva plosnata/Flat sealing	22	crna/ black	8113068	1
5	matica/Lock nut	22	siva/ grey	7001215	1

Sklopovi za montažu Spojne uvodnice

Assembly Packages Connection Glands



IP 67

Materijal:
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- siva/crna
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- tijelo uvodnice
- pričvrsna matica
- brtveni prsten
- brtva plosnata

Upotreba:
- gospodarska vozila
- za spajanje rebrastih cijevi, npr. na šasije vozila

Material:
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- grey/black
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Transition piece
- Cap nut
- Clamp sealing
- Flat sealing


Applications:
- Heavy trucks
- For connection of corrugated tubes, e. g. on housing




stavka Item	opis Description	B NW B NW	C spojni navoj C Thread	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**10**	**1"-20 UNEF-2B**	**siva** **grey**	**7800207**	**1**
1	tijelo uvodnice Transition piece		1"-20 UNEF-2B	siva grey	9801014	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	1
3	brtveni prsten Clamp sealing	10		crna black	8117101	1
4	brtva plosnata Flat sealing	10		crna black	8113084	1



komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**10**	**7/8"-20 UNEF-2B**	**siva** **grey**	**7800240**	**1**
1	tijelo uvodnice Transition piece		7/8"-20 UNEF-2B	siva grey	9801022	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	1
3	brtveni prsten Clamp sealing	10		crna black	8117101	1
4	brtva plosnata Flat sealing	10		crna black	8113092	1




komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**10**	**5/8"-24 UNEF 2B**	**siva** **grey**	**7800258**	**1**
1	tijelo uvodnice Transition piece		5/8"-24 UNEF 2B	siva grey	9801006	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	1
3	brtveni prsten Clamp sealing	10		crna black	8117101	1



komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**10**	**1 3/16"-18 UNEF-2B**	**siva** **grey**	**7800312**	**1**
1	tijelo uvodnice Transition piece		1 3/16"-18 UNEF-2B	siva grey	9801170	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	1
3	brtveni prsten Clamp sealing	10		crna black	8117101	1
4	brtva plosnata Flat sealing	10		crna black	8113041	1

Sklopovi za montažu
Spojne uvodnice

Assembly Packages
Connection Glands



5.1

IP 67

Materijal:
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- siva/crna
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- tijelo uvodnice
- pričvrsna matica
- brtveni prsten
- brtva plosnata

Upotreba:
- gospodarska vozila
- za spajanje rebrastih cijevi, npr. na šasije vozila

Material:
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- grey/black
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Transition piece
- Cap nut
- Clamp sealing
- Flat sealing


Applications:
- Heavy trucks
- For connection of corrugated tubes, e. g. on housing



stavka Item	opis Description	B NW B NW	C spojni navoj C Thread	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**17**	**1 3/16"-18 UNEF-2B**	**siva** **grey**	**7800231**	**1**
1	tijelo uvodnice Transition piece		1 3/16"-18 UNEF-2B	siva grey	9801049	1
2	pričvrsna matica Cap nut	17		siva grey	9800697	1
3	brtveni prsten Clamp sealing	17		crna black	8117179	1
4	brtva plosnata Flat sealing	17		crna black	8113041	1




komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**17**	**1"-20 UNEF-2B**	**siva** **grey**	**7800215**	**1**
1	tijelo uvodnice Transition piece		1"-20 UNEF-2B	siva grey	9801030	1
2	pričvrsna matica Cap nut	17		siva grey	9800697	1
3	brtveni prsten Clamp sealing	17		crna black	8117179	1
4	brtva plosnata Flat sealing	17		crna black	8113084	1




komplet **complete**	**spojna uvodnica s unutarnjim navojem za VG-utikač oblika E i H** **Connection gland with internal thread for VG-plug Form E and H**	**22**	**1 7/16" UNEF-2B**	**siva** **grey**	**7800223**	**1**
1	tijelo uvodnice Transition piece		1 7/16" UNEF-2B	siva grey	9801057	1
2	pričvrsna matica Cap nut	22		siva grey	9800905	1
3	brtveni prsten Clamp sealing	22		crna black	8117225	1
4	brtva plosnata Flat sealing	22		crna black	8113050	1

Sklopovi za montažu Proširenja

Assembly Packages Enlargements


NW 10 → 13


NW 17 → 22

IP 67

Materijal:
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- siva/crna
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- tijelo uvodnice
- pričvrsna matica
- brtveni prsten

Upotreba:
- gospodarska vozila

Material:
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- grey/black
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Transition piece
- Cap nut
- Clamp sealing

Applications:
- Heavy trucks




stavka Item	opis Description	B dimenzija cijevi NW B tube size NW	C odgovara za C fits for	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet **complete**	**proširenje NW 10→13** **Enlargement NW 10→13**	**13**	T-uvodnica br. art. 7800134 (10-10-10) br. art. 7800100 (10-10-17) br. art. 7800126 (22-22-10-10) T-gland Art. no. 7800134 (10-10-10) Art. no. 7800100 (10-10-17) Art. no. 7800126 (22-22-10-10)	**siva** **grey**	**7800061**	**1**
1	tijelo uvodnice PG 11/21,8x1,41 Transition piece			siva grey	9801120	1
2	pričvrsna matica Cap nut	13		siva grey	9800956	1
3	brtveni prsten Clamp sealing	13		crna black	8117136	1



komplet **complete**	**proširenje NW 17→22** **Enlargement NW 17→22**	**22**	T-uvodnica br. art. 7800100 (10-10-17) br. art. 7800118 (17-17-17) T-gland Art. no. 7800100 (10-10-17) Art. no. 7800118 (17-17-17)	**siva** **grey**	**7800282**	**1**
1	tijelo uvodnice 26,2x1,41/M35x1,75 Transition piece			siva grey	9801162	1
2	pričvrsna matica Cap nut	22		siva grey	9800905	1
3	brtveni prsten Clamp sealing	22		crna black	8117225	1

Sklopovi za montažu Redukcije

Assembly Packages Reducers

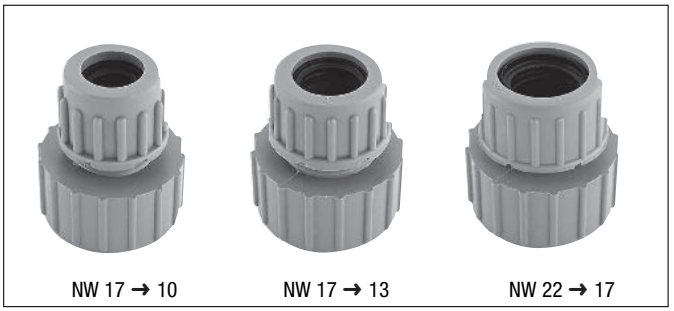

IP 67

Materijal:
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- siva/crna
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- tijelo uvodnice
- pričvrsna matica
- brtveni prsten
- brtva plosnata

Upotreba:
- gospodarska vozila

Material:
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- grey/black
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Transition piece
- Cap nut
- Clamp sealing
- Flat sealing


Applications:
- Heavy trucks



stavka Item	opis Description	B NW B NW	C odgovara za C fits for	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet **complete**	**Redukcija NW 17→10** **Reducer NW 17→10**	**10**	T-uvodnica br. art. 7800100 (10-10-17) br. art. 7800118 (17-17-17) br. art. 7800096 (22-17-22) T-gland Art. no. 7800100 (10-10-17) Art. no. 7800118 (17-17-17) Art. no. 7800096 (22-17-22)	**siva** **grey**	**7800274**	**1**
1	tijelo uvodnice PG 11/21,2x1,41 Transition piece			siva grey	9801090	1
2	pričvrsna matica Cap nut	10		siva grey	9800689	1
3	brtveni prsten Clamp sealing	10		crna black	8117101	1
4	brtva plosnata Flat sealing			crna black	8113327	1



komplet **complete**	**Redukcija NW 17→13** **Reducer NW 17→13**	**13**	T-uvodnica br. art. 7800100 (10-10-17) br. art. 7800118 (17-17-17) br. art. 7800096 (22-17-22) T-gland Art. no. 7800100 (10-10-17) Art. no. 7800118 (17-17-17) Art. no. 7800096 (22-17-22)	**siva** **grey**	**7800053**	**1**
1	tijelo uvodnice 26,2x1,41/M35x1,75 Transition piece			siva grey	9801103	1
2	pričvrsna matica Cap nut	13		siva grey	9800956	1
3	brtveni prsten Clamp sealing	13		crna black	8117136	1
4	brtva plosnata Flat sealing			crna black	8113327	1



komplet **complete**	**Redukcija NW 22→17** **Reducer NW 22→17**	**17**	T-uvodnica br. art. 7800126 (22-22-10-10) br. art. 7800096 (22-17-22) T-gland Art. no. 7800126 (22-22-10-10) Art. no. 7800096 (22-17-22)	**siva** **grey**	**7800266**	**1**
1	tijelo uvodnice 26,2x1,41/M35x1,75 Transition piece			siva grey	9801081	1
2	pričvrsna matica Cap nut	17		siva grey	9800697	1
3	brtveni prsten Clamp sealing	17		crna black	8117179	1
4	brtva plosnata Flat sealing			crna black	8113319	1

Sklopovi za montažu Spojne uvodnice za konektore na cisternama

Assembly Packages Connection Glands for Tanker Connectors



IP 67

Materijal:
Poliamid
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
- siva/crna
- sklopovi spremni za montažu

Napomena:
A = konus mora biti usmjeren prema glavi uvodnice

Pribor (vidi poglavlje 5.3):
- tijelo uvodnice
- pričvrsna matica
- brtveni prsten
- brtva plosnata

Upotreba:
- gospodarska vozila
- za konektore rezervoara goriva

Material:
Polyamide
Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
- grey/black
- Assembly packages ready for installation


Note:
A = Cone must show into cap nut

Accessories (see chapter 5.3):
- Screw-in-socket
- Cap nut
- Clamp sealing
- Flat sealing

Applications:
- Heavy trucks
- for fuel sockets



stavka Item	opis Description	B NW B NW	C odgovara za C fits for	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
komplet **complete**	**spojna uvodnica** **Connection gland**	**17**	9-pol. priključnica broj artikla 7800436 i utikač broj artikla 7800444 (priključnica i utikač na upit) 9-pol. Socket Art. no. 7800436 and plug Art. no. 7800444 (Socket and plug on request)	**siva** **grey**	**7800304**	**1**
1	tijelo uvodnice Screw-in-socket	17		siva grey	9801065	1
2	pričvrsna matica Cap nut	17		siva grey	9800697	1
3	brtveni prsten Clamp sealing	17		crna black	8117179	1
4	brtva plosnata Flat sealing	17		crna black	8113050	1



komplet **complete**	**spojna uvodnica** **Connection gland**	**17**	13-pol. priključnica broj artikla 7800452 i utikač broj artikla 7800460 (priključnica i utikač na upit) 13-pol. Socket Art. no. 7800452 and plug Art. no. 7800460 (Socket and plug on request)	**siva** **grey**	**7800290**	**1**
1	tijelo uvodnice Screw-in-socket			siva grey	9801073	1
2	pričvrsna matica Cap nut	17		siva grey	9800697	1
3	brtveni prsten Clamp sealing	17		crna black	8117179	1
4	brtva plosnata Flat sealing	17		crna black	8113010	1

ADR-GGVS
konektori + ABS kabeli

ADR-GGVS
Connectors + ABS Conduits


	stranica		page
„Odgovara za SEAL" konektore (sa brtvljenim kontaktima)		**“Suitable for SEAL” Connectors**	
4-polni – ravni / kutni	16	4-pole – straight / angle	16
4-polni – utikač bez zaštitne kape	17	4-pole – Plug without protection cap	17
5-polni – ravna	18	5-pole – straight	18
5-polni – kutna	19	5-pole – angle	19
8-polni – utikač	20	8-pole – Plug	20
8-polni – priključnica za prirubnicu	21	8-pole – Socket for flange assembly	21
8-polni – priključnica za rebrastu cijev	22	8-pole – Socket for corrugated tube	22
16-polni – utikač/priključnica	23 - 24	16-pole – Plug/Socket	23 - 24
35-polni – utikač/priključnica	25 - 26	35-pole – Plug/Socket	25 - 26
37-polni – utikač	27	37-pole – Plug	27
Kontakti/brtve/alati za SEAL-konektore	28 - 29	**Contacts/SEALS/Tools for SEAL Connectors**	28 - 29
„Ne odgovara za SEAL" konektore (sa brtvljenim kontaktima)		**„Not suitable for SEAL“ Connectors**	
3-polni	30	3-pole	30
5-polni	31	5-pole	31
8-polni – za prirubnicu	32	8-pole – for flange assembly	32
8-polni – za montažu na rebrastu cijev	33	8-pole – for corrugated tube assembly	33
16-polni – utikač/priključnica	34 - 35	16-pole – Plug/Socket	34 - 35
21-polni – utikač/priključnica	36 - 37	21-pole – Plug/Socket	36 - 37
37-polni – utikač/priključnica	38 - 39	37-pole – Plug/Socket	38 - 39
utični/natični kontakti	40	**Pin-/Jack contacts**	40
Alati	41	**Tools**	41
Specijalni konektori		**Special Connectors**	
3-polni	42	3-pole	42
3-polni – sklopovi za montažu	43	3-pole – Assembly packages	43
2-/3-polni – s navojem M 24 x 1	44	2-/3-pole – with thread M 24 x 1	44
2-/3-/4-polni – s navojem M 27 x 1	45	2-/3-/4-pole – with thread M 27 x 1	45
2-/3-/4-polni – s bajonetom	46	2-/3-/4-pole – with bayonet	46
Brtve za specijalne konektore	47	**Sealings for Special Connectors**	47
ABS/EBS-konektori i kabeli		**ABS/EBS-Connectors & Conduits**	
ABS/EBS/15-pol. konektor + ABS-parking priključnica	48	ABS/EBS/15-pole connectors + ABS-Parking socket	48
Zamjenski kontakti	49	Replacement contacts	49
ABS/EBS/15-pol. spiralni kabel	50	ABS/EBS/15-pole conduits	50

4-polni utikač

SEAL (brtvljeni kontakt)

4-pole Plug

SEAL





IP 67

Materijal:
Polibutilenteraftalat
Poliamid
Silikon

Radna temperatura:
-40°C do 125°C

Gorivost:
UL 94: HB

Boje/izvedbe:
- Boje: vidi tabelu
- bez/sa kompenzacijom tlaka

Svojstva:
- prema ISO 15170 (prijašnji DIN 72585)
- spojni sistem: Ø 2,5 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- obujmice za zaštitu vodiča (5.3) dodatno

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi
- odgovara za rebraste cijevi NW 8,5 i NW 4,5

Material:
Polybuthyleneterephtalate
Polyamide
Silicone

Temperature range:
-40°C to 125°C

Flammability:
UL 94: HB

Colour(s)/Designs:
- Colours: s. table
- without/with pressure compensation


Characteristics:
- Acc. to ISO15170 (former DIN 72585)
- Contact system: Ø 2,5 mm

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Secondary lock (5.3) optional


Applications:
- Heavy trucks
- Agricultural machines
- Construction machines
- Suitable for corrugated tubes NW 8,5 and NW 4,5

5.2

ravni/straight



kutni/angle




oblik Coding Form	Izvedba Design	boja natično kućište Colour Jack housing	boja bajonet matica Colour Bayonet nut	broj artikla Art. no.	JP kom. PU pcs.
za rebrastu cijev NW 8,5 / for corrugated tube NW 8,5					
1	bez kompenzacije tlaka / without pressure compensation	crna / black	crna / black	9800350	100
	sa kompenzacijom tlaka / with pressure compensation	crna/black	siva/grey	9800340	100
2	bez kompenzacije tlaka / without pressure compensation	siva/grey	crna / black	9800351	100
	sa kompenzacijom tlaka / with pressure compensation	siva/grey	siva/grey	9800341	100
3	bez kompenzacije tlaka / without pressure compensation	zelena / green	crna / black	9800352	100
	sa kompenzacijom tlaka / with pressure compensation	zelena / green	siva/grey	9800342	100
4	bez kompenzacije tlaka / without pressure compensation	plava / blue	crna / black	9800353	100
	sa kompenzacijom tlaka / with pressure compensation	plava / blue	siva/grey	9800343	100
za rebrastu cijev NW 4,5 / for corrugated tube NW 4,5					
1	bez kompenzacije tlaka / without pressure compensation	crna / black	crna / black	9800374	100
	sa kompenzacijom tlaka / with pressure compensation	crna / black	siva/grey	9800384	100
2	bez kompenzacije tlaka / without pressure compensation	siva / grey	crna / black	9800375	100
	sa kompenzacijom tlaka / with pressure compensation	siva / grey	siva/ grey	9800385	100
3	bez kompenzacije tlaka/ without pressure compensation	zelena / green	crna / black	9800376	100
	sa kompenzacijom tlaka / with pressure compensation	zelena / green	siva/grey	9800386	100
4	bez kompenzacije tlaka / without pressure compensation	plava / blue	crna / black	9800377	100
	sa kompenzacijom tlaka / with pressure compensation	plava / blue	siva/grey	9800387	100
za rebrastu cijev NW 8,5 / for corrugated tube NW 8,5					
1	bez kompenzacije tlaka / without pressure compensation	crna / black	crna / black	9800330	100
	sa kompenzacijom tlaka / with pressure compensation	crna / black	siva/grey	9800320	100
2	bez kompenzacije tlaka / without pressure compensation	siva / grey	crna / black	9800331	100
	sa kompenzacijom tlaka / with pressure compensation	siva / grey	siva/grey	9800321	100
3	bez kompenzacije tlaka / without pressure compensation	zelena / green	crna / black	9800332	100
	sa kompenzacijom tlaka / with pressure compensation	zelena / green	siva/grey	9800322	100
4	bez kompenzacije tlaka / without pressure compensation	plava / blue	crna / black	9800333	100
	sa kompenzacijom tlaka / with pressure compensation	plava / blue	siva/grey	9800323	100

4-polni utikač

SEAL (brtvljeni kontakt) bez zaštitne kape

4-pole Plug

SEAL without protection cap





IP 67

Materijal:
Polibutilenteraftalat
Poliamid
Silikon

Radna temperatura:
-40°C do 125°C

Gorivost:
UL 94: HB

Boje/izvedbe:
- Boje: vidi tabelu
- bez/sa kompenzacijom tlaka

Svojstva:
- prema ISO 15170 (prijašnji DIN 72585)
- spojni sistem: Ø 2,5 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- obujmice za zaštitu vodiča (5.3) dodatno

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polybuthyleneterephtalate
Polyamide
Silicone

Temperature range:
-40°C to 125°C

Flammability:
UL 94: HB

Colour(s)/Designs:
- Colours: s. table
- no/with pressure compensation


Characteristics:
- Acc. to ISO 15170 (former DIN 72585)
- Contact system: Ø 2,5 mm

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Secondary lock (5.3) optional

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

utikač/Plug



oblik Coding Form	Izvedba Design	boja natično kućište Colour Jack housing	boja bajonet matica Colour Bayonet nut	broj artikla Art. no.	JP kom. PU pcs.
1	bez kompenzacije tlaka / without pressure compensation	crna/black	crna/black	9800310	100
	sa kompenzacijom tlaka / with pressure compensation	crna/black	siva/grey	9800300	100
2	bez kompenzacije tlaka / without pressure compensation	siva/grey	crna/black	9800311	100
	sa kompenzacijom tlaka / with pressure compensation	siva/grey	siva/grey	9800301	100
3	bez kompenzacije tlaka / without pressure compensation	zelena/green	crna/black	9800312	100
	sa kompenzacijom tlaka / with pressure compensation	zelena/green	siva/grey	9800302	100
4	bez kompenzacije tlaka / without pressure compensation	plava/blue	crna/black	9800313	100
	sa kompenzacijom tlaka / with pressure compensation	plava/blue	siva/grey	9800303	100

opis Description	za for	broj artikla Art. no.
prijelaz ravni / Adaptor straight	NW 4,5	7807666
	NW 8,5	7807665
	NW 10	7807263
slijepa brtva za 4-polni utikač / Blind plug for 4-pole plug		7807678

5-polni konektor
SEAL (brtvljeni kontakt)
ravni

5-pole Connector
SEAL
Straight

IP 67



utično kućište
Pin housing



natično kućište
Jack housing

Materijal:
Poliamid 6/66
Perbunan

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna/siva
- sklopovi za montažu od 100 kom na upit

Svojstva:
- spojni sistem: Ø 1,6 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- obujmice za zaštitu vodiča (5.3) dodatno

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6/66
Perbunan

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.







Colour(s)/Designs:
- black/grey
- Assembly packages from 100 pcs on request

Characteristics:
- Contact system: Ø 1,6 mm

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Secondary lock (5.3) optional

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description		za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	rebrasta cijev Corrugated tube	NW 8,5 NW 10				
	ravna zaštitna kapa Straight protection cap	NW 8,5 NW 10	crna black	Poliamid 66 Polyamide 66	7807665 7807263	50 50
	5-pol. utično kućište 5-pole pin housing	za kontakt for contact Ø 1,6 mm	crna black	Poliamid 6 Perbunan Polyamide 6 Perbunan	7806248	50
			siva grey	Poliamid 6 Perbunan Polyamide 6 Perbunan	7806249	50
	5-pol. natično kućište 5-pole jack housing	za kontakt for contact Ø 1,6 mm	crna black	Poliamid 6 Polyamide 6	7805252	50
			siva grey	Poliamid 6 Polyamide 6	7805253	50
	ravna zaštitna kapa Straight protection cap	NW 8,5 NW 10	crna black	Poliamid 66 Polyamide 66	7807665 7807263	50 50
	rebrasta cijev Corrugated tube	NW 8,5 NW 10				

Schlemmer

5-polni konektor
SEAL (brtvljeni kontakt) kutni

5-pole Connector
SEAL Angle

IP 67



utično kućište
Pin housing



natično kućište
Jack housing

Materijal:
Poliamid 6
Perbunan

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna
- sklopovi za montažu od 100 komada na upit

Svojstva:
- spojni sistem: Ø 1,6 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- obujmice za zaštitu vodiča (5.3) dodatno

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Perbunan

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.





Colour(s)/Designs:
- black
- Assembly packages from 100 pcs on request

Characteristics:
- Contact system: Ø 1,6 mm

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Secondary lock (5.3) optional

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

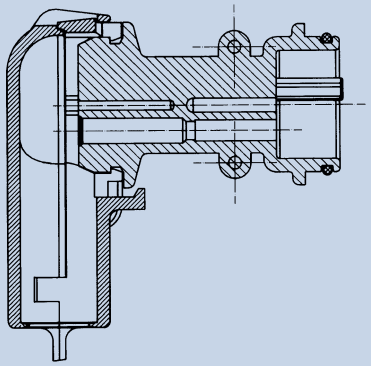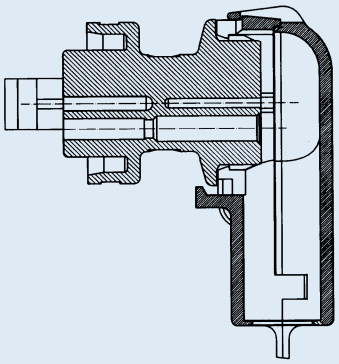opis Description		za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	rebrasta cijev Corrugated tube	NW 8,5 NW 10				
	5-pol. utično kućište sa kutnom zaštitnom kapom 5-pole pin housing with angle protection cap	za kontakt for contact Ø 1,6 mm NW 8,5 NW 10	crna black	Poliamid 6 Perbunan Polyamide 6 Perbunan	7806252 7806053	50 50
	5-pol. natično kućište sa kutnomzaštitnom kapom 5-pole jack housing with angle protection cap	za kontakt for contact Ø 1,6 mm NW 8,5 NW 10	crna black	Poliamid 6 Polyamide 6	7805255 7805056	50 50
	rebrasta cijev Corrugated tube	NW 8,5 NW 10				

8-polni utikač
SEAL (brtvljeni kontakt)

8-pole Plug
SEAL


ravni utikač
Straight plug


kutni utikač
Angle plug


utikač bez zaštitne kape
Plug without protection cap

IP 67

Materijal:
Poliamid 6
Silikon

Radna temperatura:
-40°C do 120°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna
- sklopovi za montažu od 100 kom na upit

Pribor (vidi poglavlje…):
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- obujmice za zaštitu vodiča (5.3) dodatno

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Silicone




Temperature range:
-40°C to 120°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- black
- Assembly packages from 100 pcs on request

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Secondary lock (5.3) optional

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
 rebrasta cijev Corrugated tube	NW 10				
 ravni utikač Straight plug		crna black	Poliamid 6 Silikon Polyamide 6 Silicone	9800681	50
 **ili/or:** kutni utikač 7 x Ø 1,6 mm Angle plug 1 x Ø 3,5 mm		crna black	Poliamid 6 Silikon Polyamide 6 Silicone	9800680	50
sa bravom with add. locking hole			Poliamid 6 Silikon Polyamide 6 Silicone	9800682	50
kutni utikač 8 x Ø 1,6 mm Angle plug				9800685	50
 **ili/or:** utikač bez zaštitne kape - nije moguća montaža sa rebrastom cijevi, - nisu primjenjive obujmice za zaštitu vodiča Plug without protection cap - no corrugated tube assembly possible, - no secondary locking applicable		crna black	Poliamid 6 Silikon Polyamide 6 Silicone	9800617	50

8-polna priključnica
SEAL (brtvljeni kontakt) za prirubnicu

8-pole Socket
SEAL for Flange Assembly


utično kućište
Pin housing


brtva plosnata
Flat sealing


prirubnica
Flange

IP 67

Materijal:
Poliamid 6
Silikon

Radna temperatura:
-40°C do 120°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu
- sklopovi za montažu od 100 kom na upit

Svojstva:
- za prirubnicu

Pribor (vidi poglavlje 5.2):
- kontakti
- brtve
- alati

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Silicone

Temperature range:
-40°C to 120°C
When used with accessories please mind the respective accessory temperature data.




Colour(s)/Designs:
- Colours: s. table
- Assembly packages from 100 pcs on request

Characteristics:
- for Flange assembly

Accessories (see chapter 5.2):
- Contacts
- Seals
- Tools

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description		boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	8-pol. utično kućište sa bajonetom 16 S 8-pole pin housing with bayonet 16 S 7 x Ø 1,6 mm 1 x Ø 3,5 mm	crna black	Poliamid 6 Polyamide 6	7806390	50
	8-pol. utično kućište sa bajonetom 16 S 8-pole pin housing with bayonet 16 S 8 x Ø 1,6 mm			7806391	50
	brtva plosnata Flat sealing	prozirna transparent	Silikon Silicone	7813032	50
	prirubnica Flange	crna black	Poliamid 6 Polyamide 6	7813015	50

8-polna priključnica
SEAL (brtvljeni kontakt) za rebrastu cijev

8-pole Socket
SEAL for corrugated tube assembly



utično kućište
Pin Housing

IP 67

Materijal:
Poliamid 6
Neopren

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- sklopovi za montažu od 100 kom na upit

Svojstva:
- za rebrastu cijev (dodatno moguća prirubnica)
- kontakti:
  7 x utični Ø: 1,6 mm
  1 x utični Ø: 3,5 mm
  na poziciji '8'

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- brtveni prsten (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 66
Neoprene




Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- Assembly packages from 100 pcs on request

Characteristics:
- for corrugated tube (optional flange possible)
- Contacts:
  7 x jack contact Ø: 1,6 mm
  1 x jack contact Ø: 3,5 mm
  on position '8'

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Clamp sealing (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP PU
 utično kućište sa bajonetom 16 S Pin housing with bayonet 16 S		crna black	Poliamid 6 Polyamide 6	9800575	50
sa bravom with add. locking hole		crna black	Poliamid 6 Polyamide 6	9800576	50
 brtva plosnata sa prirubnicom (dodatno) Flat sealing with Fange (optional)		prozirna transparent	Silikon Silicone	7813032	50
		crna black	Poliamid 6 Polyamide 6	7813015	50
 brtveni prsten Clamp sealing	NW 13	crna black	Neopren Neoprene	8117136	50
 rebrasta cijev Corrugated tube	NW 13				
 pričvrsna matica Cap nut	NW 13	siva grey	Poliamid Polyamide	9800956	50

16-polna priključnica
SEAL
(montaža)

16-pole Socket
SEAL
(Assembling)



utikač / Plug | priključnica (s prirubnicom) / Socket (with flange) | priključnica (bez prirubnice) / Socket (without flange)

IP 67

Materijal:
Poliamid 6/66
30% ojačan staklenim vlaknima
Silikon
Polikarbonat

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
- vidi tabelu za boje
- pakiranja za montažu od 100 komada na upit

Pribor (vidi poglavlje…):
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- međuprsten (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6/66
30 % glassfibre reinforced
Silicone
Polycarbonate









Temperature range:
-40°C to 105°C

Colour(s)/Designs:
- Colours see table
- Assembly packages from 100 pcs on request

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Center ring (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

Opis / Description	za / for	boja / Colour	materijal / Material	broj artikla / Art. no.	VE / PU
 prijelaz / Adaptor	NW 17	crna / black	PA 6/66	7807850	50
 utikač - utično kućište / Plug-pin housing utikač - natično kućište / Plug-jack housing		crna / black	PA 66 GF 30 Silikon/Silicone	7811110 7812100	50 50
dodatno međuprsten / **Optional** Center ring	optional	prozirna / transparent	Polikarbonat / Polycarbonate	7810400	50
 priključnica - natično kućište (s prirubnicom) / Socket-jack housing (with flange) priključnica - utično kućište (s prirubnicom) / Socket-pin housing (with flange)		crna / black	PA 66 GF 30 Silikon/Silicone	7812110 7811100	50 50
 prijelaz / Adaptor	NW 17	crna / black	PA 6/66	7807850	50
 prijelaz / Adaptor	NW 17	crna / black	PA 6/66	7807850	50
 utikač - utično kućište / Plug-pin housing utikač - natično kućište / Plug-jack housing		crna / black	PA 66 GF 30 Silikon/Silicone	7811110 7812100	50 50
dodatno međuprsten / **Optional** Center ring	optional	prozirna / transparent	Polikarbonat / Polycarbonate	7810400	50
 priključnica (bez prirubnice) / Socket-pin (without flange) priključnica - utično kućište (bez prirubnice) / Socket-pin housing (without flange)		crna / black	PA 6/66	7812210 7811200	50 50
 prijelaz (nerotirajući) / Adaptor (non rotable)	NW 17	crna / black		7807851	50

16-polni utikač/priključnica
SEAL (brtvljeni kontakt)

16-pole Plug/Socket
SEAL



utikač / Plug | priključnica (s prirubnicom) / Socket (with flange) | priključnica (bez prirubnice) / Socket (without flange)

IP 67

Materijal:
Poliamid 6/66
30% ojačan staklenim vlaknima
Silikon

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• vidi tabelu za boje

Pribor (vidi poglavlje…):
• kontakti (5.2)
• brtve (5.2)
• alati (5.2)

Upotreba:
• gospodarska vozila
• poljoprivredni strojevi
• građevinski strojevi

Material:
Polyamide 6/66
30 % glassfibre reinforced
Silicone

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• Colours see table

Accessories (see chapter…):
• Contacts (5.2)
• Seals (5.2)
• Tools (5.2)

Applications:
• Heavy trucks
• Agricultural machines
• Construction machines

5.2

Opis Description		Boja Colour	broj artikla Art. no.	JP PU
16-pol. utikač - utično kućište kontakti: 12 x utični Ø 1,6 mm 4 x utični Ø 3,5 mm	16 pole plug-pin housing Contacts: 12 x pin contact Ø 1,6 mm 4 x pin contact Ø 3,5 mm	crna black	7811110	50
16-pol. utikač - natično kućište kontakti: 12 x natični Ø 1,6 mm 4 x natični Ø 3,5 mm	16-pole plug-jack housing Contacts: 12 x jack contact Ø 1,6 mm 4 x jack contact Ø 3,5 mm	crna black	7812100	50
16-pol. priključnica -utično kućište (s prirubnicom) kontakti: 12 x utični Ø 1,6 mm 4 x utični Ø 3,5 mm	16-pole socket-pin housing (with flange) Contacts: 12 x pin contact Ø 1,6 mm 4 x pin contact Ø 3,5 mm	crna black	7811100	50
16-pol. priključnica - natično kućište (s prirubnicom) kontakti: 12 x natični Ø 1,6 mm 4 x natični Ø 3,5 mm	16-pole socket-jack housing (with flange) Contacts: 12 x jack contact Ø 1,6 mm 4 x jack contact Ø 3,5 mm	crna black	7812110	50
16-pol. priključnica - utično kućište (bez prirubnice) kontakti: 12 x utični Ø 1,6 mm 4 x utični Ø 3,5 mm	16-pole socket-pin housing (without flange) Contacts: 12 x pin contact Ø 1,6 mm 4 x pin contact Ø 3,5 mm	crna black	7811200	50
16-pol. priključnica - natično kućište (bez prirubnice) kontakti: 12 x natični Ø 1,6 mm 4 x natični Ø 3,5 mm	16-pole socket-jack housing (without flange) Contacts: 12 x jack contact Ø 1,6 mm 4 x jack contact Ø 3,5 mm	crna black	7812210	50

35-polni konektor
SEAL (brtvljeni kontakt) (montaža)

35-pole Connector
SEAL (Assembling)

IP 67



utikač
Plug



priključnica
Socket

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima
Neopren
Polikarbonat
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna/siva
- sklopovi za montažu od 100 komada na upit

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)
- prijelaz (5.3)
- ploča za centriranje (5.3)
- luk 90° (5.3)
- zaštitna kapa (5.3)
- obujmice za zaštitu vodiča (5.3) dodatno

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 66
30 % glassfibre reinforced
Neoprene
Polycarbonate
Silicone







Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- black/grey
- Assembly packages from 100 pcs on request

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)
- Adaptor (5.3)
- Center plate (5.3)
- 90°-angle (5.3)
- Dust cap (5.3)
- Secundary lock (5.3) optional

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
 pričvrsna matica Cap nut	NW 17 NW 22 NW 29	siva grey	Poliamid Polyamide	9800697 9800905 9801138	50 50 50
 rebrasta cijev Corrugated tube	NW 17 NW 22 NW 29				
 brtveni prsten Clamp sealing	NW 17 NW 22 NW 29	crna black	Neopren Neoprene	8117179 8117225 8117292	50 50 50
 prijelaz Adaptor	NW 17 NW 22 NW 29	crna black	Poliamid 66 GF30 Polyamide 66 GF30	7807259 7807260 7807341	50 50 50
 utikač-utično kućište Plug-pin housing utikač-natično kućište Plug-jack housing		crna black	Poliamid 66 GF30 Silikon Polyamide 66 GF30 Silicone	7811222 7812226	50 50
dodatno ploča za centriranje **optional** Center plate	**dodatno** **optional**	prozirna transparent	Polikarbonat Polycarbonate	7810403	50
 priključnica-natično kućište Socket-jack housing priključnica-utično kućište Socket-pin housing		crna black	Poliamid 66 GF30 Polyamide 66 GF30	7812218 7811230	50 50
 prijelaz Adaptor	NW 17 NW 22 NW 29	crna black	Poliamid 66 GF30 Polyamide 66 GF30	7807259 7807260 7807341	50 50 50
 brtveni prsten Clamp sealing	NW 17 NW 22 NW 29	crna black	Neopren Neoprene	8117179 8117225 8117292	50 50 50
 rebrasta cijev Corrugated tube **ili/or:** luk 90° 90°-angle	NW 17 NW 22 NW 29				
 pričvrsna matica Cap nut	NW 17 NW 22 NW 29	siva grey	Poliamid Polyamide	9800697 9800905 9801138	50 50 50

35-polni utikač/priključnica
SEAL (brtvljeni kontakt)

35-pole Plug/Socket
SEAL



utikač
Plug



priključnica
Socket

IP 67

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
• crna

Svojstva:
• u skladu sa VG 95234

Pribor (vidi poglavlje 5.2) :
• kontakti
• brtve
• alati

Upotreba:
• gospodarska vozila
• poljoprivredni strojevi
• građevinski strojevi

Material:
Polyamide 66
30 % glassfibre reinforced
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
• black

Charecteristics:
• similar to VG 95234

Accessories (see chapter 5.2):
• Contacts
• Seals
• Tools

Applications:
• Heavy trucks
• Agricultural machines
• Construction machines

5.2

opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
35-pol. utikač-utično kućište kontakti: 26 x utični Ø: 1,6 mm 9 x utični Ø: 3,5 mm	**35-pole plug-pin housing** contacts: 26 x pin contact Ø: 1,6 mm 9 x pin contact Ø: 3,5 mm	crna black	7811222	50
35-pol. utikač-natično kućište kontakti: 26 x natični Ø: 1,6 mm 9 x natični Ø: 3,5 mm	**35-pole plug-jack housing** contacts: 26 x jack contact Ø: 1,6 mm 9 x jack contact Ø: 3,5 mm	crna black	7812226	50
35-pol. priključnica-utično kućište kontakti: 26 x utični Ø: 1,6 mm 9 x utični Ø: 3,5 mm	**35-pole socket-pin housing** contacts: 26 x pin contact Ø: 1,6 mm 9 x pin contact Ø: 3,5 mm	crna black	7811230	50
35-pol. priključnica-natično kućište kontakti: 26 x natični Ø: 1,6 mm 9 x natični Ø: 3,5 mm	**35-pole socket-jack housing** contacts: 26 x jack contact Ø: 1,6 mm 9 x jack contact Ø: 3,5 mm	crna black	7812218	50

37-polni utikač
SEAL (brtvljeni kontakt)

37-pole Plug
SEAL



utikač
Plug

IP 67

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima
Perbunan
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna
- specijalni utikač na upit

Svojstva:
- u skladu sa VG 95234

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- brtve (5.2)
- alati (5.2)
- prijelaz (5.3)
- luk 90° (5.3)
- zaštitna kapa (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 66
30 % glassfibre reinforced
Perbunan
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- black
- special plug on request

Characteristics:
- similar to VG 95234

Accessories (see chapter…):
- Contacts (5.2)
- Seals (5.2)
- Tools (5.2)
- Adaptor (5.3)
- 90°-angle (5.3)
- Dust cap (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2






opis	Description	boja kom. Colour pcs.	broj artikla Art. no.	JP PU
37-pol. utikač **odgovara za SEAL** kontakti: 37 x utični ili natični Ø 1,6 mm	**37-pole plug-pin housing** **suitable for SEAL** contacts: 37 x pin or jack contact Ø 1,6 mm	crna black	7811375	50

Kontakti/brtve/alati za SEAL-konektore

Contacts / SEALS / Tools for SEAL Connectors

Materijal:
bronca
pokositrena

Material:
Bronze
Surface tin-plated

	Ø kontakta mm Ø Contact cavity mm	kontakt Single Contact broj artikla Art. no.	JP kom. PU pcs.	izolacija Strip material broj artikla Art. no.	JP kom. PU pcs.	presjek FLR-kabela in mm² Cross section FLR-wire (mm²)	4-pol natično kućište bez kompenzacije tlaka jack housing without pressure compensation 9800330,..331,..332,..333 9800350,..351,..352,..353 9800310,..311,..312,..313 9800374,..375,..376,..377	natično kućište sa kompenzacijom tlaka jack housing with pressure compensation 9800300,..301,..302,..303 9800320,..321,..322,..323 9800340,..341,..342,..343 9800384,..385,..386,..387
Kontakti/Contacts								
	6,7 *	7814125	1	7814123	2700	0,5 - 1,0		●
		7814126	1	7814124	2700	1,5 - 2,5		●
	4,0 **	7815045	1	7815046	4000	0,75 - 1,5		
		7814045	1	7814046	4500	0,75 - 1,5		
	5,2 ***	7815050	1	7815053	4000	0,5 - 1,0		
		7815051	1	7815052	4000	1,5 - 2,5		
		7814050	1	7814053	4000	0,5 - 1,0		
		7814051	1	7814052	4000	1,5 - 2,5		
	5,2 ****	7815047	1	7815049	3000	0,5 - 1,0		
		7815048	1	7815054	3000	1,5 - 2,5		
		7814047	1	7814049	3000	0,5 - 1,0		
		7814048	1	7814054	3000	1,5 - 2,5		
BRTVE								
	4,0	7814137	1			0,75 - 1,0		
		7814138	1			1,5		
	5,2	7814140	1			0,35 - 1,0		
		7814141	1			1,5 - 2,5		
	6,7	7814128	1			0,35 - 1,0		●
		7814129	1			1,5 - 2,5		●
BRTVE slijepe								
	4,0	7814135	1					
	5,2	7814136	1					
	6,7	7814130	1					●

Odgovarajuća kliješta za gnječenje / Suitable hand crimping pliers

*	7814146
* *	7814145
* * *	7814147
* * * *	7814148

Kontakti/brtve/alati za SEAL-konektore

Contacts / SEALs / Tools for SEAL Connectors

Materijal:
bronca
pokositrena

Material:
Bronze
Surface tin-plated

5-pol		8-pol			16-pol		35-pol		37-pol			
utično kućište pin-housing 7806248 7806249 7806252 7806053	natično kućište Socket-jack housing 7805252 7805253 7805255 7805056	utično kućište pin-housing 7806390 9800575 9800576	 7806391	natično kućište Socket-jack housing 9800680 9800681 9800617 9800682	utično kućište pin-housing 7811100 7811110 7811200	natično kućište Socket-jack housing 7812100 7812110 7812210	utično kućište pin-housing 7811222 7811230	natično kućište Socket-jack housing 7812218 7812226	utikač za muške/ženske kontakte plug for pin-jack contacts 7811375		utikač za muške/ženske kontakte plug for pin-/jack contacts 7811377 sa 12 zatvorenih otvora za kontakte with 12 closed contact cavities	
●					●(12)		●(26)		●(37)		●(25)	
	●					●(12)		●(26)		●(37)		●(25)
		●(7)	●(8)									
		●(7)	●(8)									
				●(7)								
				●(7)								
		●(1)			●(4)		●(9)					
		●(1)			●(4)		●(9)					
				●(1)		●(4)		●(9)				
				●(1)		●(4)		●(9)				
●	●				●(12)	●(12)	●(26)	●(26)	●(37)	●(37)	●(25)	●(25)
●	●				●(12)	●(12)	●(26)	●(26)	●(37)	●(37)	●(25)	●(25)
		●	●	●	●(4)	●(4)	●(9)	●(9)				
		●	●	●	●(4)	●(4)	●(9)	●(9)				
●	●				●(12)	●(12)	●(26)	●(26)	●(37)	●(37)	●(25)	●(25)
		●	●	●	●(4)	●(4)	●(9)	●(9)				

Odgovarajući alati za vađenje kontakata / Suitable extraction tools

*	7704484
* *	7704497
* * *	7704497
* * * *	7704489

3-polni konektor
nije SEAL (nebrtvljeni kontakt)

3-pole Connector
non SEAL


natično kućište
Jack housing


utično kućište
Pin housing

IP 67

Materijal:
Poliamid 66
Neopren
meki-PVC

Radna temperatura:
-35°C do 100°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu
- sklopovi za montažu od 100 kom na upit

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtva za kabel (5.3)
- zaporni prsten dodatno
- brtva za pojedinačne vodiče (5.3)
- brtveni prsten (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 66
Neoprene
Soft-PVC





Temperature range:
-35°C to 100°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- Colours: s. table
- Assembly packages from 100 pcs on request

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Sealing buffer (5.3)
- Locking ring optional
- Single wire sealing (5.3)
- Clamp sealing (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
 pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50
 brtva za kabel Sealing buffer	Ø 4,5 mm Ø 5,6 mm	crna black	Neopren Neoprene	8115516 8115508	50 50
ili/or uložak za brtvljenje Sealing insert	Ø 7 - 10,5 mm	zelena green	meki-PVC Soft-PVC	8115605	100
 kabel Cable	kabel Ø 4,5 mm Cable Ø 4,5 mm kabel Ø 5,6 mm Cable Ø 5,6 mm				
 3-pol. natično kućište PG11 3-pole jack housing PG11	za kontakt Ø 3,5 mm for contact Ø 3,5 mm	natur natural	Poliamid 66 Neopren Polyamide 66 Neoprene	7801017	50
 3-pol. utično kućište PG11 3-pole pin housing PG11	za kontakt Ø 3,5 mm for contact Ø 3,5 mm	natur natural	Poliamid 66 Polyamide 66	7801009	50
 **dodatno** brtva za pojedinačne vodiče **optional** Single wire sealing	**dodatno** **optional**	crna black	Neopren Neoprene	8113647	50
 brtveni prsten Clamp sealing	NW 8,5 NW 10	crna black	Neopren Neoprene	8117080 8117101	50 50
 rebrasta cijev Corrugated tube	NW 8,5 NW 10				
 pričvrsna matica Cap nut	NW 8,5 NW 10	siva grey	Poliamid Polyamide	9801324 9800689	50 50

5-polni konektor
nije SEAL (nebrtvljeni kontakt)

5-pole Connector
non SEAL



natično kućište
Jack housing



utično kućište
Pin housing

IP 67

Materijal:
Poliamid 6
Neopren
Perbunan

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna/siva
- ravna
- sklopovi za montažu od 100 kom na upit

Svojstva:
- spojni sistem Ø: 1,6 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Neoprene
Perbunan

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.







Colour(s)/Designs:
- black/grey
- straight
- Assembly packages from 100 pcs on request

Characteristics:
- Contact system Ø: 1,6 mm

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
 pričvrsna matica Cap nut	NW 8,5	siva	Poliamid	9801324	50
	NW 10	grey	Polyamide	9800689	50
 rebrasta cijev Corrugated tube	NW 8,5 NW 10				
 brtveni prsten Clamp sealing	NW 8,5	crna	Neopren	8117080	50
	NW 10	black	Neoprene	8117101	50
 5-pol. utično kućište PG11 5-pole pin housing PG11	za kontakt for contact Ø 1,6 mm	crna black	Poliamid 6 Perbunan Polyamide 6 Perbunan	7806043	50
 5-pol. natično kućište PG11 5-pole jack housing PG11	za kontakt for contact Ø 1,6 mm	crna black	Poliamid 6 Polyamide 6	7805047	50
 brtveni prsten Clamp sealing	NW 8,5	crna	Neopren	8117080	50
	NW 10	black	Neoprene	8117101	50
 rebrasta cijev Corrugated tube	NW 8,5 NW 10				
 pričvrsna matica Cap nut	NW 8,5	siva	Poliamid 6	9801324	50
	NW 10	grey	Polyamide 6	9800689	50

8-polni konektor

nije SEAL (nebrtvljeni kontakt) za prirubnicu

8-pole Connector

non SEAL for Flange Assembly



glava ravna / Straight cone — glava 90° / Angle cone — utično kućište / Pin housing — natično kućište / Jack housing

IP 67

5.2

Materijal:
Poliamid 6
Neopren
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu
- sklopovi za montažu od 100 kom na upit

Svojstva:
- kontakti
  7 x kontakt Ø: 1,6 mm
  1 x kontakt Ø: 3,5 mm
  na poziciji '8'

ili:
8 x kontakt Ø: 1,6 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)
- brtva za pojedinačne vodiče (5.3)
- brtva plosnata (5.3)
- prirubnica

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Neoprene
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.






Colour(s)/Designs:
- Colours: s. table
- Assembly packages from 100 pcs on request

Characteristics:
- Contacts:
  7 x contact Ø: 1,6 mm
  1 x contact Ø: 3,5 mm
  on position '8'

or:
8 x contact Ø: 1,6 mm

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)
- Single wire sealing (5.3)
- Flat sealing (5.3)
- Flange

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

opis Description		za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50
	rebrasta cijev Corrugated tube	NW 10				
	brtveni prsten Clamp sealing	NW 10	crna black	Neopren Neoprene	8117101	50
	glava ravna PG11 sa bajonetom 16 S u skladu sa VG 95234 Straight cone PG11 with bayonet 16 S similar VG 95234		crna black	Poliamid 6 Polyamide 6	9800611	50
	**ili/or:** glava 90° PG11 sa bajonetom 16 S Angle cone PG11 with bayonet 16 S		crna black	Poliamid 6 Polyamide 6	9800603	50
	brtva za pojedinačne vodiče Single wire sealing		crveno-smeđa red-brown	Silikon Silicone	8113646	50
	8-pol. natično kućište 8-pole jack housing	kontakti/contacts: 7 x Ø 1,6 mm 1 x Ø 3,5 mm **ili/or** 8 x Ø 1,6 mm	crna black	Poliamid 6 Polyamide 6	7805098 7805080	50 50
	brtva plosnata Flat sealing		crna black	Neopren Neoprene	8113424	50
	8-pol. utično kućište sa bajonetom 16 S u skladu sa VG 95234 8-pole pin housing with bayonet 16 S similar to VG 95234	kontakti/contacts: 7 x Ø 1,6 mm 1 x Ø 3,5 mm **ili/or:** 8 x Ø 1,6 mm	crna black	Poliamid 6 Polyamide 6	7806388 7806086	50 50
	brtva plosnata Flat sealing		natur natural	Silikon Silicone	7813032	50
	prirubnica Flange		crna black	Poliamid 6 Polyamide 6	7813015	50

8-polni konektor

nije SEAL (nebrtvljeni kontakt)
za rebrastu cijev

8-pole Connector

non SEAL
for corrugated Tube Assembly



glava ravna / **Straight cone** | **glava 90°** / **Angle cone** | **utično kućište** / **Pin housing** | **natično kućište** / **Jack housing**

IP 67

Materijal:
Poliamid 6
Neopren
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu
- sklopovi za montažu od 100 kom na upit

Svojstva:
- kontakti
  7 x kontakt Ø: 1,6 mm
  1 x kontakt Ø: 3,5 mm
  na poziciji '8'
  ili:
  8 x kontakt Ø: 1,6 mm

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)
- brtva za pojedinačne vodiče (5.3)
- brtva plosnata (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Neoprene
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.






Colour(s)/Designs:
- Colours: s. table
- Assembly packages from 100 pcs on request

Characteristics:
- Contacts:
  7 x contact Ø: 1,6 mm
  1 x contact Ø: 3,5 mm
  on position '8'
  or:
  8 x contact Ø: 1,6 mm

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)
- Single wire sealing (5.3)
- Flat sealing (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
 pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50
 rebrasta cijev Corrugated tube	NW 10				
 brtveni prsten Clamp sealing	NW 10	crna black	Neopren Neoprene	8117101	50
 glava ravna PG11 sa bajonetom 16 S u skladu sa VG 95234 Straight cone PG11 with bayonet 16 S similar VG 95234		crna black	Poliamid 6 Polyamide 6	9800611	50
 **ili/or:** glava 90° PG11 sa bajonetom 16 S Angle cone PG11 with bayonet 16 S		crna black	Poliamid 6 Polyamide 6	9800603	50
 brtva za pojedinačne vodiče Single wire sealing		crveno-smeđa red-brown	Silikon Silicone	8113646	50
 8-pol. natično kućište 8-pole jack housing	kontakti/contacts: 7 x Ø 1,6 mm/1 x Ø 3,5 mm	crna black	Poliamid 6 Polyamide 6	7805098	50
	ili/or: 8 x Ø 1,6 mm			7805080	50
brtva plosnata Flat sealing		crna black	Neopren Neoprene	8113424	50
 8-pol. utično kućište sa bajonetom 16 S 8-pole pin housing with bayonet 16 S	kontakti/contacts: 7 x Ø 1,6 mm 1 x Ø 3,5 mm	crna black	Poliamid 6 Polyamide 6	9800573	50
	ili/or: 8 x Ø 1,6 mm			7806051	50
 brtveni prsten Clamp sealing	NW 13	crna black	Neopren Neoprene	8117136	50
 rebrasta cijev Corrugated tube	NW 13				
 pričvrsna matica Cap nut	NW 13	siva grey	Poliamid 6 Polyamide 6	9800956	50

16-polni konektor

nije SEAL (nebrtvljeni kontakt) (montaža)

16-pole Connector

non SEAL (Assembling)

IP 67



priključnica
Socket



utikač
Plug

5.2

Materijal:
Poliamid 6/66
30 % ojačan staklenim vlaknima
Neopren
Perbunan
Polikarbonat
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu
- sklopovi za montažu od 100 kom na upit

Svojstva:
- u skladu sa VG 95234

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)
- prijelaz (5.3)
- pritisna ploča (5.3)
- brtvena ploča (5.3)
- ploča za centriranje (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6/66
30 % glassfibre reinforced
Neoprene
Perbunan
Polycarbonate
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- Colours: s. table
- Assembly packages from 100 pcs on request

Characteristics:
- similar to VG 95234

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)
- Adaptor (5.3)
- Pressure plate (5.3)
- Sealing plate (5.3)
- Center plate (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
pričvrsna matica Cap nut	NW 22	siva grey	Poliamid Polyamide	9800905	50
brtveni prsten Clamp sealing	NW 22	crna black	Neopren Neoprene	8117225	50
rebrasta cijev Corrugated tube	NW 22				
prijelaz Adaptor	NW 22	crna black	Poliamid 66 GF 30 Polyamide 66 GF 30	7807163	50
pritisna ploča Pressure plate		crna black	Poliamid 6 Polyamide 6	7810394	50
brtvena ploča Sealing plate		prozirna transparent	Silikon Silicone	7810164	50
utikač - utično kućište Plug - pin housing		crna black	Poliamid 66 GF 30 Perbunan, Silikon	7811160	50
utikač - natično kućište Plug - jack housing			Polyamide 66 GF 30 Perbunan, Silicone	7812162	50
dodatno ploča za centriranje **optional** Center plate	**dodatno** **optional**	prozirna transparent	Polikarbonat Polycarbonate	7810400	50
priključnica- natično kućište Socket - jack housing		crna black	Poliamid 66 GF 30 Perbunan	7812167	50
priključnica- utično kućište Socket - pin housing			Polyamide 66 GF 30 Perbunan	7811163	50
brtvena ploča Sealing plate		prozirna transparent	Silikon Silicone	7810164	50
pritisna ploča Pressure plate		crna black	Poliamid 6 Polyamide 6	7810394	50
prijelaz Adaptor	NW 22	crna black	Poliamid 66 GF 30 Polyamide 66 GF 30	7807163	50
brtveni prsten Clamp sealing	NW 22	crna black	Neopren Neoprene	8117225	50
rebrasta cijev Corrugated tube	NW 22				
pričvrsna matica Cap nut	NW 22	siva grey	Poliamid Polyamide	9800905	50

16-polni utikač/priključnica
nije SEAL (nebrtvljeni kontakt)

16-pole Plug/Socket
non SEAL

IP 67



utikač
Plug



priključnica
Socket

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima
Perbunan
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
• crna

Svojstva:
• u skladu sa VG 95234

Pribor (vidi poglavlje 5.2) :
• kontakti
• alati

Upotreba:
• gospodarska vozila
• poljoprivredni strojevi
• građevinski strojevi

Material:
Polyamide 66
30 % glassfibre reinforced
Perbunan
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
• black

Characteritics:
• similar to VG 95234

Accessories (see chapter 5.2):
• Contacts
• Tools

Applications:
• Heavy trucks
• Agricultural machines
• Construction machines

5.2

opis / Description	boja / Colour	broj artikla / Art. no.	JP kom. / PU pcs.
16-pol. utikač - utično kućište kontakti: 12 x utični Ø: 1,6 mm 4 x utični Ø: 3,5 mm **16-pole plug - pin housing** contacts: 12 x pin contact Ø: 1,6 mm 4 x pin contact Ø: 3,5 mm	crna black	7811160	50
16-pol. utikač - natično kućište kontakti: 12 x natični Ø: 1,6 mm 4 x natični Ø: 3,5 mm **16-pole plug - jack housing** contacts: 12 x jack contact Ø: 1,6 mm 4 x jack contact Ø: 3,5 mm	crna black	7812162	50
16-pol. priključnica- utično kućište kontakti: 12 x utični Ø: 1,6 mm 4 x utični Ø: 3,5 mm **16-pole socket - pin housing** contacts: 12 x pin contact Ø: 1,6 mm 4 x pin contact Ø: 3,5 mm	crna black	7811163	50
16-pol. priključnica- natično kućište kontakti: 12 x natični Ø: 1,6 mm 4 x natični Ø: 3,5 mm **16-pole socket - jack housing** contacts: 12 x jack contact Ø: 1,6 mm 4 x jack contact Ø: 3,5 mm	crna black	7812167	50

21-polni konektor

nije SEAL (nebrtvljeni kontakt) (sklop)

21-pole Connector

non SEAL (Assembly)

IP 67



utikač
Plug



priključnica
Socket

Materijal:
Poliamid 6/66
30 % ojačan staklenim vlaknima
Neopren
Perbunan
Polikarbonat
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu
- sklopovi za montažu od 100 kom na upit

Svojstva:
- u skladu sa VG 95234

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)
- prijelaz (5.3)
- luk 90° (5.3)
- ploča za centriranje (5.3)
- pritisna ploča (5.3)
- brtvena ploča (5.3)
- zaštitna kapa (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6/66
30 % glassfibre reinforced
Neoprene
Perbunan
Polycarbonate
Silicone






Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- Colours: s. table
- Assembly packages from 100 pcs on request

Characteristics:
- similar to VG 95234

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)
- Adaptor (5.3)
- 90°-angle (5.3)
- Center plate (5.3)
- Pressure plate (5.3)
- Sealing plate (5.3)
- Dust cap (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
 pričvrsna matica Cap nut	NW 17 NW 22 NW 29	siva grey	Poliamid Polyamide	9800697 9800905 9801138	50 50 50
 brtveni prsten Clamp sealing	NW 17 NW 22 NW 29	crna black	Neopren Neoprene	8117179 8117225 8117292	50 50 50
 rebrasta cijev Corrugated tube	NW 17 NW 22 NW 29				
 prijelaz Adaptor	NW 17 NW 22 NW 29	crna black	Poliamid 66 GF 30 Polyamide 66 GF 30	7807259 7807260 7807341	50 50 50
pritisna ploča Pressure plate		crna black	Poliamid 6 Polyamide 6	7810393	50
brtvena ploča Sealing plate		prozirna transparent	Silikon Silicone	7810210	50
 utikač - utično kućište Plug - pin housing		crna black	Poliamid 66 GF 30 Perbunan, Silikon Polyamide 66 GF 30 Perbunan, Silicone	7811217	50
utikač - natično kućište Plug - jack housing				7812221	50
dodatno ploča za centriranje **optional** Center plate	**dodatno** **optional**	prozirna transparent	Polikarbonat Polycarbonate	7810401	50
 priključnica- natično kućište Socket - jack housing		crna black	Poliamid 66 GF 30 Perbunan Polyamide 66 GF 30 Perbunan	7812213	50
priključnica- utično kućište Socket - pin housing				7811225	50
brtvena ploča Sealing plate		prozirna transparent	Silikon Silicone	7810210	50
pritisna ploča Pressure plate		crna black	Poliamid 6 Polyamide 6	7810393	50
 prijelaz Adaptor	NW 17 NW 22 NW 29	crna black	Poliamid 66 GF 30 Polyamide 66 GF 30	7807259 7807260 7807341	50 50 50
 brtveni prsten Clamp sealing **ili/or:**	NW 17 NW 22 NW 29	crna black	Neopren Neoprene	8117179 8117225 8117292	50 50 50
 rebrasta cijev Corrugated tube luk 90° 90°-angle	NW 17 NW 22 NW 29				
 pričvrsna matica Cap nut	NW 17 NW 22 NW 29	siva grey	Poliamid Polyamide	9800697 9800905 9801138	50 50 50

21-polni utikač/priključnica
nije SEAL (nebrtvljeni kontakt)

21-pole Plug/Socket
non SEAL

IP 67



utikač
Plug



priključnica
Socket

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima
Perbunan
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
• crna

Svojstva:
• u skladu sa VG 95234

Pribor (vidi poglavlje 5.2) :
• kontakti
• alati

Upotreba:
• gospodarska vozila
• poljoprivredni strojevi
• građevinski strojevi

Material:
Polyamide 66
30 % glassfibre reinforced
Perbunan
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
• black

Characteristics:
• similar to VG 95234

Accessories (see chapter 5.2):
• Contacts
• Tools

Applications:
• Heavy trucks
• Agricultural machines
• Construction machines

5.2

opis / Description	boja / Colour	broj artikla / Art. no.	JP kom. / PU pcs.
21-pol. utikač - utično kućište kontakti: 14 x utični Ø: 1,6 mm 7 x utični Ø: 3,5 mm **21-pole plug - pin housing** contacts: 14 x pin contact Ø: 1,6 mm 7 x pin contact Ø: 3,5 mm	crna black	7811217	50
21-pol. utikač - natično kućište kontakti: 14 x natični Ø: 1,6 mm 7 x natični Ø: 3,5 mm **21-pole plug - jack housing** contacts: 14 x jack contact Ø: 1,6 mm 7 x jack contact Ø: 3,5 mm	crna black	7812221	50
21-pol. priključnica- utično kućište kontakti: 14 x utični Ø: 1,6 mm 7 x utični Ø: 3,5 mm **21-pole socket - pin housing** contacts: 14 x pin contact Ø: 1,6 mm 7 x pin contact Ø: 3,5 mm	crna black	7811225	50
21-pol. priključnica- natično kućište kontakti: 14 x natični Ø: 1,6 mm 7 x natični Ø: 3,5 mm **21-pole socket - jack housing** contacts: 14 x jack contact Ø: 1,6 mm 7 x jack contact Ø: 3,5 mm	crna black	7812213	50

37-polni konektor

nije SEAL (nebrtvljeni kontakt) (sklop)

37-pole Connector

non SEAL (Assembling)



utikač
Plug



priključnica
Socket

IP 67

Materijal:
Poliamid 6/66
30 % ojačan staklenim vlaknima
Neopren
Perbunan
Polikarbonat
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- Boje: vidi tabelu

Svojstva:
- utikač postoji i u verziji SEAL
- u skladu sa VG 95234

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- pričvrsna matica (5.3)
- brtveni prsten (5.3)
- prijelaz (5.3)
- luk 90° (5.3)
- ploča za centriranje (5.3)
- pritisna ploča (5.3)
- brtvena ploča (5.3)
- zaštitna kapa (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6/66
30 % glassfibre reinforced
Neoprene
Perbunan
Polycarbonate
Silicone






Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- Colours: s. table

Characteristics:
- Plug also available for SEAL
- similar to VG 95234

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Cap nut (5.3)
- Clamp sealing (5.3)
- Adaptor (5.3)
- 90°-angle (5.3)
- Center plate (5.3)
- Pressure plate (5.3)
- Sealing plate (5.3)
- Dust cap (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

opis Description		za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	pričvrsna matica Cap nut	NW 17 NW 22 NW 29	siva grey	Poliamid Polyamide	9800697 9800905 9801138	50 50 50
	rebrasta cijev Corrugated tube	NW 17 NW 22 NW 29				
	brtveni prsten Clamp sealing	NW 17 NW 22 NW 29	crna black	Neopren Neoprene	8117179 8117225 8117292	50 50 50
	prijelaz Adaptor	NW 17 NW 22 NW 29	crna black	Poliamid 66 GF 30 Polyamide 66 GF 30	7807259 7807260 7807341	50 50 50
	pritisna ploča Pressure plate		crna black	Poliamid 6 Polyamide 6	7810385	50
	brtvena ploča Sealing plate		prozirna transparent	Silikon Silicone	7810377	50
	37-pol. utikač 37-pole plug		crna black	Poliamid 66 GF 30 Perbunan, Silikon Polyamide 66 GF 30 Perbunan, Silicone	7811373	50
	ploča za centriranje Center plate		prozirna transparent	Polikarbonat Polycarbonate	7810402	50
	37-pol. priključnica 37-pole socket		crna black	Poliamid 66 GF 30 Perbunan Polyamide 66 GF 30 Perbunan	7812370	50
	brtvena ploča Sealing plate		prozirna transparent	Silikon Silicone	7810377	50
	pritisna ploča Pressure plate		crna black	Poliamid 6 Polyamide 6	7810385	50
	prijelaz Adaptor	NW 17 NW 22 NW 29	crna black	Poliamid 66 GF 30 Polyamide 66 GF 30	7807259 7807260 7807341	50 50 50
	brtveni prsten Clamp sealing	NW 17 NW 22 NW 29	crna black	Neopren Neoprene	8117179 8117225 8117292	50 50 50
	rebrasta cijev Corrugated tube	NW 17 NW 22 NW 29				
	pričvrsna matica Cap nut	NW 17 NW 22 NW 29	siva grey	Poliamid Polyamide	9800697 9800905 9801138	50 50 50

ili/or: luk 90° / 90°-angle

Schlemmer

37-polni utikač/priključnica
nije SEAL (nebrtvljeni kontakt)

37-pole Plug/Socket
non SEAL

IP 67



utikač
Plug



priključnica
Socket

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima
Perbunan
Silikon

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna
- specijalni utikač na upit

Svojstva:
- utikač postoji i u verziji SEAL
- u skladu sa VG 95234

Pribor (vidi poglavlje 5.2) :
- kontakti
- alati

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 66
30 % glassfibre reinforced
Perbunan
Silicone

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- black
- Special plug on request

Characteristics:
- Plug also available for SEAL
- similar to VG 95234

Accessories (see chapter 5.2):
- Contacts
- Tools

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2


opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
37-pol. utikač kontakti: 37 x utični ili natični Ø 1,6 mm	**37-pole plug** contacts: 37 x pin or jack contact Ø 1,6 mm	crna black	7811373	50
37-pol. priključnica kontakti: 37 x utični ili natični Ø 1,6 mm	**37-pole socket** contacts: 37 x pin or jack contact Ø 1,6 mm	crna black	7812370	50

Natični kontakti

za "nije SEAL" (za nebrtvljeni kontakt) i 3-pol. specijalne konektore

Jack contacts

for non SEAL and 3-pole Special Connectors



Radna temperatura:
-40°C do 130°C

Svojstva:
- jedinično opterećenje:
  kontakt Ø 1,6 mm = 13 A
  kontakt Ø 3,5 mm = 25 A
- Susjedni kontakti smiju biti opterećeni sa 50% dozvoljenog jediničnog opterećenja

Temperature range:
-40°C to 130°C

Characteristics:
- Single load capacity:
  Connector Ø 1,6 mm = 13 A
  Connector Ø 3,5 mm = 25 A
- Directly nearby contacts are to be loaded with 50 % of single load capacity.

5.2

Ø Ø	presjek vodiča Nominal cross section	kontakt broj artikla Single contact Art. no.	JP kom. PU pcs.	izolacija broj artikla Strip material Art. no	JP kom. PU pcs.
1,6 mm	0,5 - 1,0 mm²	7814009	1	7702954	4500
1,6 mm	>1,0 - 2,5 mm²	7814011	1	7814012	3500
3,5 mm	>1,0 - 2,5 mm²	7702957	1	7702959	3000
3,5 mm	>2,5 - 6,0 mm²	7814038	1	7814039	3000

Utični kontakti

za "nije SEAL" (za nebrtvljeni kontakt) i 3-pol. specijalne konektore

Pin contacts

for non SEAL and 3-pole Special Connectors



Radna temperatura:
-40°C do 130°C

Svojstva:
- jedinično opterećenje:
  kontakt Ø 1,6 mm = 13 A
  kontakt Ø 3,5 mm = 25 A
- Susjedni kontakti smiju biti opterećeni sa 50% dozvoljenog jediničnog - opterećenja

Temperature range:
-40°C to 130°C

Characteristics:
- Single load capacity:
  Connector Ø 1,6 mm = 13 A
  Connector Ø 3,5 mm = 25 A
- Directly nearby contacts are to be loaded with 50 % of single load capacity.


Ø Ø	presjek vodiča Nominal cross section	kontakt broj artikla Single contact Art. no.	JP kom. PU pcs.	izolacija broj artikla Strip material Art. no	JP kom. PU pcs.
1,6 mm	0,5 - 1,0 mm²	7815016	1	7702952	5000
1,6 mm	>1,0 - 2,5 mm²	7815018	1	7702950	3000
3,5 mm	>1,0 - 2,5 mm²	7702949	1	7815036	3000
3,5 mm	>2,5 - 6,0 mm²	7815034	1	7815035	3000

Alati za utično/natične kontakte

primjena za "nije SEAL" (nebrtvljeni kontakt)

Tools for Pin-/Jack contacts

non SEAL-Applications

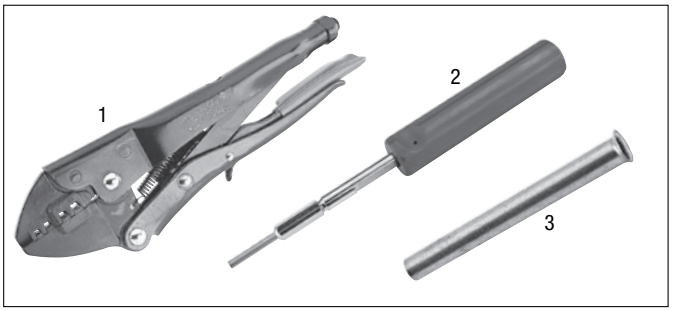

Ostali alati na upit.

Further tools on request.

5.2

opis Description	za Ø for Ø	broj artikla Art. no.	JP kom. PU pcs.
Ručna kliješta za gnječenje (1) Hand crimping pliers (1)	1,6 mm/3,5 mm	7704501	1
Alat za vađenje kontakata (2) Extraction tool (2)	1,6 mm 3,5 mm	7704497 7704489	1 1
Zamijenski naglavak na alatu za vađenje kontakata (3) Replacement sleeve for extraction tool (3)	3,5 mm	7704461	1

Specijalni konektor 3-polni

Special Connectors 3-pole


glava ravna
Straight cone


glava 90°
Angle cone

IP 67

Materijal:
Poliamid 6
Neopren
Perbunan

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna/siva

Svojstva:
- za rebrastu cijev NW 10
- glava ravna ili glava 90°
- sa bajonetom 10 SL
- sa navojem PG 11
- sa navojem M 18 x 1

Pribor (vidi poglavlje…) :
- kontakti (5.2)
- alati (5.2)
- brtva za pojedinačne vodiče (5.3)
- brtveni prsten (5.3)
- pričvrsna matica (5.3)
- slijepa brtva

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Neoprene
Perbunan






Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
- black/grey

Characteristics:
- for corrugated tube NW 10
- Straight cone or angle cone
- with bayonet 10 SL
- with thread PG 11
- with thread M 18 x 1

Accessories (see chapter…):
- Contacts (5.2)
- Tools (5.2)
- Single wire sealing (5.3)
- Clamp sealing (5.3)
- Cap nut (5.3)
- Blind plug

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

	opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	dodatno slijepa brtva **optional** Blind plug	**dodatno** **optional**		Poliamid 6 Polyamide 6	7807380	50
	natični kontakt Jack contact	Ø 1,6 mm			7814011	1
	3-polno natično kućište 3-pole jack-housing		crna black	Poliamid 6 Polyamide 6	7805039	50
	O-brtva (posebno se naručuje) O-ring (order separately)			Perbunan Perbunan	8112495	1
 PG 11	glava ravna PG 11 sa bajonetom 10 SL Straight cone PG 11 with bayonet 10 SL				9800582	50
	glava ravna PG 11 sa navojem PG 11 Straight cone PG 11 with thread PG 11		crna black	Poliamid 6 Polyamide 6	9800591	50
	glava ravna PG 11 sa navojem M 18 x 1 Straight cone PG 11 with thread M 18 x 1				9800787	50
 PG 11	**ili/or:** glava 90° PG 11 sa bajonetom 10 SL Angle cone PG 11 with bayonet 10 SL				9800581	50
	glava 90° PG 11 sa navojem PG 11 Angle cone PG 11 with thread PG 11		crna black	Poliamid 6 Polyamide 6	9800590	50
	glava 90° PG 11 sa navojem M 18 x 1 Angle cone PG 11 with thread M 18 x 1				9800786	50
	brtva za pojedinačne vodiče Single wire sealing		crna black	Neopren Neoprene	8113647	50
	brtveni prsten Clamp sealing	NW 10	crna black	Neopren Neoprene	8117101	50
	rebrasta cijev Corrugated tube	NW 10				
	pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50

5.2

Sklopovi za montažu specijalnog konektora 3-polnog

Assembly Packages Special Connectors 3-pole



glava ravna
Straight cone



glava 90°
Angle cone

IP 67

Materijal:
Poliamid 6
Neopren
Perbunan

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
• crna/siva

Svojstva:
• glava ravna ili glava 90°
• sa bajonetom 10 SL
• za rebrastu cijev NW 10

Pribor (vidi poglavlje 5.2) :
• kontakti
• alati

Upotreba:
• gospodarska vozila
• poljoprivredni strojevi
• građevinski strojevi

Material:
Polyamide 6
Neoprene
Perbunan

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.

Colour(s)/Designs:
• black/grey

Characteristics:
• Straight cone or angle cone
• with bayonet 10 SL
• for corrugated tube NW 0

Accessories (see chapter 5.2):
• Contacts
• Tools

Applications:
• Heavy trucks
• Agricultural machines
• Construction machines

5.2

stavka Item	opis Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
sklop s glavom ravnom s bajonetom 10 SL, sastoji se od: **Assembly package straight cone with bayonet 10 SL, consisting of:**			7800063	100
1	3-polno natično kućište 3-pole jack housing	crna black	7805039	1
2	natični kontakt Jack contact		7814011	3
3	O-brtva 10 x 2,5 O-ring 10 x 2,5	crna black	8112495	1
4	brtveni prsten Clamp sealing	crna black	8117101	1
5	glava ravna PG 11 sa bajonetom 10 SL Straight cone PG 11 with bayonet 10 SL	crna black	9800582	1
6	pričvrsna matica Cap nut	siva grey	9800689	1

stavka Item	opis Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
sklop s glavom 90° s bajonetom 10 SL, sastoji se od: **Assembly package angle cone with bayonet 10 SL, consisting of:**			7800064	100
1	3-polno natično kućište 3-pole jack housing	crna black	7805039	1
2	natični kontakt Jack contact		7814011	3
3	O-brtva 10 x 2,5 O-ring 10 x 2,5	crna black	8112495	1
4	brtveni prsten NW 10 Clamp sealing NW 10	crna black	8117101	1
5	glava 90° PG 11 sa bajonetom 10 SL Angle cone PG 11 with bayonet 10 SL	crna black	9800581	1
6	pričvrsna matica Cap nut	siva grey	9800689	1

Specijalni konektor sa navojem M 24x1 2-/3-polni

Special Connectors with Thread M 24 x 1 2-/3-pole



glava ravna
Straight cone



glava 90°
Angle cone

IP 67

Materijal:
Poliamid 6
Neopren

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna/siva
- sklopovi za montažu od 100 kom na upit
- *) izolacija na upit

Svojstva:
- za rebrastu cijev NW 10
- glava ravna ili glava 90°
- sa navojem M 24 x 1

Pribor (vidi poglavlje…):
- kontakti
- alati
- brtva
- brtva za pojedinačne vodiče (5.3)
- brtveni prsten (5.3)
- pričvrsna matica (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Neoprene

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.






Colour(s)/Designs:
- black/grey
- Assembly packages from 100 pcs on request
- *) stripmaterial on request

Characteristics:
- for corrugated tube NW 10
- Straight cone or angle cone
- with thread M 24 x 1

Accessories (see chapter…):
- Contacts
- Tools
- Sealings
- Single wire sealings (5.3)
- Clamp sealing (5.3)
- Cap nut (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

	opis Description	za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	kontakt za gnječenje Ø 4 mm Crimp contact Ø 4 mm	2-polni 2-pole			7702973 *)	1
	kontakt za lemljenje Ø 4 mm Solder contact Ø 4 mm	3-polni 3-pole			7702965	1
	brtva Sealing	2-polna 2-pole	crna black	Neopren Neoprene	7800592	50
		3-polna 3-pole	crna black	Neopren Neoprene	7800593	50
 PG 11	glava ravna PG 11 sa navojem M 24 x 1 Straight cone PG 11 with thread M 24 x 1		crna black	Poliamid 6 Polyamide 6	9800557	50
 PG 11	**ili/or:** glava 90° PG 11 sa navojem M 24 x 1 Angle cone with thread M 24 x 1		crna black	Poliamid 6 Polyamide 6	9800999	50
	brtva za pojedinačne vodiče Single wire sealing		crna black	Neopren Neoprene	8113647	50
	brtveni prsten Clamp sealing		crna black	Neopren Neoprene	8117101	50
	rebrasta cijev Corrugated tube	NW 10				
	pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50

Specijalni konektor sa navojem M 27x1 2-/3-/4-polni

Special Connectors with Thread M 27 x1 2-/3-/4-pole



glava ravna
Straight cone



glava 90°
Angle cone

IP 67

Materijal:
Poliamid 6
Neopren
mesing niklani

Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora

Boje/izvedbe:
- crna/siva
- sklopovi za montažu od 100 kom na upit
- *) izolacija na upit

Kennzeichen:
- glava ravna ili glava 90°
- sa navojem M 27 x 1
- za rebrastu cijev NW 10

Pribor (vidi poglavlje…) :
- kontakti
- alati
- redukcija
- brtva (5.2)
- brtva za pojedinačne vodiče (5.3)
- brtveni prsten (5.3)
- pričvrsna matica (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi

Material:
Polyamide 6
Neoprene
brass nickel-plated

Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.







Colour(s)/Designs:
- black/grey
- Assembly packages from 100 pcs on request
- *) stripmaterial on request

Characteristics:
- Straight cone or angle cone
- with thread M 27 x 1
- for Corrugated tube NW 10

Accessories (see chapter…):
- Contacts
- Tools
- Reduction
- Sealing (5.2)
- Single wire sealing (5.3)
- Clamp sealing (5.3)
- Cap nut (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description		za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	**dodatno** redukcija **optional** Reduction	**dodatno** M 27/M 24 **optional** M 27/M 24		mesing niklani brass nickel-plated	6100333	50
	kontakt za gnječenje Crimp contact	2-/4-polni 2-/4-pole			7702973 *)	1
	kontakt za lemljenje Solder contact	3-polni 3-pole			7702965	1
	brtva Sealing	2-polna 2-pole	crna black	Neopren Neoprene	7800665/7800711	50
		3-polna 3-pole	crna black	Neopren Neoprene	7800673	50
		4-polna 4-pole	crna black	Neopren Neoprene	7800681	50
	glava ravna PG 11 sa navojem M 27 x 1 Straight cone PG 11 with thread M 27 x 1		crna black	Poliamid 6 Polyamide 6	9800794	50
	**ili/or:** glava 90° PG 11 sa navojem M 27 x 1 Angle cone PG 11 with thread M 27 x 1		crna black	Poliamid 6 Polyamide 6	9800808	50
	brtva za pojedinačne vodiče Single wire sealing		crna black	Neopren Neoprene	8113647	50
	brtveni prsten Clamp sealing	NW 10	crna black	Neopren Neoprene	8117101	50
	rebrasta cijev Corrugated tube	NW 10				
	pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50

Specijalni konektor sa bajonetom 2-/3-/4-polni

Special Connectors with Bayonet 2-/3-/4-pole



glava ravna
Straight cone



glava 90°
Angle cone

IP 67

Materijal:
Poliamid 6
Neopren
Radna temperatura:
-40°C do 105°C
Kada se koristi sa priborom treba uzeti u obzir podatke o radnoj temperaturi pribora
Boje/izvedbe:
- crna/siva
- sklopovi za montažu od 100 kom na upit
- *) izolacija na upit

Svojstva:
- glava ravna ili glava 90°
- sa bajonetom 16S
- za rebrastu cijev NW 10

Pribor (vidi poglavlje…) :
- kontakti
- alati
- brtva (5.2)
- brtva za pojedinačne vodiče (5.3)
- brtveni prsten (5.3)
- pričvrsna matica (5.3)

Upotreba:
- gospodarska vozila
- poljoprivredni strojevi
- građevinski strojevi





Material:
Polyamide 6
Neoprene
Temperature range:
-40°C to 105°C
When used with accessories please mind the respective accessory temperature data.
Colour(s)/Designs:
- black/grey
- Assembly packages from 100 pcs on request
- *) stripmaterial on request

Characteristics:
- Straight cone or angle cone
- with bayonet 16S
- for corrugated tube NW 10

Accessories (see chapter…):
- Contacts
- Tools
- Sealing (5.2)
- Single wire sealing (5.3)
- Clamp sealing (5.3)
- Cap nut (5.3)

Applications:
- Heavy trucks
- Agricultural machines
- Construction machines

5.2

opis Description		za for	boja Colour	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
	kontakt za gnječenje Crimp contact	2-/4-polni 2-/4-pole			7702973 *)	1
	kontakt za lemljenje Solder contact	3-polni 3-pole			7702965	1
	brtva Sealing	2-polna /2-pole	crna black	Neopren Neoprene	7800630/7800704	500
		3-polna /3-pole	crna black	Neopren Neoprene	7800622	500
		4-polna /4-pole	crna black	Neopren Neoprene	7800615/7800738	500
	glava ravna PG 11 sa bajonetom 16 S Straight cone PG 11 with bayonet 16 S		crna black	Poliamid 6 Polyamide 6	9800611	50
	**ili/or:** glava 90° PG 11 sa bajonetom 16 S Angle cone PG 11 with bayonet 16 S		crna black	Poliamid 6 Polyamide 6	9800603	50
	brtva za pojedinačne vodiče Single wire sealing		crna black	Neopren Neoprene	8113647	50
	brtveni prsten Clamp sealing	NW 10	crna black	Neopren Neoprene	8117101	50
	rebrasta cijev Corrugated tube	NW 10				
	pričvrsna matica Cap nut	NW 10	siva grey	Poliamid Polyamide	9800689	50

Brtve
za specijalne konektore

Sealings
for Special Connectors


brtva sa 2 otvora
2-hole sealing


brtva sa 3 otvora
3-hole sealing


brtva sa 4 otvora
4-hole sealing

IP 67

Materijal:
Neopren

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• crna

Svojstva:
• za vodiče FLRY i FLY






Material:
Neoprene

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black

Characteristics:
• for wires FLRY and FLY

5.2

opis Description	za for	izvedba Type	Z mm Z mm	broj artikla Art. no.	JP kom. PU pcs.
brtva sa 2 otvora 2-hole sealing 	glava ravna ili glava 90° sa navojem M 27 x 1 Straight cone or angle cone with thread M 27 x 1	2 x jednostruko upleten kabel 2 x Single-cable crimping	3,5	7800665	500
	glava ravna ili glava 90° sa bajonetom 16S Straight cone or angle cone with bayonet 16S		5,5	7800630	500
brtva sa 2 otvora 2-hole sealing 	glava ravna ili glava 90° sa navojem M 27 x 1 Straight cone or angle cone with thread M 27 x 1	1 x jednostruko upleten kabel 1 x dvostruko upleten kabel 1 x Single-cable crimping 1 x Double-cable crimping	3,5	7800711	500
	glava ravna ili glava 90° sa bajonetom 16S Straight cone or angle cone with bayonet 16S		5,5	7800704	500
brtva sa 3 otvora 3-hole sealing 	glava ravna ili glava 90° sa navojem M 27 x 1 Straight cone or angle cone with thread M 27 x 1	3 x jednostruko upleten kabel 3 x Single-cable crimping	3,5	7800673	500
	glava ravna ili glava 90° sa bajonetom 16S Straight cone or angle cone with bayonet 16S		5,5	7800622	500
brtva sa 4 otvora 4-hole sealing 	glava ravna ili glava 90° sa navojem M 27 x 1 Straight cone or angle cone with thread M 27 x 1	4 x jednostruko upleten kabel 4 x Single-cable crimping	3,5	7800681	500
	glava ravna ili glava 90° sa bajonetom 16S Straight cone or angle cone with bayonet 16S		5,5	7800615	500
brtva sa 4 otvora 4-hole sealing 	glava ravna ili glava 90° sa bajonetom 16S Straight cone or angle cone with bayonet 16S	1 x jednostruko upleten kabel 3 x dvostruko upleten kabel 1 x Single-cable crimping 3 x Double-cable crimping	5,5	7800738	500


ADR-GGVS pribor


ADR-GGVS Accessories

	stranica		page
Tijelo uvodnice	52	Screw-in-Sockets	52
Prijelazni komad za utikač i T-uvodnicu	53	Transition Pieces for Plugs and T-Glands	53
Luk 90°	53	90°-Angles	53
Prijelaz	54	Adaptors	54
Zaštitna kapa i pričvrsna matica	55	Cap Nuts	55
Zaporni prsten	56	Locking Rings	56
Redukcija	56	Reducers	56
Matica	57	Locknuts	57
Brtva plosnata	57	Flat Sealings	57
Uložak za brtvljenje	58	Sealing Insert	58
Brtva za kabel	58	Sealing Buffers	58
Brtva za pojedinačne vodiče	59	Single Wire Sealings	59
Brtveni prsten	59	Clamp Sealings	59
Brtvena ploča	60	Sealing Plates	60
Pritisna ploča	61	Pressure Plates	61
Ploča za centriranje	62	Center Plates	62
Obujmice za zaštitu vodiča	63	Secondary Lockings	63
Zaštitne kape	64	Dust Caps	64

Tijelo uvodnice

Screw-in-Sockets





Materijal:
Poliamid

Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
• siva

Material:
Polyamide


Temperature range:
-40°C to 120°C


Colour(s)/Designs:
• grey

d d	SW SW	e e	h h	a a	b b	i i	k d	g g	f f	broj artikla Art. no	JP kom. PU pcs.
PG 11	22,0	14,0	11,0	28,5	15,0	8,0	8,0	24,5	PG 9	9801308	1000
PG 11	18,3	13,7	11,0	30,0	17,0	8,0	8,0	21,5	PG 9	9800751	1500
PG 11	19,0	14,0	14,0	30,0	17,0	8,0	8,0	24,5	PG 11	9801340	1000
PG 11	22,0	13,7	11,0	33,0	16,0	8,0	12,0	24,5	PG 9	9801260	100
PG 21,8 x 1,41	21,5	17,0	14,0	28,0	16,9	6,0	8,0	24,7	PG 11	9800972	100
PG 21,8 x 1,41	22,0	17,0	14,0	31,0	16,2	6,0	12,4	24,7	PG 11	9801278	1000
PG 26,2 x 1,41	24,0	21,0	21,0	41,0	15,0	9,5	17,0	36,0	3/4"	9801065	500
PG 26,2 x 1,41	27,0	21,5	17,0	27,5	16,5	6,0	8,0	30,0	PG 16	9800778	na upit / on request
PG 26,2 x 1,41	27,0	21,5	17,0	32,0	17,8	5,2	12,0	30,0	PG 16	9801859	1000
PG 26,2 x 1,41	32,0	21,0	26,0	41,5	15,2	9,8	17,5	42,0	1"	9801073	500
M 35 x 1,75	40,0	26,5	23,0	37,0	24,5	9,0	10,0	46,0	PG 21	9800921	na upit / on request
M 35 x 1,75	36,0	26,5	25,0	41,0	24,5	9,0	14,1	41,5	PG 21	9800867	500
M 35,8 x 1,75	36,0	29,0	23,0	36,5	23,5	9,0	10,0	41,5	PG 21	9801243	na upit / on request
M 42 x 2,0	45,0	35,0	30,0	36,5	23,5	9,0	10,0	51,5	PG 29	9801189	200
M 42 x 2,0	45,0	34,5	29,5	40,5	23,5	9,0	14,0	51,5	PG 29	9801286	500

Tijelo uvodnice PG 11

Screw-in-Socket PG 11





Materijal:
mesing niklani

Radna temperatura:
-40°C do 120°C

Upotreba:
• 2 x PG 11 za spajanje rebrastih cijevi NW10 ili za pričvršćivanje direktno na stražnja svjetla itd.

Material:
brass, nickel plated


Temperature range:
-40°C to 120°C

Applications:
• 2 x PG 11 for connection of corrugated tubes NW 10 or to screw in rear lamps etc.

broj artikla Art. no.	JP kom. PU pcs.
9800930	50

Prijelazni komad
za utikač i T-uvodnicu

Transition Pieces
for Plugs and T-Glands



Materijal:
Poliamid 6/66
Polikarbonat


Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
• crna, siva, žuta, zelena
siva boja: artikl se razlikuje od prikazanog na slici

Material:
Polyamide 6/66
Polycarbonate

Temperature range:
-40°C to 120°C

Colour(s)/Designs:
• black, grey, yellow, green
Colour grey: Article differs from picture



l l	A A	Ø a Ø a	Ø b Ø b	Ø c Ø c	d d	e e	f f	materijal Material	boja Colour	broj artikla Art. no.	JP kom PU pcs.
M 35 x 1,75	PG 26,2 x 1,41	16,0	41,0	22,0	17,0	13,0	34,0	PA6	žuta/yellow	9801079	1000
M 35 x 1,75	PG 26,2 x 1,41	16,0	41,0	22,0	17,0	13,0	34,0	PA6	zelena/green	9801080	1000
M 35 x 1,75	PG 26,2 x 1,41	16,0	41,0	22,0	17,0	13,0	34,0	PA6	crna/black	9801081	1000
M 35 x 1,75	PG 26,2 x 1,41	22,0	41,0	22,0	17,0	13,0	34,0	PA6	crna/black	9801082	1000
PG 11	PG 21,8 x 1,41	14,0	24,0	17,0	13,0	15,0	30,0	PA6	crna/black	9801120	1000
PG 11	PG 21,8 x 1,41	12,0	24,0	17,0	13,0	15,0	30,0	PA6	crna/black	9801121	1000
PG 21,8 x 1,41	PG 11	11,0	26,0	13,0	13,0	13,0	30,5	PC	siva/grey	9801122	1000
PG 26,2 x 1,41	PG 11	10,3	33,7	14,3	13,0	13,5	30,3	PA6	siva/grey	9801090	500
PG 26,2 x 1,41	M 35 x 1,75	22,1	35,8	26,0	12,5	17,0	31,9	PA6	siva/grey	9801162	500
PG 26,2 x 1,41	PG 21,8 x 1,41	13,8	35,2	17,0	13,1	13,3	30,4	PA6	siva/grey	9801103	500
5/8" - 24 UNEF-2B	PG 11	10,0	24,3	14,1	7,8	13,0	26,3	PA6	siva/grey	9801006	500
3/4" - 20 UNEF-2B	PG 11	10,0	27,0	14,0	8,5	13,0	26,2	PA6	crna/black	9801111	1000
7/8" - 20 UNEF-2B	PG 11	10,2	31,5	14,0	8,5	13,0	26,6	PA6	siva/grey	9801022	500
15/16" - 20 UNEF-2B	PG 26,2 x 1,41	21,5	30,0	21,5	10,0	13,0	25,0	PA66	crna/black	9801029	100
15/16" - 20 UNEF-2B	PG 21,8 x 1,41	17,0	30,0	17,0	10,0	13,0	25,0	PA66	crna/black	9801028	100
1" - 20 UNEF-2B	PG 26,2 x 1,41	16,0	34,8	22,0	8,5	13,0	27,0	PA6	siva/grey	9801030	500
1" - 20 UNEF-2B	PG 11	10,5	34,4	14,0	12,0	13,0	29,8	PA6	siva/grey	9801014	500
1 3/16" - 18 UNEF-2B	PG 11	10,0	37,7	14,0	9,0	13,5	26,5	PA6	siva/grey	9801170	500
1 3/16" - 18 UNEF-2B	PG 26,2 x 1,41	16,0	37,0	22,0	8,5	13,0	26,5	PA6	siva/grey	9801049	500
1 3/8" - 18 UNEF-2B	PG 26,2 x 1,41	16,0	41,0	22,0	17,0	13,0	34,0	PA6	crna/black	9801083	1000
1 7/16" - 18 UNEF-2B	M 35 x 1,75	22,7	43,7	26,0	8,6	15,9	29,9	PA6	siva/grey	9801057	500

5.3

Luk 90°
za 21-/35-/37-polne konektore

90°-Angles
for 21-/35-/37-pole Connectors



IP 67

Materijal:
Poliamid 6

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• crna

Material:
Polyamide 6

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black

opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
luk 90° M35 sa zaštitnom kapom M42 za prijelaz 34 za 21-, 35- i 37-polne konektore	**90°-angle M35 with cap nut M42 for adaptor 34** for 21-, 35- and 37-pole connectors	crna black	7807406	50
luk 90° M35 sa zaštitnom kapom M42 kurz za prijelaz 34 za 21-, 35- i 37-polne konektore	**90°-angle M35 with cap nut M42 short for adaptor 34** for 21-, 35- and 37-pole connectors	crna black	7807408	50

Prijelaz

Adaptors

IP 67

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• crna

Material:
Polyamide 66
30 % glassfibre reinforced

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black



opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
prijelaz 16-pol. **za ne-SEAL konektore** odgovara za rebrastu cijev NW 22	**Adaptor 16-pole** **for non SEAL connectors** suitable for corrugated tube NW 22	crna black	7807163	50



prijelaz 21-/35-/37-pol. **za utikač i priključnicu**	**Adaptor 21-/35-/37-pole** **for plug and socket**	crna black		
prijelaz 21 NW 17	Adaptor 21 NW 17		7807259	50
prijelaz 26 NW 22	Adaptor 26 NW 22		7807260	50
prijelaz 34 NW 29	Adaptor 34 NW 29		7807341	50

Zaštitna kapa PG 11

Cap Nuts PG 11



Materijal:
Poliamid

Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
- siva
- zatvorena


Upotreba:
- za zatvaranje uvodnica (npr. za zaštitu od prašine)

Material:
Polyamide

Temperature range:
-40°C to 120°C

Colour(s)/Designs:
- grey
- closed

Applications:
- to close cable glands, (e.g. dust protection)



a a	b b	c c	d d	e e	broj artikla Art. no.	JP kom. PU pcs.
zatvorena/closed	22,0	14,0	PG 11	25,0	9800891	1

5.3

Pričvrsna matica

Cap Nuts



Materijal:
Poliamid

Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
- siva


Pribor (vidi poglavlje 5.3) :
- zaporni prsten

Material:
Polyamide

Temperature range:
-40°C to 120°C

Colour(s)/Designs:
- grey


Accessories (see chapter 5.3):
- Locking ring



za NW standardni profil for NW normal profile	a a	b b	c c	d d	broj artikla Art. no.	JP kom. PU pcs.
8,5	11,5	PG 11	24,5	15,5	9801324	1000
10	13,5	PG 11	24,5	18,0	9800689	2000
13	17,0	PG 21,8 x 1,41	27,0	16,0	9800956	1000
17	21,5	PG 26,2 x 1,41	32,0	18,5	9800697	1000
22	26,5	M 35 x 1,75	41,5	21,5	9800905	700
23	28,5	M 35,8 x 1,75	41,0	21,0	9801251	50
29	34,5	M 42 x 2,00	47,0	21,5	9801138	350

Zaporni prsten

Locking Rings



Materijal:
Poliamid

Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
• siva


Upotreba:
• za pričvrsnu maticu
(vidi poglavlje 5.3)

Material:
Polyamide

Temperature range:
-40°C to 120°C

Colour(s)/Designs:
• grey

Applications:
• for cap nuts
(see chapter 5.3)



a a	b b	c c	d d	e e	f f	broj artikla Art. no.	JP kom. PU pcs.
24,0	19,3	11,0	7,0	6,0	2,0	8118094	5000
27,0	22,0	9,0	5,0	4,0	2,0	8118132	5000
32,0	27,0	9,0	5,0	4,0	2,0	8118175	1000
42,0	36,0	12,0	8,0	7,0	2,0	8118221	1500

Redukcija

Reducers



Materijal:
Polikarbonat


Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
• siva

Material:
Polycarbonate

Temperature range:
-40°C to 120°C

Colour(s)/Designs:
• grey



Ø A Ø A	Pg (A) Pg (A)	Ø B Ø B	Pg (B) Pg (B)	SW SW	C C	D D	broj artikla Art. no.	JP kom. PU pcs.
24,0	7	7,5	11	22,0	8,0	13,0	7005016	50
26,5	7	7,5	13,5	24,0	9,0	14,0	7005024	50
26,5	9	9,3	13,5	24,0	9,0	12,0	7005032	50
29,75	9	9,1	16	27,0	9,0	14,0	7005040	50
29,75	11	11,1	16	27,0	9,0	14,0	7005059	50
35,0	11	11,1	21	32,0	11,0	16,0	7005067	25
35,0	13,5	13,1	21	32,0	11,0	16,0	7005075	25
35,0	16	15,7	21	32,0	11,0	16,0	7005202	25
45,0	13,5	14,2	29	41,0	12,0	18,5	7005083	25
45,0	16	17,0	29	41,0	12,0	18,5	7005091	25
45,0	21	20,0	29	41,0	12,0	18,0	7005210	25

Matice

Locknuts



Materijal:
Polikarbonat


Radna temperatura:
-40°C do 120°C

Boje/izvedbe:
• siva

Material:
Polycarbonate

Temperature range:
-40°C to 120°C

Colour(s)/Designs:
• grey



SW SW	navoj Thread	m m	D D	broj artikla Art. no.	JP kom. PU pcs.
15,0	PG 7	4,5	16,5	7001070	50
19,0	PG 9	4,5	21,0	7001096	50
22,0	PG 11	5,0	24,0	7001118	50
24,0	PG 13,5	5,5	26,0	7001134	50
27,0	PG 16	6,0	30,0	7001169	50
32,0	PG 21	6,5	35,0	7001215	20
41,0	PG 29	7,5	44,0	7001290	20
55,0	PG 36	8,5	59,0	7001363	10
65,0	PG 42	9,0	71,0	7001428	5
70,0	PG 48	9,5	76,0	7001487	5

5.3

Brtva plosnata

Flat Sealings



Materijal:
Perbunan/Neopren


Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
• crna

Material:
Perbunan/Neoprene


Temperature range:
-25°C to 80°C

Colour(s)/Designs:
• black



D D	d d	s s	materijal Material	broj artikla Art. no.	JP kom. PU pcs.
17,0	10,0	1,0	Perbunan	8113352	1000
17,0	12,0	2,0	Perbunan	8113416	1000
20,0	13,0	1,0	Perbunan	8113017	1000
21,0	10,0	2,0	Perbunan	8113092	po potrebi/loose
24,0	16,0	2,0	Perbunan	8113084	1000
24,0	18,0	1,0	Perbunan	9805281	1000
25,0	21,0	2,2	Neopren/Neoprene	8113424	po potrebi/loose
25,5	16,0	3,0	Perbunan	8113327	po potrebi/loose
28,0	21,0	1,0	Perbunan	8113025	1000
28,0	21,0	2,0	Perbunan	8113041	1000
34,0	16,0	2,0	Perbunan	8113319	1000
35,0	25,0	2,0	Perbunan	8113050	1000
40,0	26,0	2,0	Perbunan	8113068	1000
42,0	33,0	2,0	Neopren/Neoprene	8113010	po potrebi/loose

Uložak za brtvljenje Sealing Insert

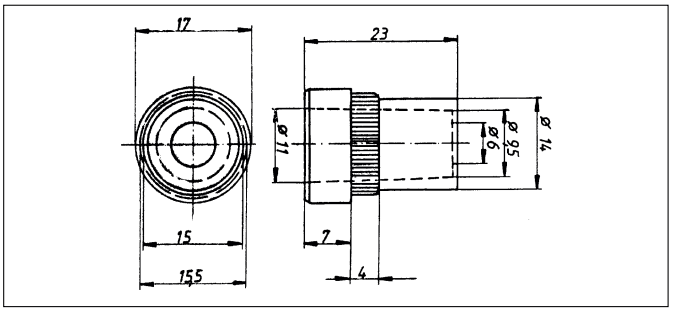

Materijal:
meki-PVC (polivinilklorid)

Radna temperatura:
-20°C do 60°C

Boje/izvedbe:
• zelena

Upotreba:
• za utično/natično kućište PG 11
• za glavu ravnu/glavu 90° PG 11
• za priključnu kutiju rezervoara (vidi poglavlje 5.4)

Material:
Soft-PVC (Polyvinylchloride)

Temperature range:
-20°C to 60°C


Colour(s)/Designs:
• green

Applications:
• for pin/jack housing PG 11
• for straight/angle cone PG 11
• for fuel junction box (see chapter 5.4)

Ø mm Ø mm	boja Colour	odgovara za/suitable for 3-/5-polno utično/natično kućište sa vanjskim navojem PG 11 3-/5-pole pin/jack housing with external thread PG 11	priključnu kutiju rezervoara fuel junction box	glavu ravnu/glavu 90° sa vanjskim navojem PG 11 Straight/angle cone with external thread PG 11	broj artikla Art. no.	JP kom. PU pcs.
7-10,5	zelena/green	✔	✔	✔	8115605	100

5.3

Brtva za kabel Sealing Buffers

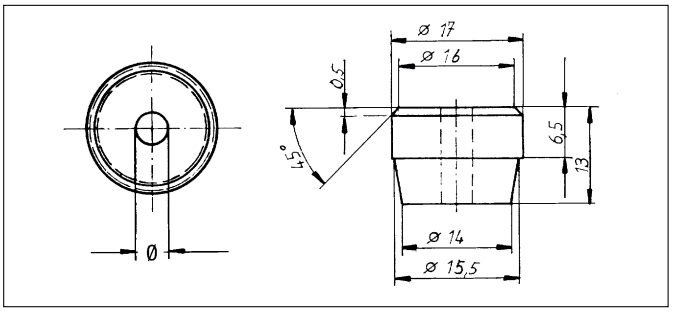

Materijal:
Neopren

Radna temperatura:
-25°C do 80°C

Boje/izvedbe:
• crna

Upotreba:
• za utično/natično kućište PG 11
• za glavu ravnu/glavu 90° PG 11

Material:
Neoprene

Temperature range:
-25°C to 80°C


Colour(s)/Designs:
• black

Applications:
• for pin/jack housing PG 11
• for straight/angle cone PG 11

promjer otvora Ø mm drill hole Ø mm	boja Colour	odgovara za/suitable for 3-/5-polno utično/natično kućište sa vanjskim navojem PG 11 3-/5-pole pin/jack housing with external thread PG 11	glavu ravnu/glavu 90° sa vanjskim navojem PG 11 Straight/angle cone with external thread PG 11	broj artikla Art. no.	JP kom. PU pcs.
4,5	crna/black	✔	✔	8115516	500
5,6	crna/black	✔	✔	8115508	500

Brtva za pojedinačne vodiče

Single Wire Sealings

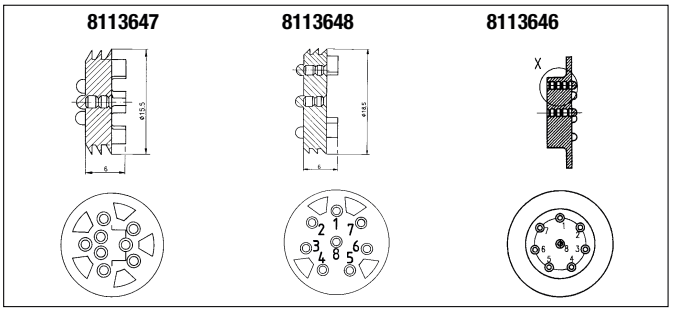

Materijal:
Neopren (CR)
Silikon (Sil)

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
- crna, crveno-smeđa
- 8 mogućih otvora

Material:
Neoprene (CR)
Silicone (Sil)

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
- black, red-brown
- 8-holes with tear off nipples

Ø mm	boja	odgovara za/suitable for: 3-/5-polno utično/natično kućište sa vanjskim navojem PG 11	8-polno utično kućište	glavu ravnU/ glavu 90° sa vanjskim navojem PG 11	glavu ravnu/glavu 90° sa bajonetom 16S (broj artikla 9800611/9800603) u kombinaciji sa 8-pol. natičnim kućištem (broj artikla 7805098/7805080)	broj artikla	JP kom.
Ø mm	Colour	3-/5-pole pin/jack housing with external thread PG 11	8-pole pin housing	Straight/angle cone with external thread PG 11	Straight/angle cone with bayonet 16S (Art. no. 9800611/9800603) in combination with 8-pol. jack housing (Art. no. 7805098/7805080)	Art. no.	PU pcs.
15,5	crna/black (CR)	✔		✔	✔	8113647	50
18,5	crna/black (CR)		✔			8113648	50
27,0	crv.-smeđa/red-brown (Sil)				✔	8113646	50

5.3

Brtveni prsten

Clamp Sealings



Materijal:
Neopren


Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
- crna

Material:
Neoprene

Temperature range:
-40°C to 105°C

Colour(s)/Design:
- black



za NW standardni profil / for NW normal profile	a / a	b / b	c / c	broj artikla / Art. no.	JP kom. / PU pcs.
8,5	17,5	11,5	5,0	8117080	1000
10	17,0	12,8	6,38	8117101	1000
13	20,0	15,8	5,38	8117136	1000
17	24,5	20,5	6,64	8117179	1000
22	33,0	25,2	7,0	8117225	500
23	33,0	28,1	7,0	8117233	500
29	39,0	34,3	7,54	8117292	500

Brtvena ploča
za ne-SEAL konektore (nebrtvljeni kontakt)

Sealing Plates
for non SEAL conncectors

IP 67

Materijal:
Silikon

Radna temperatura:
-40°C do 125°C

Boje/izvedbe:
• prozirna

Svojstva:
• za ne-SEAL konektore

Material:
Silicone 30 shore

Temperature range:
-40°C to 125°C

Colour(s)/Designs:
• transparent

Features:
• for non-SEAL connectors

	opis Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
	**za 16-pol. utikač i priključnicu** koristi se sa: pritisnom pločom 7810394 i prijelazom 7807163 **for 16-pole plug and socket** useable with: pressure plate 7810394 and adaptor 7807163	prozirna transparent	7810164	50
	**za 21-pol. utikač i priključnicu** koristi se sa: pritisnom pločom 7810393 i prijelazom: 7807259 NW 17 7807260 NW 22 7807341 NW 29 **for 21-pole plug and socket** useable with: pressure plate 7810393 and adaptor: 7807259 NW 17 7807260 NW 22 7807341 NW 29	prozirna transparent	7810210	50
	**za 37-pol. utikač i priključnicu** koristi se sa: pritisnom pločom 7810385 i prijelazom: 7807259 NW 17 7807260 NW 22 7807341 NW 29 **for 37-pole plug and socket** useable with: pressure plate 7810385 and adaptor: 7807259 NW 17 7807260 NW 22 7807341 NW 29	prozirna transparent	7810377	50

Pritisna ploča
za ne-SEAL konektore (nebrtvljeni kontakt)

Pressure Plates
for non SEAL conncectors

IP 67

Materijal:
Poliamid 6

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• crna


Svojstva:
• za "nije SEAL" konektore

Material:
Polyamide 6


Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black

Features:
• for non-SEAL connectors



opis	Description	boja / Colour	broj artikla / Art. no.	JP kom. / PU pcs.
za 16-pol. utikač i priključnicu koristi se sa: brtvenom pločom 7810164 i prijelazom 7807163	**for 16-pole plug and socket** useable with: sealing plate 7810164 and adaptor 7807163	crna black	7810394	50



za 21-pol. utikač i priključnicu koristi se sa: brtvenom pločom 7810210 i prijelazom: 7807259 NW 17 7807260 NW 22 7807341 NW 29	**for 21-pole plug and socket** useable with: sealing plate 7810210 and adaptor: 7807259 NW 17 7807260 NW 22 7807341 NW 29	crna black	7810393	50



za 37-pol. utikač i priključnicu koristi se sa: brtvenom pločom 7810377 i prijelazom: 7807259 NW 17 7807260 NW 22 7807341 NW 29	**for 37-pole plug and socket** useable with: sealing plate 7810377 and adaptor: 7807259 NW 17 7807260 NW 22 7807341 NW 29	crna black	7810385	50

Ploča za centriranje

Center Plates

IP 67

Materijal:
Polikarbonat





Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• prozirna

Material:
Polycarbonate

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• transparent


	opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
	**ploča za centriranje 16-pol. za utične kontakte**	**Center plate 16-pole for pin contacts**	prozirna transparent	7810400	50
	**ploča za centriranje 21-pol. za utične kontakte**	**Center plate 21-pole for pin contacts**	prozirna transparent	7810401	50
	**ploča za centriranje 35-pol. za utične kontakte**	**Center plate 35-pole for pin contacts**	prozirna transparent	7810403	50
	**ploča za centriranje 37-pol. za utične kontakte**	**Center plate 37-pole for pin contacts**	prozirna transparent	7810402	50

Obujmica za zaštitu vodiča

za 4-/5-/8-/35-polne SEAL-konektore

Secondary Lockings

for 4-/5-/8-/35-pole SEAL-Connectors

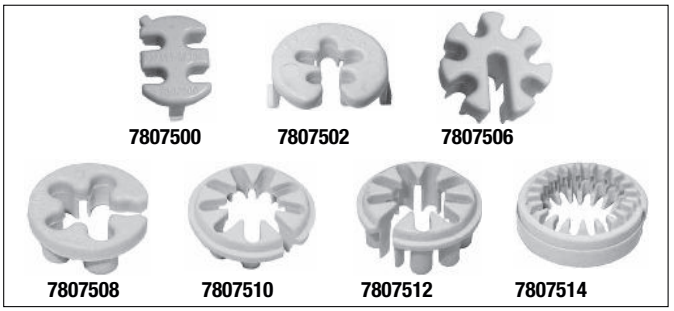

IP 67

Materijal:
Poliamid 66
30 % ojačan staklenim vlaknima

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• žuta

Upotreba:
• posebno preporučljivi za glave 90° za zaštitu od deformiranja kablova

Material:
Polyamide 66
30 % glassfibre reinforced

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• yellow

Applications:
• particulary recommended for angle cones to prevent cables from kinking

opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
4-polne za natične kontakte	4-pole for jack contacts	žuta/ yellow	7807500	3000
5-polne za utične/natične kontakte	5-pole for pin/jack contacts	žuta/ yellow	7807502	3000
8-polne za natične kontakte	8-pole for jack contacts	žuta/ yellow	7807506	3000
35-polni unutrašnji prsten za utične/natične kontakte	35-pole inner ring for pin/jack contacts	žuta/ yellow	7807508	1000
35-polni međuprsten za natične kontakte	35-pole center ring for jack contacts	žuta/ yellow	7807510	1000
35-polni međuprsten za utične kontakte	35-pole center ring for pin contacts	žuta/ yellow	7807512	1000
35-polni vanjski prsten za utične/natične kontakte	35-pole cxternal ring for pin/jack contacts	žuta/ yellow	7807514	1000

Zaštitna kapa
za 21-/35-/37-polni utikač

Dust Cap
for 21-/35-/37-pole Plug



IP 67

Materijal:
Poliamid 6

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• crna

Material:
Polyamide 6

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black

opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
zaštitna kapa za 21-/35-/37-pol. utikač	**Dust Cap** for 21-/35-/37-pol. Plug	crna black	7807377	50

5.3

Zaštitna kapa komplet
za 21-/35-/37-polne priključnice

Dust Cap complete
for 21-/35-/37-pole Socket



IP 67

Materijal:
Poliamid 66
EPDM

Radna temperatura:
-40°C do 105°C

Boje/izvedbe:
• crna

Material:
Polyamide 66
EPDM

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black

opis	Description	boja Colour	broj artikla Art. no.	JP kom. PU pcs.
zaštitna kapa komplet za 21-/35-/37-pol. priključnice sastoji se od: • zaštitne kape • pričvrsne trake • plosnate brtve 38 x 41,6 x 3,8	**Dust-Cap complete** for 21-/35-/37-pol. socket consisting of: • Dust Cap • Mounting strip • Flat sealing 38 x 41,6 x 3,8	crna black	7800342	50

	Stranica		page
Oznake	3	**Legend**	3
Opaske, modifikacije i jamstva	3	**Remarks, modifications and warranty**	3
Upute za skladištenje proizvoda od brizganog poliamida	3	**Storing Instructions for Polyamide Injection molding parts**	3
Zaštitni znakovi	4	**Trademarks**	4
RoHS/ElektroG/WEEE	5	**RoHS/ElektroG/WEEE**	5
REACH - novo europsko zakonodavstvo za kemikalije	6	**REACH – The new European chemical legislation**	6
Sustavi zaštite (IP) prema EN 60529	7	**Modes of Protection (IP) according to EN 60529**	7
Kemijska otpornost plastičnih materijala	8 - 11	**Chemical resistance of plastic materials**	8 - 11
Tablice za pretvorbu		**Conversion Charts**	
Mjere	12	Measures	12
Rebraste cijevi (inči/coli - milimetri - NW)	12	Corrugated tubes (Inches - mm - NW)	12
milimetri u inče/cole	12	mm to inches	12
Normalni profil - AHW	12	Normal Profile - Automotive High Wave	12
Inči/coli u milimetre	13	Inches - mm	13
Tablica navoja	14	**Thread chart**	14

Oznake

JP	jedinica pakiranja
kom.	komad
	kontejner
	kolut
	razrezano
	nerazrezano
	perforirano

Legend

PU	package unit
pcs.	piece
	Container
	Coils (Rings)
	slit
	unslit
	perforated

Opaske, modifikacije i jamstva

Gore navedene informacije kao i svi pismeni ili usmeni savjeti u vezi primjene tehnologija pružaju se u skladu s našim najboljim saznanjima. Prema tome, svaki takav savjet ili informacija je potpuno neobvezujući, posebno u odnosu na prava industrijskog vlasništva trećih strana.

Naše savjetodavne usluge ne isključuju odgovornost primatelja da samostalno razmotri savjet i njegovu prikladnost u odnosu na namjeravanu primjenu i svrhu.

Svaki zahtjev temeljen na uvjetima rada i različitim uvjetima primjene koji su izvan naše sfere utjecaja je isključen. Ukoliko se naši proizvodi primijenjuju ili obrađuju i naš savjet koristi u proizvodima proizvedenima od strane korisnika, smatrati će se da je takav slučaj izvan naše kontrole i u skladu s tim izvan naše sfere odgovornosti.

Ukoliko bi naša odgovornost bila dovedena u pitanje unatoč navedenoj napomeni, odšteta će biti ograničena na vrijednost robe isporučene od naše strane i korištene od strane korisnika.

Naše jamstvo se oslanja i u skladu je sa standardom kvalitete naših proizvoda, u skladu s našim specifikacijama i našim Općim odredbama i uvjetima prodaje, isporuke i plaćanja.

Bilo koje jamstvo funkcije proizvoda je uvjetovano pravilnim korištenjem i tretmanom proizvoda, a osobito pridržavanjem propisanih steznih raspona, kabelskih promjera, zateznih momenata i nivoa zaštite

Prikladnost proizvoda za namjenu i ugradnju kod korisnika, u skladu s uvjetima primjene, trajanjem korištenja i opterećenja, mora biti provjerena i zajamčena od strane korisnika pod radnim uvjetima o kojima je riječ i mora biti u skladu s postojećom električnom instalacijom i sigurnosnim propisima.

Zadržavamo pravo na pogreške i tehničke promjene.

Registar sa šiframa artikla služi kao brzi orjentacijski vodič. Odstupanja se odnose na tiskarske pogreške. Ukoliko niste sigurni da su podaci točni, molimo vas postavite upit.

Ova dokumentacija može se reproducirati ili umnažati isključivo elektronskim putem te s našim pristankom.

Vjerodostojna je isključivo najnovija revizija kataloga.

Remarks, modifications and warranty

The above information and any written or verbal application engineering-related advice are provided to the best of our knowledge. However any such advice or information is totally non-binding and without commitment, also in respect of any third-party industrial property rights.

Our advisory service does not exonerate the recipient from itself reviewing the advice provided for its suitability in respect of the intended application and purpose.

Any claim based on work conditions and different application conditions outside our sphere of influence is excluded. Should our products be applied or processed and our advice utilized in products manufactured by you, this shall be deemed to take place beyond our control and accordingly outside our sphere of responsibility.
Should our liability be called into question despite this disclaimer, however, any damages shall be limited to the value of goods supplied by us and utilized by you.

Our warranty relates to a consistent standard of quality in our products in accordance with our specifications and our General Terms and Conditions of Sales, Delivery and Payment.
Any warranty of product function is conditional upon correct handling and treatment of the products, in particular upon correct observance of clamping ranges, cable diameters, tightening torques and protection ratings.

The suitability of the product for the purpose and application of the user in respect of application conditions, duration of use and load capacity must be reviewed and guaranteed by the user under the practical conditions in question, and must be in compliance with currently valid electrical installation and safety regulations.

Subject to error and to technical modifications.

The registry with the order numbers is mainly to serve as a quick orientation guide. Deviations are related to printing errors. In any case please inquire for the exact details.

This documentation may only be reproduced or duplicated using any electronic means with our consent.

The latest valid revision of the catalogue only is authoritative.

Upute za skladištenje proizvoda od brizganog poliamida

– tijekom razdoblja skladištenja od jednog do tri mjeseca, moguće je upijanje vode/vlage do 2,5% težine dijelova izrađenih od poliamida
– preporučujiemo temeraturu skladištenja od 15° do 25° C uz vlažnost zraka od 55 % do 75 %.
– proizvodi od poliamida moraju biti pohranjeni u zavarenm vrećama
– uskladišteni pojedinačni proizvodi, odnosno jedinice pakiranja ne smiju biti izložene atmosferskim uvjetima.
– djelomično vađenje proizvoda iz vreće mora se izvršiti neposredno prije daljnje upotrebe.
– vreća mora biti ponovno zatvorena odmah nakon što se izvadi proizvod.

Storing Instructions for Polyamide Injection molding parts

– Polyamide conditions during a period of 1 to 3 month, that, means a possible Water-/humidity absorption up to 2,5 % of the part weight.
– We recommend a storing temperature of 15° C to 25° C at an atmospheric humidity of 55 % to 75 %.
– Polyamide articles should be stored in welded bags.
– When stored, parts/packaging units may not be exposed to weather.
– Partial withdrawals from the bag should be carried out just before further processing.
– The bag must be closed straight after the parts withdrawal.

Zaštitni znakovi

Mnogi naši proizvodi su testirani i odobreni od strane slijedećih organizacija za certifikaciju:

Proizvodi sa UL oznakom i certifikatom osiguravaju pristup najvećim svjetskim tržištima. Tako označeni proizvodi garantiraju maksimum kvalitete i samosvojnosti. U Sjevernoj Americi UL znak se prepoznaje kao najvažniji znak kvalitete za sigurnost. Znak je također vrlo proširen i u Južnoj Americi, Europi, na Bliskom istoku, u Africi te u Azijsko-Pacifičkoj regiji i Australiji.

Proizvodi s ovom vrstom oznake ocijenjeni su u skladu sa kanadskim sigurnosnim zahtjevima.

Proizvodi sa "Oznakom Prepoznatljive Komponente" testirani su u skladu sa UL standardom. Ovaj znak koristimo za sastavne dijelove koji su dio složenijeg proizvoda ili sustava. Ova testna oznaka je vjerojatno najšire prihvaćen oblik certificiranja od strane kupaca, regulatornih tijela i osiguravateljskih društava u SAD i Kanadi.

VDE oznaka pokazuje sukladnost s VDE normama ili europskim ili međunarodno usklađenim standardima i potvrđuje usklađenost sa zaštitnim zahtjevima važećih direktiva Europske Komisije.VDE oznaka je simbol koji se odnosi na električne, mehaničke, toplinske, otrovne, radiološke i druge opasnosti.

Proizvodi koji su označeni s oznakom CSA certifikacije, provjereni su i ovjereni da zadovoljavaju postojeće standarde za sigurnost i izvedbu. Ti standardi uključuju standarde propisane od strane UL (Underwriters Laboratories), ANSI (American National Standards Institute) i NSF (National Sanitation Foundation).

GL	**Germanischer Lloyd** pomorska klasifikacija.
	DET NORSKE VERITAS pomorska klasifikacija
	Ex znak je specifična oznaka opreme zaštićene od eksplozije. Koristi se kako bi pokazala da su oprema, zaštitni sustavi ili komponente u skladu sa zahtjevima europskih normi koje su usklađene sa Direktivom 94/9/EZ (ATEX Direktive, nazvana po francuskom „ATmosphere EXplosible“).
	ADR: Europski sporazum koji se odnosi na internacionalni cestovni prijevoz opasnih tereta **GGVS:** Njemački tehnički pravilnik o cestovnom prijevozu opasnih tereta
NF F16-101	NF F16-101 je ispitivanje prema Pravilniku francuskih željeznica o materijalima za izradu željezničkih vozila.
NFR 13-903	Certifikacija prema francuskom standardu NFR 13-903.
DIN 54837	Ispitivanje materijala, malih sastavnih dijelova i dijelova za željeznička vozila - određivanje ponašanja pri gorenju uporabom plinskog plamenika.
	CE oznaka (također poznata kao CE znak) je obvezna na mnogim proizvodima plasiranim na jedinstvenom tržištu u Europskom gospodarskom prostoru (EEA).CE oznaka potvrđuje da je proizvod zadovoljio EU-zahtjeve vezane na sigurnost potrošača, zdravlje ili ekologiju.

Trademarks

Many of our products have been tested and authorized by the following approval organisations:

Products with UL test marks and certifications support access to the world's major sales markets. Such marked products guarantees maximum quality and integrity, and throughout North America the UL Mark is recognized as the number one quality mark for safety. As well in South America, Europe, the Middle East, Africa, the Asia-Pacific region and Australia this mark is very widespread.

The products with this type of mark have been evaluated to Canadian safety requirements.

Products with the „Recognized Component Mark“ have been tested by UL. We use this mark for component parts that are part of a larger product or system. This test mark is probably the most widely accepted form of certification amongst consumers, regulatory authorities and insurance companies in the USA and Canada.

The VDE Mark indicates conformity with the VDE standards or European or internationally harmonized standards resp. and confirms compliance with protective requirements of the applicable EC Directive(s). The VDE Mark is a symbol for electrical, mechanical, thermal, toxic, radiological and other hazards.

Products bearing the CSA Certification Mark have been tested and certified to meet applicable standards for safety or performance. These standards include those of UL (Underwriters Laboratories), ANSI (American National Standards Institute) and NSF (National Sanitation Foundation).

The **Germanischer Lloyd AG** is a marine classification society.	
DET NORSKE VERITAS Marine classification	
The Ex mark is a specific marking for explosive protection equipment. It is used to show that equipment, protective systems or components comply with the requirements of the European standards that are harmonised with the 94/9/EC Directive (ATEX Directive, named after the French „ATmosphere EXplosible“).	
ADR: European agreement concerning the international carriage of dangerous goods by road **GGVS:** German technical rules for dangerous goods-regulation road	
The NF F16-101 is a test according to French rule in building materials Railway (SNCF).	
Certification according to French standard NFR 13-903.	
Testing of materials, small components and component sections for rail vehicles - Determination of burning behaviour using a gas burner.	
The CE marking (also known as **CE mark**) is a mandatory on many products placed on the single market in the European Economic Area (EEA). The **CE marking** certifies that a product has met EU consumer safety, health or environmental requirements.	

RoHS/ElektroG/WEEE

RoHS

Proizvodi koji nose ovu oznaku u skladu su sa EU Direktivom 2002/95/EC koja zabranjuje uporabu određenih tvari u proizvodnji ili preradi elektro i elektroničke opreme i komponenti. Cilj Schlemmera je isključiti korištenje posebno problematičnih materijala kod spomenutih proizvoda. Između ostalog, to se odnosi na bezolovno lemljenje elektroničkih komponenti, povlačenje iz upotrebe otrovnih usporivača plamena u proizvodnji kabela i uređaja za zaštitu kabela, te uvođenje odgovarajućih zamjenskih proizvoda.

Slijedeće tvari ne nalaze se u gore navedenoj opremi u skladu s direktivom:

- olovo
- živa
- kadmij
- šestovalentni krom
- polibromirani bifenil (PBB)
- polibromirani difenil eter (PBDE)

Revidirani dodatak direktive određuje maksimalne koncentracije za materijale sadržane u proizvodu. Dopuštene koncentracije su 0,01% po težini za kadmij i 0,1% po težini za ostalih pet tvari. Mesing i bakrene legure ne smiju sadržavati više od 4 posto olova po težini.

RoHS akronim znači "ograničenje upotrebe određenih opasnih tvari u elektro i elektroničkoj opremi". Prijelazno razdoblje za proizvođače i industrije na koje se odnosi ova direktiva bilo je na snazi do 1. srpnja 2006.

Deklaracija o provedbi Direktive 2002/95/EC (RoHS) od 27.01.2003 i Njemačkog zakona o elektro i elektroničkoj opremi (ElektroG) od 16.03.2005, kao i Direktive 2002/96/EC - o otpadu elektro i elektroničke opreme (WEEE)

Schlemmer proizvodi koji su vam isporučeni ne sadrže - prema našem saznanju - tvari u koncentracijama, pripremi ili primjeni čije stavljanje na tržište je zabranjeno u skladu s trenutno važećim zahtjevima Europske direktive 2002/95/EC (RoHS) od 27.01.2003 i njemačkim Zakonom o elektro i elektroničkoj opremi (ElektroG) od 2005/03/16.

Nadalje, Schlemmer proizvodi također ne sadrži bilo kakav kromirani premaz s heksavalentnim kromom na površini.

Schlemmer proizvodi uglavnom su komponente bez samostalne funkcije i stoga ne podliježu RoHS / WEEE / ElektroG.

Te komponente uključuju kabele i žice, prilagođene kabele i žice; uvodnice, cijevne sustave; priključke i dijelove za njihove završetke, instaliranje i obilježavanje kablova i žica kao i mehatroničke komponente.

Isključivo mehanički alati (bez upotrebe struje!) kao što su kliješta, škare, odvijači, alati za skidanje izolacije i sl. ne podliježu RoHS / WEEE / ElektroG.

U pojedinim slučajevima Schlemmer proizvodi ne moraju biti u skladu s RoHS-om kada su instalirani u "velikim nepokretnim industrijskim alatima" (strojogradnja). (Točka 6, Dodatak IA, 2002/96/EC).

Međutim, električni alati za rezanje, skidanje, gnječenje, pritiskanje i stezanje obuhvaćeni su ovim pravilima.

Također su obuhvaćeni električni mjerni alati, pisači, strojevi za utiskivanje. Međutim, ove proizvode Schlemmer ne distribuira.

Iako većina Schlemmer proizvoda nije izravno obuhvaćena RoHS / WEEE / ElektroG direktivama, naša je briga savjetovati naše klijente o korištenju ugradbenih ili dodatnih proizvoda u elektro i elektroničkoj opremi te osigurati pravovremene informacije o usklađenosti sa graničnim vrijednostima navedenim u Odjeljku 5. RoHS / ElektroG.

Što se tiče Schlemmer proizvoda od mesinga, na njih se odnosi izuzetak naveden u točki 6. dodatka RoHS-a prema kojem su bakrene legure s udjelom olova do 4,0 posto težine izuzete. Mi koristimo mesing legure s udjelom olova max. 3,5 posto težine za proizvode o kojima je riječ, pa su zbog toga u skladu s RoHS zahtjevima.

RoHS/ElektroG/WEEE

Products bearing this mark comply with the EU Directive 2002/95/EC banning the use of certain substances in the manufacture or processing of electrical and electronic equipment and components. The objective of Schlemmer is to exclude the use of particularly problematic material components in the products in question. Amongst other things, this entails lead-free soldering of electronic components, withdraw of toxic flame retardants in the manufacture of cables and cable protection devices and the introduction of suitable substitute products.
The following substances are not contained in the abovementioned equipment according to the directive:

- Lead
- Mercury
- Cadmium
- Sexavalent chromium
- Polybrominated biphenyls (PBB)
- Polybrominated diphenyl ethers (PBDE)

The revised Appendix to the Directive specifies maximum concentrations for the materials contained in a product. The permitted concentrations are 0.01% by weight for cadmium and 0.1% by weight for the other five substances. Brass and copper alloys must not contain more than 4% lead by weight.

The acronym RoHS means „Restriction of the use of certain hazardous substances in electrical and electronic equipment“. A transitional period for manufacturers and industries affected by this Directive was effective until July 1, 2006.

Declaration regarding the Implementation of Directive 2002/95/EC (RoHS) of 27 01.2003 and of the German Electrical and Electronic Equipment Act (ElektroG) of 16 03.2005 as well as of the Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC

The Schlemmer products delivered to you do not contain - according to our knowledge – substances in concentrations, preparations or applications whose placing on the market is forbidden in accordance with the current requirements of the European directive 2002/95/EC (RoHS) of 27. 01.2003 and the German Electrical and Electronic Equipment Act (ElektroG) of 16.03.2005.

Furthermore, Schlemmer products also do not contain any chromised coatings with hexavalent chromium in the surface.

Schlemmer products are mostly components without any independent function and therefore not subjected to RoHS/WEEE/ElektroG.

These components include cables and wires; customised cables and wires; glands; protection hose systems; connectors and components for their endings, installing and marking cables and wires as well as mechatronics components.

Purely mechanical tools (no electric current!) such as tongs, scissors, power screwdrivers, stripping tools etc. are not subjected to RoHS/WEEE/ElektroG.

In particular Schlemmer products need not comply with RoHS when they are installed in „large-scale stationary industrial tools“ (machine construction). (Item 6, Annex IA, 2002/96/EC).

However, electrical tools for cutting, stripping, crimping, pressing and shrinking are concerned.
Also electrical measuring tools, printers, embossing machines are concerned. These products, however, are not distributed by Schlemmer.

Even if the vast majority of Schlemmer products are not directly concerned by RoHS/WEEE/ElektroG, it is our concern to consult our customers using products as built-in or add-on parts in electrical and electronic equipment and provide early information on compliance with the threshold values specified in Section 5 of RoHS/ElektroG.

As far as Schlemmer products made of brass are concerned, the exceptional rule stated under Item 6 of the Annex to RoHS applies according to which copper alloys with a lead portion of up to 4.0 weight per cent are exempted from the requirements. We use brass alloys with a lead portion of max. 3.5 weight per cent for the articles concerned and therefore are consistent with the RoHS requirements.

REACH – novi europski zakonodavni okvir za kemikalije

1. Što je REACH?

REACH je kratica za "registraciju, evaluaciju, autorizaciju i ograničavanje kemikalija"

Svrha ovog pravilnika je osigurati visoku razinu zaštite zdravlja ljudi i okoliša, kao i slobodan protok tvari na unutarnjem tržištu, uz povećanje konkurentnosti i inovacije.

REACH polazi od pretpostavke da proizvođači, uvoznici i daljnji korisnici moraju osigurati da proizvode plasiraju na tržište ili koriste samo tvari koje ne štete ljudskom zdravlju ili okolišu. Sve njegove odredbe se temelje na načelu opreza.

Registracija tvari je obvezna za sve one koji proizvode ili uvoze više od jedne metričke tone tvari godišnje.

Neregistrirane tvari ne smiju se koristiti ili prodavati.

U slučaju da su tvari "vrlo visokog rizika", njihova će upotreba biti odobrena ili ograničena.

2. Da li se REACH odnosi na vas?

REACH se odnosi na proizvođače, uvoznike i korisnike kemikalija

Tvari moraju biti registrirane od strane onoga tko ih stavlja na tržište, tj.proizvođača ili uvoznika.

Tvrtke koje kupuju tvari na europskom tržištu nazivaju se "daljnji korisnici ".

Fazni pristup s različitim rokovima je razvijen kako bi se olakšala registracija. Neke tvari su izuzete od registracije - na primjer kisik, vodik te neopasni prirodni spojevi ili pak druge tvari koje su regulirane drugačije, poput farmaceutskih proizvoda, biocida ili kozmetike.

Proizvođači i uvoznici

Moraju prijaviti sve tvari koje proizvode ili uvoze u količinama većim od jedne metričke tone godišnje.

Neregistrirane tvari ne smiju se koristiti ili stavljati na tržište. Registracija treba biti popraćena tehničkom dokumentacijom (proširena MSDS) i - ovisno o tvari ili iznosu - izvješćem kemijske sigurnosti koje obuhvaća sve identificirane načine korištenja za koje proizvođač zna da postoje.

Daljnji korisnici

Također, ukoliko ih sam sintetizira ili uvozi obvezan je registrirati tvari, podjednako kao kod kupovine.

Osim toga, korisnik mora provjeriti je li njegova pojedinačna uporaba tvari uključena u izvješću proizvođača o kemijskoj sigurnosti.

Ako nije, može zatražiti od proizvođača da ga uključi u izvješće o kemijskoj sigurnosti ili može pripremiti svoje izvješće o kemijskoj sigurnosti.

Za najnovije Schlemmerove informacije o REACH-u molimo posjetite:

www.schlemmer.com / Downloads / Reach

REACH – The new European chemical legislation

1. What is REACH?

REACH is an abbreviation for „Registration, Evaluation, Authorization and Restriction of Chemicals“

The purpose of this regulation is to ensure a high level of protection of human health and the environment as well as the free circulation of substances on the internal market while enhancing competitiveness and innovation.

REACH parts from the premise that manufacturers, importers and downstream users must make sure that they only manufacture, place on the market or use substances that do not harm human health or the environment. All its provisions are based on the precautionary principle.

Substance registration is mandatory for anyone who produces or imports more than one metric ton of a substance per year.

Unregistered substances may not be used or marketed.

Substances only have to be authorized or even restricted, if they are „of very high concern“.

2. Does REACH apply to you?

REACH applies to manufacturers, importers and users of chemicals

Substances must be registered by whoever places them on the market, i.e., the manufacturers or importers.

Companies that buy substances in the European market are called "downstream users".

A phased approach with different deadlines has been developed in order to facilitate registration. Some substances have been exempted from registration for example oxygen, hydrogen and other, as not dangerous known natural substances or other substances, which are regulated other wise like pharmaceuticals, biocides or cosmetics.

Manufacturers and importers

Must register all substances which they manufacture or import in quantities of more than one metric ton per year.

Unregistered substances may not be used or marketed. The registration should be accompanied by a technical dossier (expanded MSDS) and - depending on the substance or the amount - a chemical safety report that includes all the identified uses that the manufacturer is aware of.

Downstream users

May also be required to register substances if they not only purchase but also synthesize or import substances.
In addition, users must check whether their individual use of the substance has been included in the manufacturer's chemical safety report.
If not, they can either ask the manufacturer to include this use in its chemical safety report or prepare their own chemical safety report.






For the latest Schlemmer Information about REACH please visit:
www.schlemmer.com / Downloads / Reach

Sustavi zaštite (IP) za električnu opremu prema EN 60529
Modes of Protection (IP) for electric operating material according to EN 60529

Prvi indeks
1st figure

Stupnjevi zaštite materijala od dodira i stranih tijela
Degree of protection against contact and foreign matters protection




IP specifikacije/Specifications

0		bez zaštite no protection
1		Zaštita od prodora čvrstih stranih tijela većih od 50 mm. (nehotičan dodir rukom) Protection against penetration by solid foreign matters larger than 50 mm (accidental touching by hand)
2		Zaštita od prodora čvrstih stranih tijela većih od 12 mm. (dodir prstima) Protection against penetration by solid foreign matters larger than 12 mm (touching with fingers)
3		Zaštita od prodora čvrstih stranih tijela većih od 2,5 mm. (dodir alatima, žicama, itd. promjera većeg od 2,5 mm) Protection against penetration by solid foreign matters larger than 2,5 mm (touching with tools, wires etc. larger than 2,5 mm)
4		Zaštita od prodora čvrstih stranih tijela većih od 1 mm. (dodir alatima, žicama, itd. promjera većeg od 1 mm) Protection against penetration by solid foreign matters larger than 1 mm (touching with tools, wires etc. larger than 1 mm)
5		Potpuna zaštita prilikom dodirivanja. Zaštita od naslaga prašine. Prodor prašine nije u potpunosti spriječen. Complete protection from being touched. Protection from harmful dust deposits - dust penetration is not completely prevented.
6		Potpuna zaštita prilikom dodirivanja. Zaštita od prodara prašine. Complete protection from being touched. Protection against penetration by dust.

Drugi indeks
2nd figure

Stupnjevi zaštite materijala od utjecaja vode i tekućina
Degree of protection against fluids (water protection)

IP specifikacije/Specifications

0		bez zaštite no protection
1		Zaštita od okomitog kapanja vode. Protection against vertically dripping water
2		Zaštita od kapljica vode koje padaju pod kutem do maksimalno 15° od okomice. Protection against drip water falling at an angle of up to 15 degrees
3		Zaštita od prskanja vode pod kutem do maksimalno 60° od okomice. Protection against spray water falling at an angle of up to 60 degrees
4		Zaštita od prskanja vode iz bilo kojeg smjera. Protection against splash water from all directions
5		Zaštita od mlaza vode iz bilo kojeg smjera. Protection against water jets from all directions
6		Zaštita od kratkotrajnog prodora vode od, primjerice, velikih valova. Protection against temporary flooding e.g. by rough sea
7		Zaštita od prodora vode u proizvod, ako je uronjen u vodu pod određenim tlakom u neodređenom trajanju. Protection when submersed in water at specified pressure and unspecified duration
8		Zaštita od prodora vode u proizvod uronjen u vodu s povećanim tlakom u neodređenom trajanju. Protection when submersed in water at elevated pressure and unspecified time

Kemijska otpornost plastičnih materijala

+ označava otpornost
o označava uvjetnu otpornost
- označava nepostojanje otpornosti

	Koncentracija %	pri temperaturi +°C	Poliamid	Poliamid	Poliamid	Termoplastični poliuretan	Polipropilen	Polietilen	Polietilen	Polistiren	Termoplastični elastomer	Guma od nitrila
Reagens			**PA 6**	**PA 66**	**PA 12**	**PU**	**PP**	**HD-PE**	**LD-PE**	**PS**	**TPE**	**NBR**
Acetaldehid	40	20	o	o	+		+					20°C o
Aceton	100	20	+	+	+	-	+	o	o			-
Akrilna kiselina	100	> 30	-	-	-					-		
Alkohol	96	20	o	o	+		+	+	+	20% +		
Alkohol etilni, hidratizirani	10	20	40 Vol.%+	40 Vol.%+	40 Vol.%+		+				+	+
Alkohol metilni	100	20	+	+	+		40°C +	+	+	+	+	+
Aluminij klorid, hidratizirani	razrijeđen	40					+	+	+	+		20°C +
Aluminij sulfat, hidratizirani	razrijeđen	40					+	+	+	+		20°C +
Aluminij, hidrat	razrijeđen	40					+	+	+	+		20°C +
Amonij klorid, hidratizirani	zasićen	60				3% o	+	+	+			20% +
Amonij nitrat, hidratizirani	razrijeđen	40					+	+	+	+		20% +
Amonij sulfat, hidratizirani	razrijeđen	40					+	+	+			-
Amonijak, otopina	zasićena	20	20% +	20% +	20% +		+	+	+	20% +		
Anilin hidroklorid, hidratizirani	zasićen	20					+	o	o			
Anilin, čisti	100	20	o	o	o		+	+	+	-	+	
Bakar monoklorid, hidratizirani	zasićen	20					+	+	+			+
Bakar sulfat, hidratizirani	zasićen	60					+	+	+			20% +
Benzaldehid, hidratizirani	zasićen	20	čisti o	čisti o	čisti o		+			-		-
Benzin	100	20	+	+	+		o	+	o	-	o	+
Benzol	100	20	+	+	+		o	o	o	-		-
Benzolna kiselina, hidratizirana	sve	40	20% o	20% o			+	+	+	+		-
Boraks, hidratizirani	razrijeđen	40					+	+	+	+		20% o
Borna kiselina, hidratizirana	razrijeđena	40	o	o	o	3% o	+	+	+			20% +
Brom, hidratizirani	100	20	-	-	-		-	-	-	-	-	-
Bromna kiselina	do 10	40	-	-	-		+	+	+			-
Butandiol, hidratizirani	do 10	20	čisti +	čisti +			+	+	+			
Butanol	do 100	20					+	+	+	+		+
Butil acetat	100	20	+	+	+		o	o	o	-		-
Cikloheksanol	-	20	+	+	+		+	+	+	+		+
Cink klorid, hidratizirani	razrijeđen	60	10% o	10% o			+	+	+	50°C +		20°C +
Cink sulfat, hidratizirani	razrijeđen	60					+	+	+			20°C +
Dizelsko gorivo		85	+	+	+	20°C +	20°C +	20°C +	20°C +			
Dušična kiselina, hidratizirana	50	20	-	-	-	3% -	o	o	o	30% +		-
Etil diklorid	100	20					o	-	-			-
Etil eter	100	20					o					o
Etilen oksid, tekući	100	20					o					
Fluor	50	40	čisti -	čisti -	čisti -		-	-	-			
Formaldehid, hidratizirani	razrijeđen	40	čisti +	čisti +	čisti +		40% +	40% +	40% +	30% +		20°C o
Fosforna kiselina, hidratizirana	razrijeđena	20	10% -	10% -	10% -	3% o	+	+	+	86% +		-
Fosforni pentoksid	100	20					+					
Fosgen, plinovit	100	20					o	o	o			
Glukoza, hidratizirana	sve	50					+	+	+			
Hidraulička tekućina, teško zapaljiva		80	+	+	+							
Hidraulično ulje, H i HL (po DIN 51524)		100	+	+	+							
Hidro silicijfluoroksid, hidratizirani	do 30	20	-	-			+	+	+			
Hidroksilamin sulfat, hidratizirani	do 12	30					+					
Kalcij klorid, hidratizirani	zasićen	40	+	+	+		+	+	+	+		20% +
Kalij bromid, hidratizirani	sve	20	10% +	10% +	10% +		+	+	+	+		
Kalij dikromat, hidratizirani	40	20	5% o	5% o	5% o		+	+	+			+
Kalij klorid, hidratizirani	10	20	+	+	+		+	+	+	+		+
Kalij nitrat, hidratizirani	sve	20	10% +	10% +	10% +		+	+	+	+		+
Kalij permanganat, hidratizirani	zasićen	20					+			+		
Kerozin	100	80	+	+	+		20°C +	20°C +	20°C o	-		
Klor	sve	20	-	-	-		-	-	-	-		-
Klor, otopina	12,5 Cl	20	-	-	o	3% -	+	+	+	+		-

Kemijska otpornost plastičnih materijala

+ označava otpornost
o označava uvjetnu otpornost
- označava nepostojanje otpornosti

	Koncentracija %	pri temperaturi +°C	Poliamid	Poliamid	Poliamid	Termoplastični poliuretan	Polipropilen	Polietilen	Polietilen	Polistiren	Termoplastični elastomer	Guma od nitrila
Reagens			**PA 6**	**PA 66**	**PA 12**	**PU**	**PP**	**HD-PE**	**LD-PE**	**PS**	**TPE**	**NBR**
Klorna kiselina	30	20	20% -	20% -	20% -	3% -	+	+	+	15% +	10% +	o
Kositrov oksid, hidratizirani	razrijeđen	40					+	+	+	-	10% +	20°C +
Krezol, hidratizirani	do 90	20	čisti -	čisti -			+	+	o	o		-
Kromal, hidratizirani	razrijeđen	40					+	+	+			20% +
Limunska kiselina	do 10	40	20% +	20% +	20% +	3% o	+	+	+	+		20% +
Magnezij karbonat, hidratizirani	zasićen	100					+			50°C +		
Magnezij klorid, hidratizirani	zasićen	20	10% +	10% +	10% +		+	+	+	+		+
Maziva na bazi dvoesterskog ulja		110	o	o								
Maziva na bazi polifenilskog estera		110	+	+	+							
Maziva na bazi silikonskog ulja		110	+	+	+							
Metilen klorid	100	20	o	o	o		o	o	-			
Mliječna kiselina, hidratizirana	do 90	20	10% +	10% +	10% +	3% o	+	+	+	80% +		+
Morska voda		40	+	+	+	20°C +	+	+	+	+	+	20°C +
Mravlja kiselina, hidratizirana	10	20	o	o	+		+	+		+		
Natrij klorat, hidratizirani	zasićen	20	10% o	10% o	10% o		+	+	+			
Natrij sulfid, hidratizirani	razrijeđen	40					+	+	+			
Nikal klorid, hidratizirani	zasićen	20	10% o	10% o	10% o		+			+		+
Nikal sulfat, hidratizirani	zasićen	20	10% o	10% o	10% o		+	+	+			+
Nitroglicerin	razrijeđen	20						-	-			
Octena kiselina	100	20					+	+	+			o
Octena kiselina	10	20	o	o	+	3% o	+	+	+	o	+	
Oksalatska kiselina	sve	20	10% o	10% o	10% o	3% o	+	+	+	+		o
Oleinska kiselina	-	20	+	+	+		+	+	+	+		o
Otopina sapuna, hidratizirana	sve	20	razrijeđena+	razrijeđena+	razrijeđena+		+	+	+			+
Otpadni plin koji sadrži SO2	niska	60						+	+			
Otpadni plin koji sadrži ugljik dioksid	sve	60						+	+			
Ozon	čisti		-	-	-		o	o	o			
Rashladne tekućine po DIN 53521		120	o	o								
Soda kaustična, hidratizirana	50	20	+	+	+		+	+	+	+	10% +	
Soda, hidratizirana	10	20	+	+	+	3% o	+	+	+	+	50% +	
Sumporna kiselina, hidratizirana	10	20	-	-	-	3% -	50% +	50% +	50% +	+	98% +	-
Toluol	100	20	+	+	+	-		o	o	o		-
Trikloretilen	100	20	o	o	o		o	o	-			
Ugljik bisulfid	100	20	+	+	+		+	o	o	-		-
Ugljik dioksid	100	60	+	+	+							20% +
Ugljik dioksid, suhi	100	60					+	+	+	50°C +		20% +
Ugljik tetraklorid	100	20	+	+	+		-	o	-	-		
Ulja i masti		20	+	+	+		o				o	
Ulje mineralno			+	+	+		20°C +	20°C +	20°C +			
Ulje za bušenje			+	+	+							
Urea, hidratizirana	do 10	40	20% +	20% +	20% +		+	+	+	+		
Vinil acetat	100	20					+					
Vodikov superoksid	100	60	20°C +	20°C +	20°C +		+	+	+			20°C +
Xylol	100	20	+	+	+		-	o	o	-		-
Željezni cijanid, hidratizirani	zasićen	60					+	+	+			
Željezni klorid, hidratizirani, neutralan	10	20	+	+		+	+	+	+		+	
Živa	čista	20	+	+	+		+	+	+	+		+

Izvor: Kunststoff-Tabellen, B. Carlowitz, Carl Hanser Verlag i drugi

Navedeni podaci mogu služiti za preliminarni izbor materijala ali time ne garantiraju svojstva proizvoda i ne potvrđuju da su određeni proizvodi odgovarajući za određenu upotrebu. Unatoč ovim podacima, kupac treba provjeriti da li je kvaliteta proizvoda odgovarajuća.

Chemical resistance of plastic materials

+ resistant
o conditionally resistant
- not resistant

	Conzentration %	at temp. +°C	Polyamide	Polyamide	Polyamide	Thermoplastic Polyurethane	Polypropylene	Polyethylene	Polyethylene	Polystyrene	Thermoplastic elastomere	Nitrile-butadiene-rubber
Reagent			**PA 6**	**PA 66**	**PA 12**	**PU**	**PP**	**HD-PE**	**LD-PE**	**PS**	**TPE**	**NBR**
Acetaldehyde	40	20	o	o	+	+						20°C o
Acetic acid	100	20					+	+	+			o
Acetone	100	20	+	+	+	-	+	o	o			-
Acrylic acid	100	> 30	-	-	-	-						
Allyl alcohol	96	20	o	o	+		+	+	+	20% +		
Alum, hydrous	dilute	40					+	+	+	+		20°C +
Aluminium chloride, hydrous	dilute	40					+	+	+	+		20°C +
Aluminium sulphate, hydrous	dilute	40					+	+	+	+		20°C +
Ammonia solution, hydrous	saturated	20	20% +	20% +	20% +		+	+	+	20% +		
Ammonium chloride, hydrous	saturated	60				3% o	+	+	+			20% +
Ammonium nitrate, hydrous	dilute	40					+	+	+	+		20% +
Ammonium sulphate, hydrous	dilute	40					+	+	+			-
Aniline hydrochloride, hydrous	saturated	20					+	o	o			
Aniline, pure	100	20	o	o	o		+	+	+	-	+	
Benzaldehyde, hydrous	saturated	20	pure o	pure o	pure o		+			-		-
Benzine	100	20	+	+	+		o	+	o	-	o	+
Benzoic acid, hydrous	any	40	20% o	20% o			+	+	+	+		-
Benzole	100	20	+	+	+		o	o	o	-		-
Bleaching liquor	12,5 Cl	20	-	-	o	3% -	+	+	+	+		-
Borax, hydrous	dilute	40					+	+	+	+		20% o
Boric acid, hydrous	dilute	40	o	o	o	3% o	+	+	+			20% +
Bromine, liquid	100	20	-	-	-		-	-	-	-	-	-
Butanediol, hydrous	to 10	20	pure +	pure +			+	+	+			
Butanol	to 100	20					+	+	+	+		+
Butylacetate	100	20	+	+	+		o	o	o	-		-
Calcium chloride, hydrous	saturated	40	+	+	+		+	+	+	+		20% +
Carbon bisulphide	100	20	+	+	+		+	o	o	-		-
Carbon dioxide	100	60	+	+	+							20% +
Carbon dioxide, dry	100	60					+	+	+	50°C +		20% +
Carbon tetrachloride	100	20	+	+	+		-	o	-	-		
Caustic potash solution, hydrous	50	20	+	+	+		+	+	+	+	10% +	
Caustic soda lye, hydrous	10	20	+	+	+	3% o	+	+	+	+	50% +	
Chlorine	any	20	-	-	-		-	-	-	-		-
Chrome alum, hydrous	dilute	40					+	+	+			20% +
Citric Acid	to 10	40	20% +	20% +	20% +	3% o	+	+	+	+		20% +
Cooling liquids DIN 53521		120	o	o								
Copper monochloride, hydrous	saturated	20					+	+	+			+
Copper sulphate, hydrous	saturated	60					+	+	+			20% +
Cresol, hydrous	to 90	20	pure -	pure -			+	+	o	o		-
Cyclohexanol	-	20	+	+	+		+	+	+	+		+
Diesel fuel		85	+	+	+	20°C +	20°C +	20°C +	20°C +			
Drilling oil			+	+	+							
Ethanoic acid	10	20	o	o	+	3% o	+	+	+	o	+	
Ethyl alcohol, hydrous	10	20	40 Vol.%+	40 Vol.%+	40 Vol.%+		+				+	+
Ethyl dichloride	100	20					o	-	-			-
Ethyl ether	100	20					o					o
Ethylene oxide, liquid	100	20					o					
Ferric cyanide, hydrous	saturated	60					+	+	+			
Ferrous chloride, hydrous, indiff.	10	20	+	+		+	+	+	+		+	
Fluorine	50	40	pure -	pure -	pure -		-	-	-			
Formaldehyde, hydrous	dilute	40	pure +	pure +	pure +		40% +	40% +	40% +	30% +		20°C o
Formic acid, hydrous	10	20	o	o	+		+	+		+		
Glucose, hydrous	any	50					+	+	+			
Hydraulic fluid, hardly inflammable		80	+	+	+							
Hydraulic oil H and HL (DIN 51524)		100	+	+	+							

Chemical resistance of plastic materials

	Conzentration %	at temp. +°C	Polyamide	Polyamide	Polyamide	Thermoplastic Polyurethane	Polypropylene	Polyethylene	Polyethylene	Polystyrene	Thermoplastic elastomere	Nitrile-butadiene-rubber
Reagent			**PA 6**	**PA 66**	**PA 12**	**PU**	**PP**	**HD-PE**	**LD-PE**	**PS**	**TPE**	**NBR**
Hydrobromic acid, hydrous	to 10	40	-	-	-		+	+	+			-
Hydrochloric acid, hydrous	30	20	20% -	20% -	20% -	3% -	+	+	+	15% +	10% +	o
Hydrogen	100	60	20°C +	20°C +	20°C +		+	+	+			20°C +
Hydrosilicofluoric acid, hydrous	to 30	20	-	-			+	+	+			
Hydroxylamine sulphate, hydrous	to12	30					+					
Kerosine	100	80	+	+	+		20°C +	20°C +	20°C o	-		
Lactic acid, hydrous	to 90	20	10% +	10% +	10% +	3% o	+	+	+	80% +		+
Lubricating grease, base diesteroil		110	o	o								
Lubricating grease (base polyphenyleester)		110	+	+	+							
Lubricating grease, base siliconeoil		110	+	+	+							
Magnesium carbonate, hydrous	saturated	100					+			50°C+		
Magnesium chloride, hydrous	saturated	20	10% +	10% +	10% +		+	+	+	+		+
Mercury	pure	20	+	+	+		+	+	+	+		+
Methyl alcohol	100	20	+	+	+		40°C+	+	+	+	+	+
Methylene chloride	100	20	o	o	o		o	o	-			
Mineral oil			+	+	+		20°C +	20°C +	20°C +			
Nickel chloride, hydrous	saturated	20	10% o	10% o	10% o		+			+		+
Nickel sulphate, hydrous	saturated	20	10% o	10% o	10% o		+	+	+			+
Nitric acid, hydrous	50	20	-	-	-	3% -	o	o	o	30% +		-
Nitroglycerin	dilute	20						-	-			
Oil and grease		20	+	+	+		o				o	
Oleic acid	-	20	+	+	+		+	+	+	+		o
Oxalic acid	any	20	10% o	10% o	10% o	3% o	+	+	+	+		o
Ozone	pure		-	-	-		o	o	o			
Phosgene, gaesous	100	20					o	o	o			
Phoshoric acid, hydrous	dilute	20	10% -	10% -	10% -	3% o	+	+	+	86% +		-
Phosphoruspentoxide	100	20					+					
Potassium bromide, hydrous	any	20	10% +	10% +	10% +		+	+	+	+		
Potassium chloride, hydrous	10	20	+	+	+		+	+	+	+		+
Potassium dichromate, hydrous	40	20	5% o	5% o	5% o		+	+	+			+
Potassium nitrate, hydrous	any	20	10% +	10% +	10% +		+	+	+	+		+
Potassium permangnate, hydrous	saturated	20					+			+		
Sea water		40	+	+	+	20°C +	+	+	+	+	+	20°C +
Soap solution, hydrous	any	20	dilute +	dilute +	dilute +		+	+	+			+
Sodium chlorate, hydrous	saturated	20	10% o	10% o	10% o		+	+	+			
Sodium sulphide, hydrous	dilute	40					+	+	+			
Sulphuric acid, hydrous	10	20	-	-	-	3% -	50% +	50% +	50% +	+	98% +	-
Tin dichloride, hydrous	dilute	40					+	+	+	-	10% +	20°C +
Toluene	100	20	+	+	+	-		o	o	o		-
Trichloroethylene	100	20	o	o	o		o	o	-			
Urea, hydrous	to 10	40	20% +	20% +	20% +		+	+	+	+		
Vinyl acetate	100	20					+					
Waste gas, containing carbon dioxide	any	60						+	+			
Waste gas, containing SO2	low	60						+	+			
Xylene	100	20	+	+	+	-		o	o	-	-	
Zinc chloride, hydrous	dilute	60	10% o	10% o			+	+	+	50°C +		20°C +
Zinc sulphate, hydrous	dilute	60					+	+	+			20°C +

Quelle: Kunststoff-Tabellen, B. Carlowitz, Carl Hanser Verlag, and others

The above mentioned data enable a preselection. However it is not the use of the data, to promise definite properties of the products or their suitability for a concrete application purpose. The data doesn't release the purchaser to control the quality conformance.

7

Tablice za pretvorbu / Conversion charts

Mjere / Measures

Britanske i američke, sa približnim metričkim ekvivalentima

Mjere duljine	
1 inč/inch	= točno 25.4 millimetara
1 stopa/foot = 12 inča/inches	= točno 0.3048 metara
1 jard/yard = 3 stope/feet	= točno 0.9144 metara
1 milja/mile = 1.760 jardi/yards	= 1.609 kilometara

Metričke, sa približnim britanskim ekvivalentima

mjere duljine	
1 millimetar	= 0.039 inča/inch
1 centimetar = 10 mm	= 0.394 inča/inch
1 decimetar = 10 cm	= 3.94 inča/inches
1 metar = 10 dm	= 1.094 jardi/yards
1 dekametar = 10 m	= 10.94 jardi/yards
1 hektometar = 100 m	= 109.4 jardi/yards
1 kilometar = 1000 m	= 0.6214 milje/mile

Rebraste cijevi / Corrugated tubes

Vanjski-Ø u inčima/colima (mm) od - do Outside Ø in inches (mm) from - to	Unutarnji-Ø u inčina/colima (mm) od - do Inside Ø in Inches (mm) from - to	odgovarajući NW corresponding NW
5/32" (3.97 mm) - 3/16" (4.76 mm)	1/8" (3.18 mm)	3
1/4" (6.35 mm) - 5/16" (7.94 mm)	3/16" (4.76 mm) - 5/32" (3.97 mm)	4.5
1/4" (6.35 mm) - 5/16" (7.94 mm)	3/16" (4.76 mm) - 5/32" (3.97 mm)	4.5 AHW
3/8" (9.53 mm)	1/4" (6.35 mm)	6
3/8" (9.53 mm)	1/4" (6.35 mm)	6 AHW
7/16" (11.11 mm)	1/4" (6.35 mm)	7.5
15/32" (11.91 mm)	5/16" (7.94 mm)	8.5
7/16" (11.11 mm) - 1/2" (12.70 mm)	5/16" (7.94 mm)	8.5 AHW
1/2" (12.70 mm)	3/8" (9.53 mm)	10
5/8" (15.88 mm)	3/8" (9.53 mm) - 7/16" (11.11 mm)	11 AHW
5/8" (15.88 mm)	7/16" (11.11 mm)	12
5/8" (15.88 mm)	1/2" (12.70 mm)	13
11/16" (17.46 mm)	9/16" (14.29 mm)	14
3/4" (19.05 mm) - 7/8" (22.23 mm)	1/2" (12.70 mm) - 5/8" (15.88 mm)	15 AHW
3/4" (19.05 mm)	19/32" (15.08 mm)	16
13/16" (20.64 mm) - 7/8" (22.23 mm)	5/8" (15.88 mm)	17
15/16" (23.81 mm)	3/4" (19.05 mm)	19
1" (25.40 mm) - 1 1/16" (26.99 mm)	3/4" (19.05 mm)	19 AHW
1" (25.40 mm)	27/32" (21.43 mm)	22
1 1/16" (26.99 mm) - 1 1/8" (28.58 mm)	7/8" (22.23 mm)	23
1 1/4" (31.75 mm)	1" (25.40 mm)	26
1 1/4" (31.75 mm)	7/8" (22.23 mm) - 1" (25.40 mm) - 1 1/16" (26.99 mm)	26 AHW
1 3/8" (34.93 mm) - 1 1/2" (38.10 mm)	1 1/16" (26.99 mm)	29
1 1/2" (38.10 mm)	1 1/4" (31.75 mm) - 1 1/2" (38.10 mm)	34 AHW
1 11/16" (42.86 mm) - 1 7/8" (47.63 mm)	1 1/4" (31.75 mm) - 1 3/8" (34.93 mm)	37
2 1/8" (53.98 mm)	1 1/2" (38.10 mm) - 1 7/8" (47.63 mm)	50

Milimetri u inče / mm to inches

Vrijednost pretvorbe / Exchange value: 1 inč = 25,4 mm

	inč/col									
mm	0	1	2	3	4	5	6	7	8	9
0	0	0.03937"	0.07874"	0.11811"	0.15748"	0.19685"	0.23622"	0.27559"	0.31496"	0.35433"
10	0.39370"	0.43307"	0.47244"	0.51181"	0.55118"	0.59055"	0.62992"	0.66929"	0.70866"	0.74809"
20	0.78740"	0.82677"	0.86614"	0.90551"	0.94488"	0.98425"	1.02362"	1.06299"	1.10236"	1.14173"
30	1.18110"	1.22047"	1.25984"	1.29921"	1.33858"	1.37795"	1.41732"	1.45669"	1.49606"	1.53543"
40	1.57480"	1.61417"	1.65354"	1.69291"	1.73228"	1.77165"	1.81102"	1.85039"	1.88976"	1.92913"
50	1.96851"	2.00787"	2.04724"	2.08661"	2.12598"	2.16535"	2.20472"	2.24409"	2.28346"	2.32283"
60	2.36221"	2.40157"	2.44095"	2.48031"	2.51968"	2.55905"	2.59842"	2.63779"	2.67716"	2.71653"
70	2.75591"	2.79527"	2.83465"	2.87401"	2.91338"	2.95275"	2.99212"	3.03149"	3.07086"	3.11024"
80	3.14961"	3.18897"	3.22835"	3.26772"	3.30709"	3.34646"	3.38583"	3.42520"	3.46457"	3.50394"
90	3.54331"	3.58268"	3.62205"	3.66142"	3.70079"	3.74016"	3.77953"	3.81890	3.85827"	3.89764"

Primjer/Example: 64.362 mm = 64 mm + 0.36 mm + 0.002 mm
= 2.51968 + 0.01417 + 0.00008 = 2.53393"

Normalni profil - AHW / Normal Profile - Automotive High Wave

Normalni profil + UFW NW	AHW NW	Normalni profil + UFW NW	AHW NW	Normalni profil + UFW NW	AHW NW	Normalni profil + UFW NW	AHW NW
3	-	10	8,5	17	15	29	-
4,5	-	12	-	19	-	-	34
6	6	13	11	22	19	37	-
7,5	6	14	-	23	-	50	-
8,5	-	16	-	26	25		

Tablice za pretvorbu / Conversion charts

Inči u milimetre


od 1/64" do 12"
prema DIN 4890 tablica 2
1 inč = 25,400000 milimetara, vidi DIN 4890 tablica 1

Inches - mm

from 1/64" to 12"
accd. to DIN 4890 sheet 2
1 Zoll = 25,400000 Millimeter, see DIN 4890 sheet 1

Inč/col	0	1	2	3	4	5	6	7	8	9	10	11	12
	inča	inč	inča	inča	inča	inča	inča	inča	inča	inča	inča	inča	inča
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
0	**0**	25.400	50.800	76.200	101.600	127.00	152.40	177.80	203.20	228.60	254.00	279.40	304.80
1/64	0.397	25.797	51.197	76.597	102.997	127.40	152.80	178.20	203.60	229.00	254.40	279.80	305.20
1/32	0.794	26.194	51.594	76.994	102.394	127.79	153.19	178.60	203.99	229.39	254.79	280.19	305.59
3/64	1.191	26.591	51.991	77.391	102.791	128.19	153.59	178.99	204.39	229.79	255.19	280.59	306.99
1/16	**1.588**	**26.988**	**52.388**	**77.788**	**103.188**	**128.59**	**153.99**	**179.39**	**204.79**	**230.19**	**255.59**	**280.99**	**306.39**
5/64	1.984	27.384	52.784	78.184	103.584	128.98	154.38	179.78	205.18	230.58	255.99	281.39	306.79
3/32	2.381	27.781	53.181	78.581	103.981	129.38	154.78	180.18	205.58	230.98	256.38	281.78	307.18
7/64	2.778	28.178	53.578	78.978	104.978	129.78	155.18	180.58	205.98	231.38	256.78	282.18	307.58
1/8	**3.175**	**28.575**	**53.975**	**79.375**	**104.775**	**130.18**	**155.58**	**180.98**	**206.38**	**231.78**	**257.18**	**282.58**	**307.98**
9/64	3.572	28.972	54.372	79.772	105.172	130.57	155.97	181.37	206.77	232.17	257.57	282.97	308.37
5/32	3.969	29.369	54.769	80.169	105.569	130.97	156.37	181.77	207.17	232.57	257.97	283.37	308.77
11/64	4.366	29.766	55.166	80.566	105.966	131.37	156.77	182.17	207.57	232.97	258.37	283.77	309.17
3/16	**4.763**	**30.163**	**55.563**	**80.963**	**106.363**	**131.76**	**157.16**	**182.56**	**207.96**	**233.36**	**258.76**	**284.16**	**309.56**
13/64	5.159	30.559	55.959	81.359	106.759	132.16	157.56	182.96	208.36	233.76	259.16	284.56	309.96
7/32	5.556	30.956	56.356	81.756	107.156	132.56	157.96	183.36	208.76	234.16	259.56	284.96	310.36
15/64	5.953	31.353	56.753	82.153	107.553	132.95	158.35	183.75	209.15	234.55	259.95	285.35	310.75
1/4	**6.350**	**31.750**	**57.150**	**82.550**	**107.950**	**133.35**	**158.75**	**184.15**	**209.55**	**234.95**	**260.35**	**285.75**	**311.15**
17/64	6.747	32.147	57.547	82.947	108.347	133.75	159.15	184.55	209.95	235.35	260.75	286.15	311.55
9/32	7.144	32.544	57.944	83.344	108.744	134.14	159.54	184.94	210.34	235.74	261.14	286.54	311.94
19/64	7.541	32.941	58.341	83.741	109.141	134.54	159.94	185.34	210.74	236.14	261.54	286.94	312.34
5/16	**7.938**	**33.338**	**58.738**	**84.138**	**109.538**	**134.94**	**160.34**	**185.74**	**211.14**	**236.54**	**261.94**	**287.34**	**312.74**
21/64	8.334	33.734	59.134	84.534	109.934	135.33	160.73	186.13	211.53	236.93	262.34	287.74	313.14
11/32	8.731	34.131	59.531	84.931	110.331	135.73	161.13	186.53	211.93	237.33	262.73	288.13	313.53
23/64	9.128	34.528	59.929	85.328	110.728	136.13	161.53	186.93	212.33	237.73	263.13	288.53	313.93
3/8	**9.525**	**34.925**	**60.325**	**85.725**	**111.125**	**136.53**	**161.93**	**187.32**	**212.73**	**238.13**	**263.53**	**288.93**	**314.33**
25/64	9.922	35.322	60.722	85.122	111.522	136.92	162.32	187.72	213.12	238.52	263.92	289.32	314.72
13/32	10.319	35.719	61.119	86.519	111.919	137.32	162.72	188.12	213.52	238.92	264.32	289.72	315.12
27/64	10.716	36.116	61.516	86.916	112.316	137.72	163.12	188.52	213.92	239.32	264.72	290.12	315.52
7/16	**11.113**	**36.513**	**61.913**	**87.313**	**112.713**	**138.11**	**163.51**	**188.91**	**214.31**	**239.71**	**265.11**	**290.51**	**315.91**
29/64	11.509	36.909	62.309	87.709	113.109	138.51	163.91	189.31	214.71	240.11	265.51	290.91	316.31
15/32	11.906	37.306	62.706	88.106	113.506	138.91	164.31	189.71	215.11	240.51	265.91	291.31	316.71
31/64	12.303	37.703	63.103	88.503	113.903	139.30	164.70	190.10	215.50	240.90	266.30	291.70	317.10
1/2	**12.700**	**38.100**	**63.500**	**88.900**	**114.300**	**139.70**	**165.10**	**190.50**	**215.90**	**241.30**	**266.70**	**292.10**	**317.50**
33/64	13.097	38.497	63.897	89.297	114.697	140.10	165.50	190.90	216.30	241.70	267.10	292.50	317.90
17/32	13.494	38.894	64.294	89.694	115.094	140.49	165.89	191.29	216.69	242.09	267.49	292.89	318.29
35/64	13.891	39.291	64.691	90.091	115.491	140.89	166.29	191.69	217.09	242.49	267.89	293.29	318.69
9/16	**14.288**	**39.688**	**65.088**	**90.488**	**115.888**	**141.29**	**166.69**	**192.09**	**217.49**	**242.89**	**268.29**	**293.69**	**319.09**
37/64	14.684	40.084	65.484	90.884	116.284	141.68	167.08	192.48	217.88	243.28	268.69	294.09	319.49
19/32	15.081	40.481	65.881	91.281	116.681	142.08	167.48	192.88	218.28	243.68	269.08	294.48	319.88
39/64	15.478	40.878	66.287	91.678	117.078	142.48	167.88	193.28	218.68	244.08	269.48	294.88	320.28
5/8	**15.875**	**41.275**	**66.675**	**92.075**	**117.475**	**142.88**	**168.28**	**193.68**	**219.08**	**244.48**	**269.88**	**295.28**	**320.68**
41/64	16.272	41.672	67.072	92.472	117.872	143.27	168.67	194.07	219.47	244.87	270.27	295.67	321.07
21/32	16.669	42.069	67.469	92.869	118.269	143.67	169.07	194.47	219.87	245.27	270.67	296.07	321.47
43/64	17.066	42.466	67.866	93.266	118.666	144.07	169.47	194.87	220.27	245.67	271.07	296.47	321.87
11/16	**17.463**	**42.863**	**68.263**	**93.663**	**119.063**	**144.46**	**169.86**	**195.26**	**220.66**	**246.06**	**271.46**	**296.86**	**322.26**
45/64	17.859	43.259	68.659	94.059	119.459	144.86	170.26	195.66	221.06	246.46	271.86	297.26	322.66
23/32	18.256	43.656	69.056	94.456	119.856	145.26	170.66	196.06	221.46	246.86	272.26	297.66	323.06
47/64	18.653	44.053	69.453	94.853	120.253	145.65	171.05	195.45	221.85	247.25	272.65	298.05	323.45
3/4	**19.050**	**44.450**	**69.850**	**95.250**	**120.650**	**146.05**	**171.45**	**196.85**	**222.25**	**247.65**	**273.05**	**298.45**	**323.85**
49/64	19.447	44.847	70.247	95.647	121.047	146.45	171.85	197.25	222.65	248.05	273.45	298.85	324.25
25/32	19.844	45.244	70.644	96.044	121.444	146.84	172.24	197.64	223.04	248.44	273.84	299.24	324.64
51/64	20.241	45.641	71.041	96.441	121.841	147.24	172.64	198.04	223.44	248.64	274.24	299.64	325.04
13/16	**20.638**	**46.038**	**71.438**	**96.838**	**122.238**	**147.64**	**173.04**	**198.44**	**223.84**	**249.24**	**274.64**	**300.04**	**325.44**
53/64	21.034	46.434	71.834	97.234	122.634	148.03	173.43	198.83	224.23	249.64	275.04	300.44	325.84
27/32	21.432	46.831	72.231	97.631	123.031	148.43	173.83	199.23	224.63	250.03	275.43	300.83	326.23
55/64	21.828	47.228	72.628	98.028	123.428	148.83	174.23	199.63	225.03	250.43	275.83	301.23	326.63
7/8	**22.225**	**47.625**	**73.025**	**98.425**	**123.825**	**149.23**	**174.63**	**200.03**	**225.43**	**250.83**	**276.23**	**301.63**	**327.03**
57/65	22.622	48.022	73.422	98.822	124.222	149.62	175.02	200.42	225.82	251.22	276.62	302.02	327.42
29/32	23.019	48.419	73.819	99.219	124.619	150.02	175.42	200.82	226.22	251.62	277.02	302.42	327.82
59/64	23.416	48.816	74.216	99.616	125.016	150.42	175.82	201.22	226.62	252.02	277.42	302.82	328.22
15/16	**23.813**	**49.213**	**47.613**	**100.013**	**125.413**	**150.81**	**176.21**	**201.61**	**227.01**	**252.41**	**277.81**	**303.21**	**328.61**
61/64	24.209	49.609	75.009	100.409	125.809	151.21	176.61	202.01	227.41	252.81	278.21	303.61	329.01
31/32	24.606	50.006	75.406	100.806	126.206	151.61	177.01	202.41	227.81	253.21	278.61	304.01	329.41
63/64	25.003	40.403	75.803	101.203	126.603	152.00	177.40	202.80	228.20	253.60	279.00	304.40	329.80


Tablica navoja / Thread Chart




Metrički ISO-navoj prema EN 60423 / Metric ISO thread to EN 60423

ISO ISO	korak navoja mm pitch mm	vanjski Ø D1 mm External Ø D1 mm	Ø jezgre D2 mm Core Ø D2 mm	specifikacija Schlemmera Schlemmer Specification promjer otvora mm Clearance hole mm
10	1,0	10,0	9,0	10,2
12	1,5	12,0	10,5	12,2
16	1,5	16,0	14,5	16,2
20	1,5	20,0	18,5	20,2
25	1,5	25,0	23,5	25,2
32	1,5	32,0	30,5	32,2
40	1,5	40,0	38,5	40,2
50	1,5	50,0	48,5	50,2
63	1,5	63,0	61,5	63,2
75	1,5	75,0	73,5	75,2
80	2,0	80,0	78,0	80,2
90	2,0	90,0	88,0	90,2


Usporedba, promjera navoja
Comparsion, thread diameter

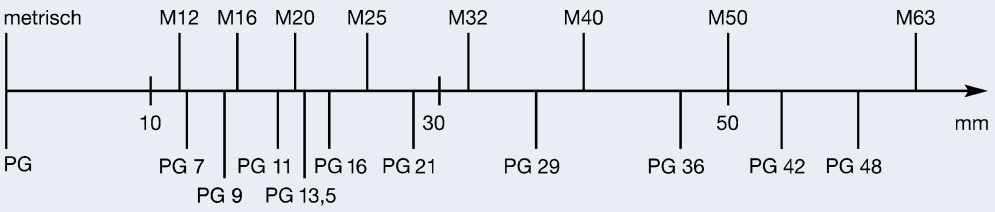




PG-navoj / PG thread

PG PG	korak navoja mm Pitch mm	vanjski Ø D1 mm External Ø D1 mm	Ø jezgre D2 mm Core Ø D2 mm	specifikacija Schlemmera Schlemmer Specification promjer otvora mm Clearance hole mm
7	1,27	12,5	11,28	12,7
9	1,41	15,2	13,86	15,4
11	1,41	18,6	17,26	18,8
13	1,41	20,4	19,06	20,7
16	1,41	22,5	21,16	22,8
21	1,587	28,3	26,78	28,6
29	1,587	37,0	35,48	37,4
36	1,587	47,0	45,58	47,5
42	1,587	54,0	52,48	54,5
48	1,588	59,3	57,78	59,8



NPT (konusni) američki cijevni navoj / NPT (conical) American pipe thread

NPT NPT	korak navoja mm Pitch mm	vanjski Ø mm External Ø mm	broj navoja po jedinici dužine n Number of threads per unit length n
1/4"	1,411	13,616	18
3/8"	1,411	17,055	18
1/2"	1,814	21,223	14
3/4"	1,814	26,568	14
1"	2,208	33,227	11 1/2
1 1/4"	2,208	41,984	11 1/2
1 1/2"	2,208	48,053	11 1/2
2"	2,208	60,091	11 1/2
2 1/2"	3,175	72,699	8
3"	3,175	88,608	8
3 1/2"	3,175	100,013	8



Plinski navoj / Gas pipe thread

BSP BSP	korak navoja mm Pitch mm	vanjski Ø D1 mm External Ø D1 mm	Ø jezgre D2 mm Core Ø D2 mm	specifikacija Schlemmera Schlemmer Specification promjer otvora mm Clearance hole Ø mm
1/4"	1,337	13,157	11,145	13,4
3/8"	1,337	16,662	14,950	17,0
1/2"	1,814	20,955	18,631	21,3
5/8"	1,814	26,441	24,117	26,8
1"	2,309	33,249	30,291	33,7
1 1/4"	2,309	41,910	38,952	42,4
1 1/2"	2,309	47,803	44,845	48,3
2"	2,309	59,614	56,656	60,2
2 1/2"	2,309	75,184	72,226	75,7
3"	2,309	87,884	84,926	88,5
3 1/2"	2,309	100,330	97,372	101,0
4"	2,309	113,030	110,072	114,0

Indeks brojeva artikala
Art.-No. Index

	stranica		page
Indeks brojeva artikala	1-29	**Art.-No. Index**	1-29

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
0000086	2.2	63	0300217	2.2	74	0413035	2.2	83	1200127	2.1	13
0000116	2.2	63	0300284	2.2	74	0413040	2.2	83	1200135	2.1	13
0000140	2.2	63	0300373	2.2	74	0413050	2.2	83	1200143	2.1	13
0000167	2.2	63	0300446	2.2	74	0414770	2.2	85	1200160	2.1	13
0000183	2.2	63	0300489	2.2	74	0414771	2.2	85	1200178	2.1	13
0000230	2.2	63	0401102	2.2	82	0414772	2.2	85	1200194	2.1	13
0000329	2.2	63	0401129	2.2	82	0414773	2.2	85	1200224	2.1	13
0000400	2.2	63	0401153	2.2	82	0414774	2.2	85	1200232	2.1	13
0000450	2.2	63	0401200	2.2	82	0414775	2.2	85	1200263	2.1	13
0000507	2.2	63	0401382	2.2	82	0414776	2.2	85	1200267	2.1	13
0001082	2.2	63	0401501	2.2	82	0414777	2.2	85	1200291	2.1	13
0001112	2.2	63	0401757	2.2	82	0414786	2.2	84	1200372	2.1	13
0001147	2.2	63	0402095	2.2	77	0414788	2.2	84	1200500	2.1	13
0001163	2.2	63	0402109	2.2	77	0414800	2.2	84	1200803	2.1	13
0001180	2.2	63	0402125	2.2	77	0414801	2.2	84	1200804	2.1	13
0001236	2.2	63	0402141	2.2	77	0414802	2.2	84	1200806	2.1	13
0001325	2.2	63	0402142	2.2	77	0414803	2.2	84	1200807	2.1	13
0001406	2.2	63	0402150	2.2	77	0414804	2.2	84	1200808	2.1	13
0001457	2.2	63	0402206	2.2	77	0414805	2.2	84	1200810	2.1	13
0001503	2.2	63	0402257	2.2	77	0803065	2.2	52	1200812	2.1	13
0100072	2.2	67	0402303	2.2	77	0803081	2.2	52	1200813	2.1	13
0100102	2.2	67	0402389	2.2	77	0803103	2.2	52	1200814	2.1	13
0100137	2.2	67	0402508	2.2	77	0803146	2.2	52	1200816	2.1	13
0100153	2.2	67	0402753	2.2	77	0803189	2.2	52	1200817	2.1	13
0100170	2.2	67	0402761	2.2	77	0803227	2.2	52	1200819	2.1	13
0100218	2.2	67	0402834	2.2	77	0803278	2.2	52	1200822	2.1	13
0100285	2.2	67	0402842	2.2	77	0803324	2.2	52	1200823	2.1	13
0100374	2.2	67	0402869	2.2	77	0803367	2.2	52	1200826	2.1	13
0100447	2.2	67	0402877	2.2	77	0803405	2.2	52	1200829	2.1	13
0100480	2.2	67	0402885	2.2	77	1000071	2.2	56	1200837	2.1	13
0101079	2.2	67	0402893	2.2	77	1000080	2.2	56	1200850	2.1	13
0101109	2.2	67	0402907	2.2	77	1000098	2.2	56	1202610	2.1	14
0101133	2.2	67	0402915	2.2	77	1000110	2.2	56	1202611	2.1	14
0101150	2.2	67	0402923	2.2	77	1000128	2.2	56	1202612	2.1	14
0101176	2.2	67	0403900	2.2	66	1000136	2.2	56	1202613	2.1	14
0101214	2.2	67	0403901	2.2	66	1000160	2.2	56	1202614	2.1	14
0101281	2.2	67	0403902	2.2	66	1000195	2.2	56	1202630	2.1	14
0101370	2.2	67	0403903	2.2	66	1000209	2.2	56	1202631	2.1	14
0101486	2.2	67	0403904	2.2	66	1000225	2.2	56	1202632	2.1	14
0102075	2.2	67	0403905	2.2	66	1000233	2.2	56	1202633	2.1	14
0102105	2.2	67	0404101	2.2	79	1002015	2.2	54	1202634	2.1	14
0102130	2.2	67	0404128	2.2	79	1002023	2.2	54	1202868	2.1	32
0102156	2.2	67	0404152	2.2	79	1002031	2.2	54	1203070	2.1	17
0102172	2.2	67	0404209	2.2	79	1002040	2.2	54	1203089	2.1	17
0102210	2.2	67	0404250	2.2	79	1002058	2.2	54	1203100	2.1	17
0102288	2.2	67	0404306	2.2	79	1002066	2.2	54	1203126	2.1	17
0102377	2.2	67	0404344	2.2	79	1002074	2.2	54	1203134	2.1	17
0102440	2.2	67	0404350	2.2	79	1002082	2.2	54	1203142	2.1	17
0102482	2.2	67	0404381	2.2	79	1002090	2.2	54	1203177	2.1	17
0102507	2.2	67	0404500	2.2	79	1002104	2.2	54	1203223	2.1	17
0102510	2.2	67	0404756	2.2	79	1100010	2.2	45	1203231	2.1	17
0102513	2.2	67	0405108	2.2	78	1100013	2.2	45	1203266	2.1	17
0102515	2.2	67	0405124	2.2	78	1100014	2.2	45	1203290	2.1	17
0102517	2.2	67	0405159	2.2	78	1100016	2.2	45	1203371	2.1	17
0102521	2.2	67	0405205	2.2	78	1100022	2.2	45	1203509	2.1	17
0102528	2.2	67	0405210	2.2	78	1100030	2.2	45	1203520	2.1	18
0200077	2.2	71	0405344	2.2	78	1100038	2.2	45	1203521	2.1	18
0200107	2.2	71	0405356	2.2	78	1100045	2.2	45	1203522	2.1	18
0200131	2.2	71	0405388	2.2	78	1100050	2.2	45	1203523	2.1	18
0200158	2.2	71	0405507	2.2	78	1200013	2.1	13	1203524	2.1	18
0200174	2.2	71	0405531	2.2	78	1200016	2.1	13	1203525	2.1	18
0200212	2.2	71	0405752	2.2	78	1200021	2.1	13	1203526	2.1	18
0200280	2.2	71	0407100	2.2	80	1200022	2.1	13	1203527	2.1	18
0200379	2.2	71	0407127	2.2	80	1200023	2.1	13	1203528	2.1	18
0200441	2.2	71	0407143	2.2	80	1200029	2.1	13	1203529	2.1	18
0200484	2.2	71	0407208	2.2	80	1200037	2.1	13	1203530	2.1	18
0201078	2.2	71	0407380	2.2	80	1200040	2.1	13	1203531	2.1	18
0201108	2.2	71	0407500	2.2	80	1200041	2.1	13	1203540	2.1	18
0201132	2.2	71	0407755	2.2	80	1200044	2.1	13	1203541	2.1	18
0201159	2.2	71	0408093	2.2	81	1200054	2.1	13	1203542	2.1	18
0201175	2.2	71	0408115	2.2	81	1200061	2.1	13	1203543	2.1	18
0201213	2.2	71	0408166	2.2	81	1200062	2.1	13	1203544	2.1	18
0201281	2.2	71	0408212	2.2	81	1200064	2.1	13	1203545	2.1	18
0201378	2.2	71	0408298	2.2	81	1200066	2.1	13	1203546	2.1	18
0201442	2.2	71	0408360	2.2	81	1200067	2.1	13	1203547	2.1	18
0201485	2.2	71	0408372	2.2	81	1200068	2.1	13	1203548	2.1	18
0300071	2.2	74	0408380	2.2	81	1200069	2.1	13	1203549	2.1	18
0300101	2.2	74	0413012	2.2	83	1200070	2.1	13	1203550	2.1	18
0300136	2.2	74	0413016	2.2	83	1200073	2.1	13	1203551	2.1	18
0300152	2.2	74	0413020	2.2	83	1200089	2.1	13	1203612	2.1	17
0300179	2.2	74	0413026	2.2	83	1200100	2.1	13	1203614	2.1	17

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
1203617	2.1	17	1206260	2.1	17	1210217	2.1	25	1211828	2.1	25
1203623	2.1	17	1206290	2.1	17	1210219	2.1	25	1211829	2.1	25
1203907	2.1	13	1206370	2.1	17	1210222	2.1	25	1211832	2.1	25
1203908	2.1	13	1206508	2.1	17	1210223	2.1	25	1211841	2.1	25
1203910	2.1	13	1206520	2.1	18	1210226	2.1	25	1211842	2.1	25
1203912	2.1	13	1206521	2.1	18	1210229	2.1	25	1211843	2.1	25
1203913	2.1	13	1206522	2.1	18	1210237	2.1	25	1211844	2.1	25
1203914	2.1	13	1206523	2.1	18	1210304	2.1	25	1211845	2.1	25
1203917	2.1	13	1206524	2.1	18	1210307	2.1	25	1212079	2.1	15
1203922	2.1	13	1206525	2.1	18	1210308	2.1	25	1212109	2.1	15
1203923	2.1	13	1206526	2.1	18	1210310	2.1	25	1212125	2.1	15
1203929	2.1	13	1206527	2.1	18	1210313	2.1	25	1212133	2.1	15
1203937	2.1	13	1206528	2.1	18	1210317	2.1	25	1212141	2.1	15
1203950	2.1	13	1206529	2.1	18	1210319	2.1	25	1212160	2.1	15
1203957	2.1	13	1206530	2.1	18	1210322	2.1	25	1212176	2.1	15
1203958	2.1	13	1206531	2.1	18	1210323	2.1	25	1212192	2.1	15
1203960	2.1	13	1206540	2.1	18	1210326	2.1	25	1212222	2.1	15
1203962	2.1	13	1206541	2.1	18	1210329	2.1	25	1212230	2.1	15
1203963	2.1	13	1206542	2.1	18	1210337	2.1	25	1212260	2.1	15
1203964	2.1	13	1206543	2.1	18	1211104	2.1	25	1212290	2.1	15
1203967	2.1	13	1206544	2.1	18	1211106	2.1	25	1212341	2.1	15
1203972	2.1	13	1206545	2.1	18	1211107	2.1	25	1212370	2.1	15
1203973	2.1	13	1206546	2.1	18	1211108	2.1	25	1212508	2.1	15
1203979	2.1	13	1206547	2.1	18	1211111	2.1	25	1212607	2.1	15
1203987	2.1	13	1206548	2.1	18	1211115	2.1	25	1212608	2.1	15
1203990	2.1	13	1206549	2.1	18	1211119	2.1	25	1212610	2.1	15
1205030	2.1	13	1206550	2.1	18	1211126	2.1	25	1212612	2.1	15
1205045	2.1	13	1206551	2.1	18	1211134	2.1	25	1212613	2.1	15
1205060	2.1	13	1206707	2.1	34	1211150	2.1	25	1212614	2.1	15
1205072	2.1	13	1206710	2.1	34	1211151	2.1	25	1212616	2.1	15
1205080	2.1	13	1206713	2.1	34	1211152	2.1	25	1212617	2.1	15
1205102	2.1	13	1206716	2.1	34	1211153	2.1	25	1212619	2.1	15
1205129	2.1	13	1206717	2.1	34	1211155	2.1	25	1212622	2.1	15
1205137	2.1	13	1206722	2.1	34	1211159	2.1	25	1212623	2.1	15
1205145	2.1	13	1206723	2.1	34	1211162	2.1	25	1212626	2.1	15
1205161	2.1	13	1206726	2.1	34	1211165	2.1	25	1212629	2.1	15
1205170	2.1	13	1206729	2.1	34	1211167	2.1	25	1212634	2.1	15
1205196	2.1	13	1206737	2.1	34	1211304	2.1	25	1212637	2.1	15
1205226	2.1	13	1206750	2.1	34	1211306	2.1	25	1212650	2.1	15
1205234	2.1	13	1206770	2.1	34	1211307	2.1	25	1212850	2.1	15
1205269	2.1	13	1206807	2.1	34	1211308	2.1	25	1212919	2.1	15
1205290	2.1	13	1206810	2.1	34	1211311	2.1	25	1212920	2.1	15
1205344	2.1	13	1206813	2.1	34	1211315	2.1	25	1212921	2.1	15
1205374	2.1	13	1206816	2.1	34	1211319	2.1	25	1212923	2.1	15
1205501	2.1	13	1206817	2.1	34	1211326	2.1	25	1212924	2.1	15
1205503	2.1	13	1206822	2.1	34	1211334	2.1	25	1212925	2.1	15
1205504	2.1	13	1206823	2.1	34	1211350	2.1	25	1212926	2.1	15
1205506	2.1	13	1206826	2.1	34	1211351	2.1	25	1212927	2.1	15
1205507	2.1	13	1206829	2.1	34	1211353	2.1	25	1212928	2.1	15
1205508	2.1	13	1206837	2.1	34	1211355	2.1	25	1212929	2.1	15
1205510	2.1	13	1206850	2.1	34	1211359	2.1	25	1212930	2.1	15
1205512	2.1	13	1206870	2.1	34	1211362	2.1	25	1212931	2.1	15
1205513	2.1	13	1210004	2.1	25	1211365	2.1	25	1212932	2.1	15
1205514	2.1	13	1210007	2.1	25	1211367	2.1	25	1213007	2.1	15
1205516	2.1	13	1210008	2.1	25	1211369	2.1	25	1213008	2.1	15
1205517	2.1	13	1210010	2.1	25	1211403	2.1	25	1213010	2.1	15
1205519	2.1	13	1210013	2.1	25	1211405	2.1	25	1213012	2.1	15
1205522	2.1	13	1210017	2.1	25	1211407	2.1	25	1213013	2.1	15
1205523	2.1	13	1210019	2.1	25	1211408	2.1	25	1213014	2.1	15
1205526	2.1	13	1210022	2.1	25	1211409	2.1	25	1213016	2.1	15
1205529	2.1	13	1210023	2.1	25	1211410	2.1	25	1213017	2.1	15
1205534	2.1	13	1210026	2.1	25	1211411	2.1	25	1213019	2.1	15
1205537	2.1	13	1210029	2.1	25	1211412	2.1	25	1213022	2.1	15
1205550	2.1	13	1210037	2.1	25	1211413	2.1	25	1213023	2.1	15
1206003	2.1	17	1210104	2.1	25	1211414	2.1	25	1213026	2.1	15
1206070	2.1	17	1210107	2.1	25	1211415	2.1	25	1213029	2.1	15
1206079	2.1	17	1210108	2.1	25	1211443	2.1	25	1213034	2.1	15
1206085	2.1	17	1210110	2.1	25	1211445	2.1	25	1213037	2.1	15
1206103	2.1	17	1210113	2.1	25	1211447	2.1	25	1213050	2.1	15
1206109	2.1	17	1210117	2.1	25	1211448	2.1	25	1213107	2.1	15
1206110	2.1	17	1210119	2.1	25	1211449	2.1	25	1213108	2.1	15
1206113	2,1	17	1210122	2.1	25	1211450	2.1	25	1213110	2.1	15
1206117	2.1	17	1210123	2.1	25	1211451	2.1	25	1213112	2.1	15
1206125	2.1	17	1210126	2.1	25	1211452	2.1	25	1213113	2.1	15
1206130	2.1	17	1210129	2.1	25	1211453	2.1	25	1213114	2.1	15
1206140	2.1	17	1210137	2.1	25	1211454	2.1	25	1213116	2.1	15
1206160	2.1	17	1210204	2.1	25	1211455	2.1	25	1213117	2.1	15
1206176	2.1	17	1210207	2.1	25	1211808	2.1	25	1213119	2.1	15
1206190	2.1	17	1210208	2.1	25	1211822	2.1	25	1213122	2.1	15
1206220	2.1	17	1210210	2.1	25	1211823	2.1	25	1213123	2.1	15
1206230	2.1	17	1210213	2.1	25	1211826	2.1	25	1213126	2.1	15

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
1213129	2.1	15	1215466	2.1	22	1215937	2.1	22	1223315	2.1	24
1213134	2.1	15	1215469	2.1	22	1215950	2.1	22	1223317	2.1	24
1213137	2.1	15	1215477	2.1	22	1215964	2.1	22	1223319	2.1	24
1213150	2.1	15	1215504	2.1	22	1215966	2.1	22	1223322	2.1	24
1214089	2.1	16	1215506	2.1	22	1215968	2.1	22	1223323	2.1	24
1214100	2.1	16	1215508	2.1	22	1215971	2.1	22	1223326	2.1	24
1214127	2.1	16	1215511	2.1	22	1215975	2.1	22	1223329	2.1	24
1214143	2.1	16	1215515	2.1	22	1215979	2.1	22	1229001	2.1	14
1214178	2.1	16	1215519	2.1	22	1215986	2.1	22	1229002	2.1	14
1214235	2.1	16	1215526	2.1	22	1215994	2.1	22	1229003	2.1	14
1214236	2.1	16	1215534	2.1	22	1219004	2.1	30	1229004	2.1	14
1214291	2.1	16	1215554	2.1	22	1219007	2.1	30	1229005	2.1	14
1214292	2.1	16	1215556	2.1	22	1219008	2.1	30	1229006	2.1	14
1214375	2.1	16	1215558	2.1	22	1219010	2.1	30	1229007	2.1	14
1214376	2.1	16	1215561	2.1	22	1219013	2.1	30	1229008	2.1	14
1214502	2.1	16	1215565	2.1	22	1219014	2.1	30	1229010	2.1	14
1215013	2.1	22	1215569	2.1	22	1219017	2.1	30	1229011	2.1	14
1215019	2.1	22	1215576	2.1	22	1219018	2.1	30	1229012	2.1	14
1215023	2.1	22	1215586	2.1	22	1219019	2.1	30	1229013	2.1	14
1215043	2.1	22	1215704	2.1	22	1219020	2.1	30	1229014	2.1	14
1215060	2.1	22	1215706	2.1	22	1219023	2.1	30	1229015	2.1	14
1215086	2.1	22	1215707	2.1	22	1219029	2.1	30	1229016	2.1	14
1215113	2.1	22	1215708	2.1	22	1219037	2.1	30	1229017	2.1	14
1215116	2.1	22	1215710	2.1	22	1220011	2.1	31	1229019	2.1	14
1215119	2.1	22	1215712	2.1	22	1220013	2.1	31	1229020	2.1	14
1215123	2.1	22	1215713	2.1	22	1220015	2.1	31	1229021	2.1	14
1215124	2.1	22	1215714	2.1	22	1220019	2.1	31	1229022	2.1	14
1215127	2.1	22	1215716	2.1	22	1220026	2.1	31	1229023	2.1	14
1215128	2.1	22	1215717	2.1	22	1223004	2.1	24	1229026	2.1	14
1215130	2.1	22	1215722	2.1	22	1223006	2.1	24	1229029	2.1	14
1215133	2.1	22	1215723	2.1	22	1223007	2.1	24	1229037	2.1	14
1215137	2.1	22	1215726	2.1	22	1223008	2.1	24	1229104	2.1	14
1215139	2.1	22	1215729	2.1	22	1223010	2.1	24	1229107	2.1	14
1215142	2.1	22	1215737	2.1	22	1223012	2.1	24	1229108	2.1	14
1215143	2.1	22	1215750	2.1	22	1223013	2.1	24	1229110	2.1	14
1215146	2.1	22	1215764	2.1	22	1223014	2.1	24	1229113	2.1	14
1215149	2.1	22	1215766	2.1	22	1223015	2.1	24	1229117	2.1	14
1215157	2.1	22	1215767	2.1	22	1223017	2.1	24	1229119	2.1	14
1215159	2.1	22	1215768	2.1	22	1223019	2.1	24	1229122	2.1	14
1215164	2.1	22	1215770	2.1	22	1223022	2.1	24	1229123	2.1	14
1215167	2.1	22	1215772	2.1	22	1223023	2.1	24	1229126	2.1	14
1215168	2.1	22	1215773	2.1	22	1223026	2.1	24	1229129	2.1	14
1215170	2.1	22	1215774	2.1	22	1223029	2.1	24	1229137	2.1	14
1215173	2.1	22	1215776	2.1	22	1223104	2.1	24	1229204	2.1	14
1215177	2.1	22	1215777	2.1	22	1223106	2.1	24	1229207	2.1	14
1215179	2.1	22	1215782	2.1	22	1223107	2.1	24	1229208	2.1	14
1215182	2.1	22	1215783	2.1	22	1223108	2.1	24	1229210	2.1	14
1215183	2.1	22	1215786	2.1	22	1223110	2.1	24	1229213	2.1	14
1215186	2.1	22	1215789	2.1	22	1223112	2.1	24	1229217	2.1	14
1215189	2.1	22	1215790	2.1	22	1223113	2.1	24	1229219	2.1	14
1215191	2.1	22	1215791	2.1	22	1223114	2.1	24	1229222	2.1	14
1215197	2.1	22	1215804	2.1	22	1223115	2.1	24	1229223	2.1	14
1215213	2.1	22	1215806	2.1	22	1223117	2.1	24	1229226	2.1	14
1215219	2.1	22	1215807	2.1	22	1223119	2.1	24	1229229	2.1	14
1215223	2.1	22	1215808	2.1	22	1223122	2.1	24	1229237	2.1	14
1215264	2.1	22	1215810	2.1	22	1223123	2.1	24	1229304	2.1	14
1215313	2.1	22	1215812	2.1	22	1223126	2.1	24	1229307	2.1	14
1215319	2.1	22	1215813	2.1	22	1223129	2.1	24	1229308	2.1	14
1215323	2.1	22	1215814	2.1	22	1223204	2.1	24	1229310	2.1	14
1215345	2.1	22	1215816	2.1	22	1223206	2.1	24	1229313	2.1	14
1215404	2.1	22	1215817	2.1	22	1223207	2.1	24	1229317	2.1	14
1215407	2.1	22	1215822	2.1	22	1223208	2.1	24	1229319	2.1	14
1215408	2.1	22	1215823	2.1	22	1223210	2.1	24	1229322	2.1	14
1215410	2.1	22	1215826	2.1	22	1223212	2.1	24	1229323	2.1	14
1215413	2.1	22	1215829	2.1	22	1223213	2.1	24	1229326	2.1	14
1215417	2.1	22	1215837	2.1	22	1223214	2.1	24	1229329	2.1	14
1215419	2.1	22	1215850	2.1	22	1223215	2.1	24	1229337	2.1	14
1215422	2.1	22	1215904	2.1	22	1223217	2.1	24	1229700	2.1	14
1215423	2.1	22	1215906	2.1	22	1223219	2.1	24	1229701	2.1	14
1215426	2.1	22	1215907	2.1	22	1223222	2.1	24	1229702	2.1	14
1215429	2.1	22	1215908	2.1	22	1223223	2.1	24	1229703	2.1	14
1215437	2.1	22	1215910	2.1	22	1223226	2.1	24	1229704	2.1	14
1215444	2.1	22	1215912	2.1	22	1223229	2.1	24	1229705	2.1	14
1215447	2.1	22	1215913	2.1	22	1223304	2.1	24	1229706	2.1	14
1215448	2.1	22	1215914	2.1	22	1223306	2.1	24	1229707	2.1	14
1215450	2.1	22	1215916	2.1	22	1223307	2.1	24	1229708	2.1	14
1215453	2.1	22	1215917	2.1	22	1223308	2.1	24	1229709	2.1	14
1215457	2.1	22	1215922	2.1	22	1223310	2.1	24	1229710	2.1	14
1215459	2.1	22	1215923	2.1	22	1223312	2.1	24	1229711	2.1	14
1215462	2.1	22	1215926	2.1	22	1223313	2.1	24	1232004	2.1	26
1215463	2.1	22	1215929	2.1	22	1223314	2.1	24	1232006	2.1	26

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
1232007	2.1	26	1250050	2.1	29	1270826	2.1	23	1291306	2.1	28
1232010	2.1	26	1250052	2.1	29	1270829	2.1	23	1291307	2.1	28
1232013	2.1	26	1250053	2.1	29	1270837	2.1	23	1291310	2.1	28
1232014	2.1	26	1250055	2.1	29	1275004	2.1	23	1291314	2.1	28
1232017	2.1	26	1250060	2.1	29	1275006	2.1	23	1291317	2.1	28
1232019	2.1	26	1250062	2.1	29	1275007	2.1	23	1291319	2.1	28
1232104	2.1	26	1250063	2.1	29	1275008	2.1	23	1291322	2.1	28
1232106	2.1	26	1250065	2.1	29	1275010	2.1	23	1291323	2.1	28
1232107	2.1	26	1253270	2.1	29	1275013	2.1	23	1291404	2.1	28
1232110	2.1	26	1253271	2.1	29	1275014	2.1	23	1291406	2.1	28
1232113	2.1	26	1253272	2.1	29	1275017	2.1	23	1291407	2.1	28
1232114	2.1	26	1253274	2.1	29	1275019	2.1	23	1291410	2.1	28
1232117	2.1	26	1253290	2.1	29	1275022	2.1	23	1291413	2.1	28
1232119	2.1	26	1253292	2.1	29	1275023	2.1	23	1291414	2.1	28
1232204	2.1	26	1253295	2.1	29	1275026	2.1	23	1291417	2.1	28
1232206	2.1	26	1253297	2.1	29	1275029	2.1	23	1291419	2.1	28
1232207	2.1	26	1253300	2.1	29	1275037	2.1	23	1291422	2.1	28
1232210	2.1	26	1253302	2.1	29	1275104	2.1	23	1291423	2.1	28
1232213	2.1	26	1253400	2.1	29	1275106	2.1	23	1291513	2.1	28
1232214	2.1	26	1253402	2.1	29	1275107	2.1	23	1291613	2.1	28
1232217	2.1	26	1253450	2.1	29	1275108	2.1	23	1291614	2.1	28
1232219	2.1	26	1253452	2.1	29	1275110	2.1	23	1291617	2.1	28
1232304	2.1	26	1253600	2.1	29	1275114	2.1	23	1293004	2.1	27
1232306	2.1	26	1253602	2.1	29	1275117	2.1	23	1293006	2.1	27
1232307	2.1	26	1253700	2.1	29	1275119	2.1	23	1293007	2.1	27
1232310	2.1	26	1253703	2.1	29	1275122	2.1	23	1293010	2.1	27
1232313	2.1	26	1253750	2.1	29	1275123	2.1	23	1293013	2.1	27
1232314	2.1	26	1253752	2.1	29	1275126	2.1	23	1293014	2.1	27
1232317	2.1	26	1270504	2.1	23	1275129	2.1	23	1293016	2.1	27
1232319	2.1	26	1270506	2.1	23	1275137	2.1	23	1293017	2.1	27
1240040	2.1	10	1270507	2.1	23	1275304	2.1	23	1293019	2.1	27
1240072	2.1	10	1270508	2.1	23	1275306	2.1	23	1293022	2.1	27
1240080	2.1	10	1270510	2.1	23	1275307	2.1	23	1293104	2.1	27
1240102	2.1	10	1270513	2.1	23	1275308	2.1	23	1293106	2.1	27
1240129	2.1	10	1270514	2.1	23	1275310	2.1	23	1293107	2.1	27
1240137	2.1	10	1270517	2.1	23	1275314	2.1	23	1293110	2.1	27
1240145	2.1	10	1270519	2.1	23	1275317	2.1	23	1293113	2.1	27
1240170	2.1	10	1270522	2.1	23	1275319	2.1	23	1293114	2.1	27
1240226	2.1	10	1270523	2.1	23	1275322	2.1	23	1293116	2.1	27
1240234	2.1	10	1270526	2.1	23	1275323	2.1	23	1293117	2.1	27
1240293	2.1	10	1270529	2.1	23	1275326	2.1	23	1293122	2.1	27
1240374	2.1	10	1270537	2.1	23	1275329	2.1	23	1296004	2.1	28
1240501	2.1	10	1270604	2.1	23	1275337	2.1	23	1296006	2.1	28
1240607	2.1	10	1270606	2.1	23	1275404	2.1	23	1296007	2.1	28
1240608	2.1	10	1270607	2.1	23	1275406	2.1	23	1296010	2.1	28
1240610	2.1	10	1270608	2.1	23	1275407	2.1	23	1296013	2.1	28
1240612	2.1	10	1270610	2.1	23	1275408	2.1	23	1296014	2.1	28
1240613	2.1	10	1270613	2.1	23	1275410	2.1	23	1296016	2.1	28
1240614	2.1	10	1270614	2.1	23	1275414	2.1	23	1296017	2.1	28
1240617	2.1	10	1270617	2.1	23	1275417	2.1	23	1296022	2.1	28
1240622	2.1	10	1270619	2.1	23	1275419	2.1	23	1296104	2.1	28
1240623	2.1	10	1270622	2.1	23	1275422	2.1	23	1296106	2.1	28
1240629	2.1	10	1270623	2.1	23	1275423	2.1	23	1296107	2.1	28
1240637	2.1	10	1270626	2.1	23	1275426	2.1	23	1296110	2.1	28
1240650	2.1	10	1270629	2.1	23	1275429	2.1	23	1296113	2.1	28
1245207	2.1	33	1270637	2.1	23	1275437	2.1	23	1296114	2.1	28
1245210	2.1	32	1270704	2.1	23	1290013	2.1	27	1296116	2.1	28
1245210	2.1	33	1270706	2.1	23	1290113	2.1	27	1296117	2.1	28
1245213	2.1	33	1270707	2.1	23	1291004	2.1	28	1296122	2.1	28
1245216	2.1	33	1270708	2.1	23	1291006	2.1	28	1601075	2.2	59
1245217	2.1	33	1270710	2.1	23	1291007	2.1	28	1601105	2.2	59
1245222	2.1	33	1270713	2.1	23	1291010	2.1	28	1601130	2.2	59
1245223	2.1	33	1270714	2.1	23	1291013	2.1	28	1601156	2.2	59
1245226	2.1	33	1270717	2.1	23	1291014	2.1	28	1601172	2.2	59
1245229	2.1	33	1270719	2.1	23	1291017	2.1	28	1601229	2.2	59
1245237	2.1	33	1270722	2.1	23	1291019	2.1	28	1601296	2.2	59
1245250	2.1	33	1270723	2.1	23	1291022	2.1	28	1601385	2.2	59
1245270	2.1	33	1270726	2.1	23	1291023	2.1	28	1601458	2.2	59
1245307	2.1	33	1270729	2.1	23	1291029	2.1	28	1601490	2.2	59
1245310	2.1	32	1270737	2.1	23	1291104	2.1	28	1601600	2.2	59
1245310	2.1	33	1270804	2.1	23	1291106	2.1	28	1601601	2.2	59
1245313	2.1	33	1270806	2.1	23	1291107	2.1	28	1601602	2.2	59
1245316	2.1	33	1270807	2.1	23	1291110	2.1	28	1601603	2.2	59
1245317	2.1	33	1270808	2.1	23	1291113	2.1	28	1601604	2.2	59
1245322	2.1	33	1270810	2.1	23	1291114	2.1	28	1601605	2.2	59
1245323	2.1	33	1270813	2.1	23	1291117	2.1	28	1601606	2.2	59
1245326	2.1	33	1270814	2.1	23	1291119	2.1	28	1601607	2.2	59
1245329	2.1	33	1270817	2.1	23	1291122	2.1	28	1601608	2.2	59
1245337	2.1	33	1270819	2.1	23	1291123	2.1	28	1601609	2.2	59
1245350	2.1	33	1270822	2.1	23	1291129	2.1	28	1602063	2.2	58
1245370	2.1	33	1270823	2.1	23	1291304	2.1	28	1602098	2.2	58

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
1602128	2.2	58	1902606	2.2	53	1926003	2.1	21	1926637	2.1	11
1602144	2.2	58	1902607	2.2	53	1926004	2.1	21	1926650	2.1	11
1602152	2.2	58	1902608	2.2	53	1926006	2.1	21	1926653	2.1	11
1602209	2.2	58	1902609	2.2	53	1926007	2.1	21	1926654	2.1	11
1602276	2.2	58	1902610	2.2	53	1926008	2.1	21	1926656	2.1	11
1602357	2.2	58	1902611	2.2	53	1926023	2.1	21	1926657	2.1	11
1602446	2.2	58	1902612	2.2	53	1926029	2.1	21	1926658	2.1	11
1602600	2.2	58	1902613	2.2	53	1926033	2.1	21	1926660	2.1	11
1602601	2.2	58	1902614	2.2	53	1926039	2.1	21	1926662	2.1	11
1602602	2.2	58	1902615	2.2	53	1926043	2.1	21	1926663	2.1	11
1602603	2.2	58	1902616	2.2	53	1926049	2.1	11	1926664	2.1	11
1602604	2.2	58	1902617	2.2	53	1926053	2.1	11	1926666	2.1	11
1602605	2.2	58	1902618	2.2	53	1926059	2.1	11	1926667	2.1	11
1602606	2.2	58	1902619	2.2	53	1926063	2.1	11	1926669	2.1	11
1602607	2.2	58	1902622	2.2	53	1926073	2.1	11	1926672	2.1	11
1602608	2.2	58	1902628	2.2	53	1926083	2.1	11	1926673	2.1	11
1603600	2.2	60	1902630	2.2	53	1926093	2.1	11	1926676	2.1	11
1603601	2.2	60	1919805	2.1	9	1926098	2.1	21	1926679	2.1	11
1603602	2.2	60	1919806	2.1	9	1926100	2.1	21	1926687	2.1	11
1603603	2.2	60	1919807	2.1	9	1926120	2.1	21	1926690	2.1	11
1603604	2.2	60	1919814	2.1	9	1926130	2.1	21	1927004	2.1	21
1603605	2.2	60	1919815	2.1	9	1926133	2.1	21	1927006	2.1	21
1603606	2.2	60	1919816	2.1	9	1926140	2.1	21	1927008	2.1	21
1603607	2.2	60	1919822	2.1	9	1926157	2.1	21	1927110	2.1	21
1603608	2.2	60	1919830	2.1	9	1926159	2.1	21	1927115	2.1	21
1603609	2.2	60	1919849	2.1	9	1926160	2.1	21	1927119	2.1	21
1603620	2.2	60	1919850	2.1	9	1926166	2.1	21	1927126	2.1	21
1603621	2.2	60	1919857	2.1	9	1926167	2.1	21	1927134	2.1	21
1603622	2.2	60	1919865	2.1	9	1926168	2.1	21	1927304	2.1	21
1603623	2.2	60	1919873	2.1	9	1926169	2.1	21	1927306	2.1	21
1603624	2.2	60	1919890	2.1	9	1926170	2.1	21	1927308	2.1	21
1603625	2.2	60	1919899	2.1	9	1926174	2.1	21	1927311	2.1	21
1603626	2.2	60	1919902	2.1	9	1926177	2.1	21	1927315	2.1	21
1603627	2.2	60	1919903	2.1	9	1926178	2.1	21	1927319	2.1	21
1603628	2.2	60	1919911	2.1	9	1926179	2.1	21	1927326	2.1	21
1603629	2.2	60	1919912	2.1	9	1926180	2.1	21	1927334	2.1	21
1800206	2.2	91	1919913	2.1	9	1926181	2.1	21	1927904	2.1	11
1800208	2.2	91	1919920	2.1	9	1926182	2.1	21	1927906	2.1	11
1800210	2.2	91	1919925	2.1	9	1926190	2.1	21	1927908	2.1	11
1800212	2.2	91	1919938	2.1	9	1926220	2.1	21	1927911	2.1	11
1800215	2.2	91	1919946	2.1	9	1926223	2.1	21	1927915	2.1	11
1800219	2.2	91	1919947	2.1	9	1926225	2.1	21	1927919	2.1	11
1800224	2.2	91	1919954	2.1	9	1926226	2.1	21	1927926	2.1	11
1800256	2.2	91	1919962	2.1	9	1926229	2.1	21	1927934	2.1	11
1800258	2.2	91	1919970	2.1	9	1926237	2.1	21	1927964	2.1	11
1800260	2.2	91	1922007	2.1	35	1926250	2.1	21	1927966	2.1	11
1800262	2.2	91	1922010	2.1	35	1926251	2.1	21	1927968	2.1	11
1800265	2.2	91	1922013	2.1	35	1926303	2.1	21	1927971	2.1	11
1800269	2.2	91	1922016	2.1	35	1926304	2.1	21	1927975	2.1	11
1800274	2.2	91	1922017	2.1	35	1926306	2.1	21	1927979	2.1	11
1880003	2.4	112	1922022	2.1	35	1926307	2.1	21	1927986	2.1	11
1880005	2.4	112	1922023	2.1	35	1926308	2.1	21	1927994	2.1	11
1880007	2.4	112	1922026	2.1	35	1926310	2.1	21	1929004	2.1	19
1880010	2.4	112	1922029	2.1	35	1926312	2.1	21	1929006	2.1	19
1880012	2.4	112	1922037	2.1	35	1926313	2.1	21	1929008	2.1	19
1880014	2.4	112	1922050	2.1	35	1926314	2.1	21	1929011	2.1	19
1880016	2.4	112	1922070	2.1	35	1926316	2.1	21	1929015	2.1	19
1880018	2.4	112	1922307	2.1	36	1926317	2.1	21	1929019	2.1	19
1880020	2.4	112	1922310	2.1	36	1926319	2.1	21	1929026	2.1	19
1881500	2.4	112	1922313	2.1	36	1926322	2.1	21	1929034	2.1	19
1882003	2.4	112	1922316	2.1	36	1926323	2.1	21	1929104	2.1	19
1882005	2.4	112	1922317	2.1	36	1926326	2.1	21	1929106	2.1	19
1882007	2.4	112	1922322	2.1	36	1926329	2.1	21	1929108	2.1	19
1882010	2.4	112	1922323	2.1	36	1926337	2.1	21	1929111	2.1	19
1882012	2.4	112	1922326	2.1	36	1926350	2.1	21	1929115	2.1	19
1882014	2.4	112	1922329	2.1	36	1926603	2.1	11	1929119	2.1	19
1882016	2.4	112	1922337	2.1	36	1926604	2.1	11	1929126	2.1	19
1882018	2.4	112	1922350	2.1	36	1926606	2.1	11	1929134	2.1	19
1882020	2.4	112	1922370	2.1	36	1926607	2.1	11	1929304	2.1	19
1892900	2.4	115	1922407	2.1	35	1926608	2.1	11	1929306	2.1	19
1892901	2.4	115	1922410	2.1	35	1926610	2.1	11	1929308	2.1	19
1894005	2.4	113	1922413	2.1	35	1926612	2.1	11	1929311	2.1	19
1894007	2.4	113	1922416	2.1	35	1926613	2.1	11	1929315	2.1	19
1894010	2.4	113	1922417	2.1	35	1926614	2.1	11	1929319	2.1	19
1894014	2.4	113	1922422	2.1	35	1926616	2.1	11	1929326	2.1	19
1902600	2.2	53	1922423	2.1	35	1926617	2.1	11	1929334	2.1	19
1902601	2.2	53	1922426	2.1	35	1926619	2.1	11	1929404	2.1	19
1902602	2.2	53	1922429	2.1	35	1926622	2.1	11	1929406	2.1	19
1902603	2.2	53	1922437	2.1	35	1926623	2.1	11	1929408	2.1	19
1902604	2.2	53	1922450	2.1	35	1926626	2.1	11	1929411	2.1	19
1902605	2.2	53	1922470	2.1	36	1926629	2.1	11	1929415	2.1	19

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
1929419	2.1	19	1930253	2.1	19	1930863	2.1	12	1949326	2.1	21
1929426	2.1	19	1930263	2.1	19	1930864	2.1	12	1949329	2.1	21
1929434	2.1	19	1930303	2.1	19	1930866	2.1	12	1949337	2.1	21
1929604	2.1	12	1930304	2.1	19	1930867	2.1	12	1949344	2.1	21
1929606	2.1	12	1930306	2.1	19	1930869	2.1	12	1949347	2.1	21
1929608	2.1	12	1930307	2.1	19	1930872	2.1	12	1949348	2.1	21
1929611	2.1	12	1930308	2.1	19	1930873	2.1	12	1949350	2.1	21
1929615	2.1	12	1930310	2.1	19	1930876	2.1	12	1949353	2.1	21
1929619	2.1	12	1930312	2.1	19	1930879	2.1	12	1949357	2.1	21
1929626	2.1	12	1930313	2.1	19	1930887	2.1	12	1949359	2.1	21
1929634	2.1	12	1930314	2.1	19	1930890	2.1	12	1949362	2.1	21
1929653	2.1	12	1930316	2.1	19	1930903	2.1	12	1949363	2.1	21
1929654	2.1	12	1930317	2.1	19	1930904	2.1	12	1949366	2.1	21
1929656	2.1	12	1930319	2.1	19	1930906	2.1	12	1949369	2.1	21
1929658	2.1	12	1930322	2.1	19	1930907	2.1	12	1949377	2.1	21
1929661	2.1	12	1930323	2.1	19	1930908	2.1	12	1949404	2.1	21
1929665	2.1	12	1930326	2.1	19	1930910	2.1	12	1949407	2.1	21
1929669	2.1	12	1930329	2.1	19	1930912	2.1	12	1949408	2.1	21
1929676	2.1	12	1930337	2.1	19	1930913	2.1	12	1949410	2.1	21
1929684	2.1	12	1930339	2.1	19	1930914	2.1	12	1949413	2.1	21
1929703	2.1	12	1930350	2.1	19	1930916	2.1	12	1949417	2.1	21
1929704	2.1	12	1930403	2.1	19	1930917	2.1	12	1949419	2.1	21
1929706	2.1	12	1930404	2.1	19	1930919	2.1	12	1949422	2.1	21
1929708	2.1	12	1930406	2.1	19	1930922	2.1	12	1949423	2.1	21
1929711	2.1	12	1930407	2.1	19	1930923	2.1	12	1949426	2.1	21
1929715	2.1	12	1930408	2.1	19	1930926	2.1	12	1949429	2.1	21
1929719	2.1	12	1930410	2.1	19	1930929	2.1	12	1949437	2.1	21
1929726	2.1	12	1930412	2.1	19	1930937	2.1	12	1950003	2.1	21
1929734	2.1	12	1930413	2.1	19	1930950	2.1	12	1950004	2.1	21
1929754	2.1	12	1930414	2.1	19	1939043	2.1	12	1950006	2.1	21
1929756	2.1	12	1930416	2.1	19	1939053	2.1	12	1950007	2.1	21
1929758	2.1	12	1930417	2.1	19	1939059	2.1	12	1950008	2.1	21
1929761	2.1	12	1930419	2.1	19	1939063	2.1	12	1950010	2.1	21
1929765	2.1	12	1930422	2.1	19	1939069	2.1	12	1950012	2.1	21
1929766	2.1	12	1930423	2.1	19	1939073	2.1	12	1950013	2.1	21
1929769	2.1	12	1930426	2.1	19	1939143	2.1	12	1950014	2.1	21
1929774	2.1	12	1930429	2.1	19	1939149	2.1	12	1950016	2.1	21
1930003	2.1	19	1930437	2.1	19	1939153	2.1	12	1950017	2.1	21
1930004	2.1	19	1930439	2.1	19	1939159	2.1	12	1950019	2.1	21
1930006	2.1	19	1930450	2.1	19	1939163	2.1	12	1950022	2.1	21
1930007	2.1	19	1930503	2.1	12	1939173	2.1	12	1950023	2.1	21
1930008	2.1	19	1930504	2.1	12	1940008	2.1	31	1950026	2.1	21
1930010	2.1	19	1930506	2.1	12	1940011	2.1	31	1950029	2.1	21
1930012	2.1	19	1930507	2.1	12	1940013	2.1	31	1950037	2.1	21
1930013	2.1	19	1930508	2.1	12	1940015	2.1	31	1950050	2.1	21
1930014	2.1	19	1930510	2.1	12	1940019	2.1	31	1950053	2.1	21
1930016	2.1	19	1930512	2.1	12	1940026	2.1	31	1950054	2.1	21
1930017	2.1	19	1930513	2.1	12	1948301	2.1	31	1950055	2.1	21
1930019	2.1	19	1930514	2.1	12	1949004	2.1	21	1950056	2.1	21
1930022	2.1	19	1930516	2.1	12	1949007	2.1	21	1950057	2.1	21
1930023	2.1	19	1930517	2.1	12	1949008	2.1	21	1950058	2.1	21
1930026	2.1	19	1930519	2.1	12	1949010	2.1	21	1950059	2.1	21
1930029	2.1	19	1930522	2.1	12	1949013	2.1	21	1950060	2.1	21
1930037	2.1	19	1930523	2.1	12	1949017	2.1	21	1950061	2.1	21
1930050	2.1	19	1930526	2.1	12	1949019	2.1	21	1950062	2.1	21
1930103	2.1	19	1930529	2.1	12	1949022	2.1	21	1950063	2.1	21
1930104	2.1	19	1930537	2.1	12	1949023	2.1	21	1950064	2.1	21
1930106	2.1	19	1930550	2.1	12	1949026	2.1	21	1950065	2.1	21
1930107	2.1	19	1930804	2.1	12	1949029	2.1	21	1950066	2.1	21
1930108	2.1	19	1930806	2.1	12	1949038	2.1	21	1950067	2.1	21
1930110	2.1	19	1930807	2.1	12	1949204	2.1	21	1950068	2.1	21
1930112	2.1	19	1930808	2.1	12	1949207	2.1	21	1950069	2.1	21
1930113	2.1	19	1930810	2.1	12	1949208	2.1	21	1950070	2.1	21
1930114	2.1	19	1930812	2.1	12	1949210	2.1	21	1950104	2.1	21
1930116	2.1	19	1930813	2.1	12	1949213	2.1	21	1950106	2.1	21
1930117	2.1	19	1930814	2.1	12	1949217	2.1	21	1950108	2.1	21
1930119	2.1	19	1930816	2.1	12	1949219	2.1	21	1950111	2.1	21
1930122	2.1	19	1930817	2.1	12	1949222	2.1	21	1950115	2.1	21
1930123	2.1	19	1930819	2.1	12	1949223	2.1	21	1950119	2.1	21
1930126	2.1	19	1930822	2.1	12	1949226	2.1	21	1950126	2.1	21
1930129	2.1	19	1930823	2.1	12	1949229	2.1	21	1950134	2.1	21
1930133	2.1	19	1930826	2.1	12	1949237	2.1	21	1950704	2.1	21
1930137	2.1	19	1930829	2.1	12	1949304	2.1	21	1950706	2.1	21
1930139	2.1	19	1930837	2.1	12	1949307	2.1	21	1950708	2.1	21
1930143	2.1	19	1930850	2.1	12	1949308	2.1	21	1950711	2.1	21
1930150	2.1	19	1930854	2.1	12	1949310	2.1	21	1950715	2.1	21
1930153	2.1	19	1930856	2.1	12	1949313	2.1	21	1950719	2.1	21
1930163	2.1	19	1930857	2.1	12	1949317	2.1	21	1950726	2.1	21
1930233	2.1	19	1930858	2.1	12	1949319	2.1	21	1950734	2.1	21
1930239	2.1	19	1930860	2.1	12	1949322	2.1	21	1951003	2.1	11
1930243	2.1	19	1930862	2.1	12	1949323	2.1	21	1951004	2.1	11

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
1951006	2.1	11	1951703	2.1	11	1967747	2.1	20	1997160	2.1	20
1951007	2.1	11	1951706	2.1	11	1967748	2.1	20	1997163	2.1	20
1951008	2.1	11	1951709	2.1	11	1967750	2.1	20	1997165	2.1	20
1951010	2.1	11	1951717	2.1	11	1967753	2.1	20	1997169	2.1	20
1951012	2.1	11	1951724	2.1	11	1967757	2.1	20	1997172	2.1	20
1951013	2.1	11	1951727	2.1	11	1967759	2.1	20	1997175	2.1	20
1951014	2.1	11	1951728	2.1	11	1967762	2.1	20	1997178	2.1	20
1951016	2.1	11	1951730	2.1	11	1967763	2.1	20	1997205	2.1	20
1951017	2.1	11	1951733	2.1	11	1967766	2.1	20	1997207	2.1	20
1951019	2.1	11	1951737	2.1	11	1967769	2.1	20	1997210	2.1	20
1951022	2.1	11	1951739	2.1	11	1967777	2.1	20	1997213	2.1	20
1951023	2.1	11	1951742	2.1	11	1967844	2.1	20	1997215	2.1	20
1951026	2.1	11	1951743	2.1	11	1967847	2.1	20	1997219	2.1	20
1951029	2.1	11	1951746	2.1	11	1967848	2.1	20	1997222	2.1	20
1951037	2.1	11	1951749	2.1	11	1967850	2.1	20	1997225	2.1	20
1951050	2.1	11	1951757	2.1	11	1967853	2.1	20	1997228	2.1	20
1951104	2.1	11	1952004	2.1	12	1967857	2.1	20	2000075	2.2	64
1951106	2.1	11	1952007	2.1	12	1967859	2.1	20	2000091	2.2	64
1951108	2.1	11	1952008	2.1	12	1967862	2.1	20	2000113	2.2	64
1951111	2.1	11	1952010	2.1	12	1967863	2.1	20	2000130	2.2	64
1951115	2.1	11	1952013	2.1	12	1967866	2.1	20	2000164	2.2	64
1951119	2.1	11	1952017	2.1	12	1967869	2.1	20	2000210	2.2	64
1951126	2.1	11	1952019	2.1	12	1967877	2.1	20	2000296	2.2	64
1951134	2.1	11	1952022	2.1	12	1967904	2.1	20	2000369	2.2	64
1951139	2.1	11	1952023	2.1	12	1967907	2.1	20	2000423	2.2	64
1951140	2.1	11	1952026	2.1	12	1967908	2.1	20	2000482	2.2	64
1951141	2.1	11	1952029	2.1	12	1967910	2.1	20	2001071	2.2	64
1951142	2.1	11	1952037	2.1	12	1967913	2.1	20	2001098	2.2	64
1951143	2.1	11	1952104	2.1	12	1967917	2.1	20	2001110	2.2	64
1951144	2.1	11	1952107	2.1	12	1967919	2.1	20	2001136	2.2	64
1951145	2.1	11	1952108	2.1	12	1967922	2.1	20	2001160	2.2	64
1951146	2.1	11	1952110	2.1	12	1967923	2.1	20	2001217	2.2	64
1951147	2.1	11	1952113	2.1	12	1967926	2.1	20	2001292	2.2	64
1951148	2.1	11	1952117	2.1	12	1967929	2.1	20	2001365	2.2	64
1951149	2.1	11	1952119	2.1	12	1967937	2.1	20	2001420	2.2	64
1951150	2.1	11	1952122	2.1	12	1967944	2.1	20	2001489	2.2	64
1951151	2.1	11	1952123	2.1	12	1967947	2.1	20	2002078	2.2	64
1951152	2.1	11	1952126	2.1	12	1967948	2.1	20	2002094	2.2	64
1951153	2.1	11	1952129	2.1	12	1967950	2.1	20	2002116	2.2	64
1951154	2.1	11	1952137	2.1	12	1967953	2.1	20	2002132	2.2	64
1951155	2.1	11	1952204	2.1	12	1967957	2.1	20	2002167	2.2	64
1951156	2.1	11	1952207	2.1	12	1967959	2.1	20	2002213	2.2	64
1951160	2.1	11	1952208	2.1	12	1967962	2.1	20	2002299	2.2	64
1951161	2.1	11	1952210	2.1	12	1967963	2.1	20	2002361	2.2	64
1951164	2.1	11	1952213	2.1	12	1967966	2.1	20	2002426	2.2	64
1951165	2.1	11	1952217	2.1	12	1967969	2.1	20	2002485	2.2	64
1951167	2.1	11	1952219	2.1	12	1967977	2.1	20	2003074	2.2	64
1951168	2.1	11	1952222	2.1	12	1974004	2.1	30	2003090	2.2	64
1951172	2.1	11	1952223	2.1	12	1974007	2.1	30	2003112	2.2	64
1951604	2.1	11	1952226	2.1	12	1974008	2.1	30	2003139	2.2	64
1951607	2.1	11	1952229	2.1	12	1974010	2.1	30	2003163	2.2	64
1951608	2.1	11	1952237	2.1	12	1974013	2.1	30	2003210	2.2	64
1951610	2.1	11	1952304	2.1	12	1974014	2.1	30	2003295	2.2	64
1951613	2.1	11	1952307	2.1	12	1974017	2.1	30	2003368	2.2	64
1951617	2.1	11	1952308	2.1	12	1974018	2.1	30	2003422	2.2	64
1951619	2.1	11	1952310	2.1	12	1974020	2.1	30	2003481	2.2	64
1951622	2.1	11	1952313	2.1	12	1974023	2.1	30	2004070	2.2	68
1951623	2.1	11	1952317	2.1	12	1974029	2.1	30	2004097	2.2	68
1951626	2.1	11	1952319	2.1	12	1974037	2.1	30	2004119	2.2	68
1951629	2.1	11	1952322	2.1	12	1974039	2.1	30	2004135	2.2	68
1951637	2.1	11	1952323	2.1	12	1974047	2.1	30	2004160	2.2	68
1951644	2.1	11	1952326	2.1	12	1997005	2.1	20	2004216	2.2	68
1951647	2.1	11	1952329	2.1	12	1997007	2.1	20	2004291	2.2	68
1951648	2.1	11	1952337	2.1	12	1997010	2.1	20	2004364	2.2	68
1951650	2.1	11	1955011	2.1	31	1997013	2.1	20	2004429	2.2	68
1951653	2.1	11	1955015	2.1	31	1997015	2.1	20	2004488	2.2	68
1951657	2.1	11	1955019	2.1	31	1997019	2.1	20	2005077	2.2	68
1951659	2.1	11	1955026	2.1	31	1997022	2.1	20	2005093	2.2	68
1951662	2.1	11	1960000	2.1	30	1997025	2.1	20	2005115	2.2	68
1951663	2.1	11	1960001	2.1	30	1997028	2.1	20	2005131	2.2	68
1951666	2.1	11	1960002	2.1	30	1997105	2.1	20	2005166	2.2	68
1951669	2.1	11	1960003	2.1	30	1997107	2.1	20	2005212	2.2	68
1951677	2.1	11	1960004	2.1	30	1997110	2.1	20	2005298	2.2	68
1951684	2.1	11	1960005	2.1	30	1997113	2.1	20	2005360	2.2	68
1951687	2.1	11	1960007	2.1	30	1997115	2.1	20	2005425	2.2	68
1951688	2.1	11	1960008	2.1	30	1997119	2.1	20	2005484	2.2	68
1951690	2.1	11	1960010	2.1	30	1997122	2.1	20	2006073	2.2	68
1951693	2.1	11	1960013	2.1	30	1997125	2.1	20	2006090	2.2	68
1951697	2.1	11	1960017	2.1	30	1997128	2.1	20	2006111	2.2	68
1951699	2.1	11	1960019	2.1	30	1997155	2.1	20	2006138	2.2	68
1951702	2.1	11	1967744	2.1	20	1997157	2.1	20	2006162	2.2	68

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
2006219	2.2	68	2013428	2.2	75	2036134	2.2	73	2512150	2.2	46
2006294	2.2	68	2013487	2.2	75	2036142	2.2	73	2512156	2.2	46
2006367	2.2	68	2014076	2.2	75	2036150	2.2	73	2609470	2.2	89
2006421	2.2	68	2014092	2.2	75	2036169	2.2	73	2609471	2.2	89
2006480	2.2	68	2014114	2.2	75	2036177	2.2	73	2609473	2.2	89
2007070	2.2	68	2014130	2.2	75	2036185	2.2	73	2609476	2.2	89
2007096	2.2	68	2014165	2.2	75	2037017	2.2	73	2609481	2.2	89
2007118	2.2	68	2014211	2.2	75	2037025	2.2	73	2609489	2.2	89
2007134	2.2	68	2014297	2.2	75	2037033	2.2	73	2609490	2.2	89
2007169	2.2	68	2014360	2.2	75	2037041	2.2	73	2609492	2.2	89
2007215	2.2	68	2014424	2.2	75	2037050	2.2	73	2609498	2.2	89
2007290	2.2	68	2014483	2.2	75	2037068	2.2	73	2609507	2.2	87
2007363	2.2	68	2015072	2.2	75	2037076	2.2	73	2609509	2.2	87
2007428	2.2	68	2015099	2.2	75	2037084	2.2	73	2609511	2.2	87
2007487	2.2	68	2015110	2.2	75	2037092	2.2	73	2609513	2.2	87
2008076	2.2	72	2015137	2.2	75	2037106	2.2	73	2609516	2.2	87
2008092	2.2	72	2015161	2.2	75	2037114	2.2	73	2609521	2.2	87
2008114	2.2	72	2015218	2.2	75	2037122	2.2	73	2609529	2.2	87
2008130	2.2	72	2015293	2.2	75	2037130	2.2	73	2609536	2.2	87
2008165	2.2	72	2015366	2.2	75	2037149	2.2	73	2609542	2.2	87
2008211	2.2	72	2015420	2.2	75	2037157	2.2	73	2609548	2.2	87
2008297	2.2	72	2015480	2.2	75	2037165	2.2	73	2609570	2.2	88
2008360	2.2	72	2015516	2.2	76	2037173	2.2	73	2609571	2.2	88
2008424	2.2	72	2015517	2.2	76	2037181	2.2	73	2609573	2.2	88
2008483	2.2	72	2015520	2.2	76	2051010	2.2	65	2609576	2.2	88
2009072	2.2	72	2015521	2.2	76	2051028	2.2	65	2609581	2.2	88
2009099	2.2	72	2015525	2.2	76	2051036	2.2	65	2609589	2.2	88
2009110	2.2	72	2015532	2.2	76	2051044	2.2	65	2609590	2.2	88
2009137	2.2	72	2015540	2.2	76	2051052	2.2	65	2609592	2.2	88
2009161	2.2	72	2015550	2.2	76	2051060	2.2	65	2609598	2.2	88
2009218	2.2	72	2015563	2.2	76	2051079	2.2	65	2609612	2.2	87
2009293	2.2	72	2034018	2.2	69	2051087	2.2	65	2609615	2.2	87
2009366	2.2	72	2034026	2.2	69	2051095	2.2	65	2609616	2.2	87
2009420	2.2	72	2034034	2.2	69	2051117	2.2	65	2609617	2.2	87
2009480	2.2	72	2034042	2.2	69	2051125	2.2	65	2609620	2.2	87
2010070	2.2	72	2034050	2.2	69	2051133	2.2	65	2609625	2.2	87
2010097	2.2	72	2034069	2.2	69	2051141	2.2	65	2609632	2.2	87
2010119	2.2	72	2034077	2.2	69	2051150	2.2	65	2609640	2.2	87
2010135	2.2	72	2034085	2.2	69	2051168	2.2	65	2609650	2.2	87
2010160	2.2	72	2034093	2.2	69	2051176	2.2	65	2609663	2.2	87
2010216	2.2	72	2034115	2.2	69	2051184	2.2	65	2609664	2.2	87
2010291	2.2	72	2034123	2.2	69	2051192	2.2	65	2609689	2.2	89
2010364	2.2	72	2034130	2.2	69	2052016	2.2	65	2609691	2.2	89
2010429	2.2	72	2034131	2.2	69	2052024	2.2	65	2609692	2.2	89
2010488	2.2	72	2034140	2.2	69	2052032	2.2	65	2609693	2.2	89
2011077	2.2	72	2034158	2.2	69	2052040	2.2	65	2609694	2.2	89
2011093	2.2	72	2034166	2.2	69	2052059	2.2	65	2609695	2.2	89
2011115	2.2	72	2034174	2.2	69	2052067	2.2	65	2609696	2.2	89
2011131	2.2	72	2034182	2.2	69	2052070	2.2	65	2609710	2.2	88
2011166	2.2	72	2034190	2.2	69	2052075	2.2	65	2609711	2.2	88
2011212	2.2	72	2035006	2.2	69	2052083	2.2	65	2609713	2.2	88
2011298	2.2	72	2035014	2.2	69	2052091	2.2	65	2609716	2.2	88
2011360	2.2	72	2035022	2.2	69	2052113	2.2	65	2609721	2.2	88
2011425	2.2	72	2035030	2.2	69	2052121	2.2	65	2609729	2.2	88
2011484	2.2	72	2035049	2.2	69	2052130	2.2	65	2609736	2.2	88
2012073	2.2	75	2035057	2.2	69	2052148	2.2	65	2609742	2.2	88
2012090	2.2	75	2035065	2.2	69	2052156	2.2	65	2609748	2.2	88
2012111	2.2	75	2035073	2.2	69	2052164	2.2	65	2609775	2.2	89
2012138	2.2	75	2035081	2.2	69	2052172	2.2	65	2609776	2.2	89
2012162	2.2	75	2035090	2.2	69	2052180	2.2	65	2609777	2.2	89
2012219	2.2	75	2035103	2.2	69	2052199	2.2	65	2609780	2.2	89
2012294	2.2	75	2035111	2.2	69	2200090	2.2	57	2609784	2.2	89
2012367	2.2	75	2035120	2.2	69	2200112	2.2	57	2609788	2.2	89
2012421	2.2	75	2035138	2.2	69	2200139	2.2	57	2609795	2.2	89
2012480	2.2	75	2035154	2.2	69	2200163	2.2	57	2609815	2.2	88
2012516	2.2	76	2035162	2.2	69	2200210	2.2	57	2609816	2.2	88
2012517	2.2	76	2035170	2.2	69	2200295	2.2	57	2609817	2.2	88
2012520	2.2	76	2035189	2.2	69	2200368	2.2	57	2609820	2.2	88
2012521	2.2	76	2035197	2.2	69	2200516	2.2	57	2609825	2.2	88
2012525	2.2	76	2036010	2.2	73	2200520	2.2	57	2609832	2.2	88
2012540	2.2	76	2036029	2.2	73	2200521	2.2	57	2609840	2.2	88
2012550	2.2	76	2036037	2.2	73	2200525	2.2	57	2609850	2.2	88
2012563	2.2	76	2036045	2.2	73	2200532	2.2	57	2609863	2.2	88
2013070	2.2	75	2036053	2.2	73	2200540	2.2	57	2609879	2.2	89
2013096	2.2	75	2036061	2.2	73	2512112	2.2	46	2609880	2.2	89
2013118	2.2	75	2036070	2.2	73	2512116	2.2	46	2609882	2.2	89
2013134	2.2	75	2036088	2.2	73	2512120	2.2	46	2609885	2.2	89
2013169	2.2	75	2036096	2.2	73	2512121	2.2	46	2609892	2.2	89
2013215	2.2	75	2036100	2.2	73	2512125	2.2	46	2609894	2.2	89
2013290	2.2	75	2036118	2.2	73	2512132	2.2	46	2609895	2.2	89
2013363	2.2	75	2036126	2.2	73	2512140	2.2	46	2609899	2.2	89

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
2609915	2.2	88	3000508	2.2	47	3407609	2.2	61	3805206	2.2	41
2609916	2.2	88	3000516	2.2	47	3407611	2.2	61	3805207	2.2	41
2609917	2.2	88	3000524	2.2	47	3407613	2.2	61	3805211	2.2	41
2609920	2.2	88	3000605	2.2	47	3407616	2.2	61	3805212	2.2	41
2609925	2.2	88	3000613	2.2	47	3407621	2.2	61	3805213	2.2	41
2609932	2.2	88	3000621	2.2	47	3407629	2.2	61	3805214	2.2	41
2609940	2.2	88	3000702	2.2	47	3407636	2.2	61	3805217	2.2	41
2609950	2.2	88	3000800	2.2	47	3407642	2.2	61	3805218	2.2	41
2609951	2.2	88	3003160	2.2	48	3407648	2.2	61	3805219	2.2	41
2609974	2.2	86	3003162	2.2	48	3407707	2.2	62	3805223	2.2	41
2609977	2.2	70	3003163	2.2	48	3407709	2.2	62	3805224	2.2	41
2609978	2.2	70	3003164	2.2	48	3407711	2.2	62	3805225	2.2	41
2609979	2.2	70	3003165	2.2	48	3407713	2.2	62	3805229	2.2	41
2609980	2.2	70	3003167	2.2	48	3407716	2.2	62	3805230	2.2	41
2609981	2.2	70	3003210	2.2	48	3407721	2.2	62	3805231	2.2	41
2609982	2.2	70	3003211	2.2	48	3407729	2.2	62	3805235	2.2	41
2609983	2.2	70	3003212	2.2	48	3407736	2.2	62	3805236	2.2	41
2609984	2.2	70	3003213	2.2	48	3407742	2.2	62	3805237	2.2	41
2609985	2.2	70	3003214	2.2	48	3407748	2.2	62	3805300	2.2	41
2609986	2.2	70	3003224	2.2	48	3805000	2.2	40	3805301	2.2	41
2609987	2.2	70	3003280	2.2	48	3805001	2.2	40	3805305	2.2	41
2609988	2.2	70	3003281	2.2	48	3805002	2.2	40	3805306	2.2	41
2612001	2.2	90	3003282	2.2	48	3805003	2.2	40	3805307	2.2	41
2612002	2.2	90	3003283	2.2	48	3805004	2.2	40	3805311	2.2	41
2612003	2.2	90	3003284	2.2	48	3805005	2.2	40	3805312	2.2	41
2612004	2.2	90	3003285	2.2	48	3805006	2.2	40	3805313	2.2	41
2612005	2.2	90	3003320	2.2	48	3805007	2.2	40	3805314	2.2	41
2612006	2.2	90	3003321	2.2	48	3805008	2.2	40	3805317	2.2	41
2612007	2.2	90	3003322	2.2	48	3805009	2.2	40	3805318	2.2	41
2612008	2.2	90	3003323	2.2	48	3805010	2.2	40	3805319	2.2	41
2612013	2.2	90	3003324	2.2	48	3805011	2.2	40	3805323	2.2	41
2612014	2.2	90	3003400	2.2	48	3805012	2.2	40	3805324	2.2	41
2612015	2.2	90	3003500	2.2	48	3805013	2.2	40	3805325	2.2	41
2612016	2.2	90	3005100	2.2	47	3805014	2.2	40	3805329	2.2	41
2612017	2.2	90	3005119	2.2	47	3805015	2.2	40	3805330	2.2	41
2612018	2.2	90	3005208	2.2	47	3805016	2.2	40	3805331	2.2	41
2612019	2.2	90	3005305	2.2	47	3805017	2.2	40	3805335	2.2	41
2612020	2.2	90	3005313	2.2	47	3805018	2.2	40	3805336	2.2	41
2612023	2.2	90	3005402	2.2	47	3805019	2.2	40	3805337	2.2	41
2612024	2.2	90	3005410	2.2	47	3805020	2.2	40	3805601	2.2	42
2612025	2.2	90	3005429	2.2	47	3805021	2.2	40	3805602	2.2	42
2612026	2.2	90	3005437	2.2	47	3805022	2.2	40	3805603	2.2	42
2612027	2.2	90	3005445	2.2	47	3805023	2.2	40	3805604	2.2	42
2612028	2.2	90	3005500	2.2	47	3805024	2.2	40	3805605	2.2	42
2612029	2.2	90	3005518	2.2	47	3805028	2.2	40	3805606	2.2	42
2612030	2.2	90	3005607	2.2	47	3805037	2.2	40	3805607	2.2	42
2690196	2.2	86	3005615	2.2	47	3805047	2.2	40	3805608	2.2	42
2690200	2.2	86	3005623	2.2	47	3805050	2.2	40	3805621	2.2	42
2690212	2.2	86	3005704	2.2	47	3805064	2.2	40	3805622	2.2	42
2690220	2.2	86	3201072	2.2	51	3805100	2.2	40	3805623	2.2	42
2690235	2.2	86	3201073	2.2	51	3805101	2.2	40	3805624	2.2	42
2690240	2.2	86	3201074	2.2	51	3805102	2.2	40	3805625	2.2	42
2690250	2.2	86	3201075	2.2	51	3805103	2.2	40	3805626	2.2	42
2700077	2.2	55	3201076	2.2	51	3805104	2.2	40	3805627	2.2	42
2700093	2.2	55	3201090	2.2	51	3805105	2.2	40	3805628	2.2	42
2700115	2.2	55	3201112	2.2	51	3805106	2.2	40	3805629	2.2	42
2700131	2.2	55	3201139	2.2	51	3805107	2.2	40	3910001	4.0	6
2700166	2.2	55	3201163	2.2	51	3805108	2.2	40	3910002	4.0	6
2700212	2.2	55	3201210	2.2	51	3805109	2.2	40	3910003	4.0	6
2700298	2.2	55	3201295	2.2	51	3805110	2.2	40	3910004	4.0	6
2700360	2.2	55	3201368	2.2	51	3805111	2.2	40	3910005	4.0	6
2700425	2.2	55	3201481	2.2	51	3805112	2.2	40	3910006	4.0	6
2700484	2.2	55	3206000	2.2	44	3805113	2.2	40	3910007	4.0	6
2700512	2.2	55	3206001	2.2	44	3805114	2.2	40	3910008	4.0	6
2700516	2.2	55	3206002	2.2	44	3805115	2.2	40	3910009	4.0	6
2700517	2.2	55	3206003	2.2	44	3805116	2.2	40	3910010	4.0	6
2700520	2.2	55	3206004	2.2	44	3805117	2.2	40	3910011	4.0	6
2700521	2.2	55	3206005	2.2	44	3805118	2.2	40	3910012	4.0	6
2700525	2.2	55	3206006	2.2	44	3805119	2.2	40	4001001	3.1	49
2700532	2.2	55	3206007	2.2	44	3805120	2.2	40	4001109	3.1	49
2700540	2.2	55	3206052	2.2	44	3805121	2.2	40	4001206	3.1	49
2700550	2.2	55	3206058	2.2	44	3805122	2.2	40	4001303	3.1	49
2700563	2.2	55	3407512	2.2	61	3805123	2.2	40	4001400	3.1	49
3000109	2.2	47	3407516	2.2	61	3805124	2.2	40	4001508	3.1	49
3000117	2.2	47	3407520	2.2	61	3805128	2.2	40	4001559	3.1	49
3000125	2.2	47	3407525	2.2	61	3805137	2.2	40	4001605	3.1	49
3000206	2.2	47	3407532	2.2	61	3805147	2.2	40	4001656	3.1	49
3000303	2.2	47	3407540	2.2	61	3805150	2.2	40	4001702	3.1	49
3000311	2.2	47	3407550	2.2	61	3805200	2.2	41	4009100	3.1	49
3000401	2.2	47	3407563	2.2	61	3805201	2.2	41	4009207	3.1	49
3000419	2.2	47	3407607	2.2	61	3805205	2.2	41	4009304	3.1	49

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
4009401	3.1	49	4107507	3.4	117	4108329	3.4	114	4113279	3.4	134
4009509	3.1	49	4107509	3.4	117	4108336	3.4	114	4113320	3.4	134
4009550	3.1	49	4107511	3.4	117	4108342	3.4	114	4113329	3.4	134
4009606	3.1	49	4107513	3.4	117	4108348	3.4	114	4113330	3.4	134
4009658	3.1	49	4107516	3.4	117	4108400	3.4	114	4113339	3.4	134
4009695	3.1	49	4107521	3.4	117	4108401	3.4	114	4113400	3.4	134
4103312	3.1	50	4107529	3.4	117	4108402	3.4	114	4113409	3.4	134
4103313	3.1	50	4107536	3.4	117	4108403	3.4	114	4113410	3.4	134
4103316	3.1	50	4107542	3.4	117	4108712	3.4	128	4113419	3.4	134
4103317	3.1	50	4107548	3.4	117	4108716	3.4	128	4113500	3.4	134
4103320	3.1	50	4107609	3.4	118	4108720	3.4	128	4113509	3.4	134
4103321	3.1	50	4107611	3.4	118	4108725	3.4	128	4113510	3.4	134
4103325	3.1	50	4107613	3.4	118	4108732	3.4	128	4113519	3.4	134
4103326	3.1	50	4107616	3.4	118	4108740	3.4	128	4113630	3.4	134
4103332	3.1	50	4107621	3.4	118	4108750	3.4	128	4113639	3.4	134
4103333	3.1	50	4107629	3.4	118	4108763	3.4	128	4113640	3.4	134
4103340	3.1	50	4107709	3.4	118	4111120	3.4	131	4113649	3.4	134
4103341	3.1	50	4107711	3.4	118	4111129	3.4	131	4113750	3.4	134
4103350	3.1	50	4107713	3.4	118	4111150	3.4	131	4113759	3.4	134
4103351	3.1	50	4107716	3.4	118	4111159	3.4	131	4113760	3.4	134
4103363	3.1	50	4107721	3.4	118	4111160	3.4	131	4113769	3.4	134
4103364	3.1	50	4107729	3.4	118	4111169	3.4	131	4113800	3.4	134
4103512	3.1	50	4107800	3.4	120	4111200	3.4	131	4113809	3.4	134
4103516	3.1	50	4107801	3.4	120	4111209	3.4	131	4113810	3.4	134
4103520	3.1	50	4107802	3.4	120	4111210	3.4	131	4113819	3.4	134
4103521	3.1	50	4107803	3.4	120	4111219	3.4	131	4113900	3.4	134
4103525	3.1	50	4107804	3.4	120	4111250	3.4	131	4113909	3.4	134
4103532	3.1	50	4107805	3.4	120	4111259	3.4	131	4113910	3.4	134
4103540	3.1	50	4107806	3.4	120	4111260	3.4	131	4113919	3.4	134
4103550	3.1	50	4107807	3.4	120	4111269	3.4	131	4113990	3.4	134
4103563	3.1	50	4107809	3.4	120	4111270	3.4	131	4113999	3.4	134
4107012	3.4	115	4107810	3.4	120	4111279	3.4	131	4114120	3.4	137
4107016	3.4	115	4107811	3.4	120	4111320	3.4	131	4114129	3.4	137
4107017	3.4	115	4107812	3.4	120	4111329	3.4	131	4114160	3.4	137
4107020	3.4	115	4107901	3.4	119	4111330	3.4	131	4114169	3.4	137
4107021	3.4	115	4107902	3.4	119	4111339	3.4	131	4114170	3.4	137
4107025	3.4	115	4107903	3.4	119	4111400	3.4	131	4114179	3.4	137
4107026	3.4	115	4107904	3.4	119	4111409	3.4	131	4114200	3.4	137
4107032	3.4	115	4107905	3.4	119	4111410	3.4	131	4114209	3.4	137
4107033	3.4	115	4107906	3.4	119	4111419	3.4	131	4114210	3.4	137
4107040	3.4	115	4107907	3.4	119	4111500	3.4	131	4114219	3.4	137
4107050	3.4	115	4107908	3.4	119	4111509	3.4	131	4114220	3.4	137
4107063	3.4	115	4107909	3.4	119	4111510	3.4	131	4114229	3.4	137
4107112	3.4	115	4107910	3.4	119	4111519	3.4	131	4114250	3.4	137
4107116	3.4	115	4107911	3.4	119	4111630	3.4	131	4114259	3.4	137
4107117	3.4	115	4107912	3.4	119	4111639	3.4	131	4114260	3.4	137
4107120	3.4	115	4107913	3.4	119	4111640	3.4	131	4114269	3.4	137
4107121	3.4	115	4107914	3.4	119	4111649	3.4	131	4114270	3.4	137
4107125	3.4	115	4107915	3.4	119	4111750	3.4	131	4114279	3.4	137
4107126	3.4	115	4108012	3.4	113	4111759	3.4	131	4114320	3.4	137
4107132	3.4	115	4108016	3.4	113	4111760	3.4	131	4114329	3.4	137
4107133	3.4	115	4108020	3.4	113	4111769	3.4	131	4114330	3.4	137
4107140	3.4	115	4108025	3.4	113	4111800	3.4	131	4114339	3.4	137
4107150	3.4	115	4108032	3.4	113	4111809	3.4	131	4114400	3.4	137
4107163	3.4	115	4108040	3.4	113	4111810	3.4	131	4114409	3.4	137
4107216	3.4	116	4108050	3.4	113	4111819	3.4	131	4114410	3.4	137
4107220	3.4	116	4108063	3.4	113	4111900	3.4	131	4114419	3.4	137
4107221	3.4	116	4108112	3.4	113	4111909	3.4	131	4114500	3.4	137
4107225	3.4	116	4108116	3.4	113	4111910	3.4	131	4114509	3.4	137
4107226	3.4	116	4108120	3.4	113	4111919	3.4	131	4114510	3.4	137
4107232	3.4	116	4108125	3.4	113	4111980	3.4	131	4114519	3.4	137
4107233	3.4	116	4108132	3.4	113	4111989	3.4	131	4114630	3.4	137
4107240	3.4	116	4108140	3.4	113	4111990	3.4	131	4114639	3.4	137
4107316	3.4	116	4108150	3.4	113	4111999	3.4	131	4114640	3.4	137
4107320	3.4	116	4108163	3.4	113	4113120	3.4	134	4114649	3.4	137
4107321	3.4	116	4108207	3.4	114	4113129	3.4	134	4114750	3.4	137
4107325	3.4	116	4108209	3.4	114	4113160	3.4	134	4114759	3.4	137
4107326	3.4	116	4108211	3.4	114	4113169	3.4	134	4114760	3.4	137
4107332	3.4	116	4108213	3.4	114	4113170	3.4	134	4114769	3.4	137
4107333	3.4	116	4108216	3.4	114	4113179	3.4	134	4114800	3.4	137
4107340	3.4	116	4108221	3.4	114	4113200	3.4	134	4114809	3.4	137
4107407	3.4	117	4108229	3.4	114	4113209	3.4	134	4114810	3.4	137
4107409	3.4	117	4108236	3.4	114	4113210	3.4	134	4114819	3.4	137
4107411	3.4	117	4108242	3.4	114	4113219	3.4	134	4114900	3.4	137
4107413	3.4	117	4108248	3.4	114	4113220	3.4	134	4114909	3.4	137
4107416	3.4	117	4108307	3.4	114	4113229	3.4	134	4114910	3.4	137
4107421	3.4	117	4108309	3.4	114	4113250	3.4	134	4114919	3.4	137
4107429	3.4	117	4108311	3.4	114	4113259	3.4	134	4114990	3.4	137
4107436	3.4	117	4108313	3.4	114	4113260	3.4	134	4114999	3.4	137
4107442	3.4	117	4108316	3.4	114	4113269	3.4	134	4117209	3.4	137
4107448	3.4	117	4108321	3.4	114	4113270	3.4	134	4121070	3.4	132

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
4121079	3.4	132	4124130	3.4	138	4133069	3.4	136	4200098	3.1	38
4121090	3.4	132	4124139	3.4	138	4133100	3.4	136	4200101	3.1	38
4121099	3.4	132	4124140	3.4	138	4133109	3.4	136	4200102	3.1	38
4121110	3.4	132	4124149	3.4	138	4133110	3.4	136	4200110	3.1	38
4121119	3.4	132	4124160	3.4	138	4133119	3.4	136	4200128	3.1	38
4121130	3.4	132	4124169	3.4	138	4133120	3.4	136	4200136	3.1	38
4121139	3.4	132	4124170	3.4	138	4133129	3.4	136	4200143	3.1	38
4121140	3.4	132	4124179	3.4	138	4133200	3.4	136	4200144	3.1	38
4121149	3.4	132	4124210	3.4	138	4133209	3.4	136	4200152	3.1	38
4121160	3.4	132	4124219	3.4	138	4133210	3.4	136	4200160	3.1	38
4121169	3.4	132	4124290	3.4	138	4133219	3.4	136	4200178	3.1	38
4121210	3.4	132	4124299	3.4	138	4133220	3.4	136	4200179	3.1	38
4121219	3.4	132	4124300	3.4	138	4133229	3.4	136	4200186	3.1	38
4121290	3.4	132	4124309	3.4	138	4133300	3.4	136	4200187	3.1	38
4121299	3.4	132	4124360	3.4	138	4133309	3.4	136	4200195	3.1	38
4121300	3.4	132	4124369	3.4	138	4133310	3.4	136	4200196	3.1	38
4121309	3.4	132	4124370	3.4	138	4133319	3.4	136	4200217	3.1	38
4121360	3.4	132	4124379	3.4	138	4133340	3.4	136	4200292	3.1	38
4121369	3.4	132	4124420	3.4	138	4133349	3.4	136	4200365	3.1	38
4121370	3.4	132	4124429	3.4	138	4133350	3.4	136	4200420	3.1	38
4121379	3.4	132	4124480	3.4	138	4133359	3.4	136	4200489	3.1	38
4121420	3.4	132	4124489	3.4	138	4133360	3.4	136	4200500	3.1	38
4121429	3.4	132	4124500	3.4	138	4133369	3.4	136	4200537	3.1	38
4121480	3.4	132	4124509	3.4	138	4133370	3.4	136	4200750	3.1	39
4121489	3.4	132	4124510	3.4	138	4133379	3.4	136	4200751	3.1	39
4121500	3.4	132	4124519	3.4	138	4133400	3.4	136	4200752	3.1	39
4121509	3.4	132	4124530	3.4	138	4133409	3.4	136	4200760	3.1	39
4121530	3.4	132	4124539	3.4	138	4133410	3.4	136	4200761	3.1	39
4121539	3.4	132	4124540	3.4	138	4133419	3.4	136	4200762	3.1	39
4121540	3.4	132	4124549	3.4	138	4133450	3.4	136	4200763	3.1	39
4121549	3.4	132	4131020	3.4	133	4133459	3.4	136	4200764	3.1	39
4121550	3.4	132	4131029	3.4	133	4133460	3.4	136	4200770	3.1	39
4121559	3.4	132	4131030	3.4	133	4133469	3.4	136	4200771	3.1	39
4121560	3.4	132	4131039	3.4	133	4133500	3.4	136	4200772	3.1	39
4121569	3.4	132	4131040	3.4	133	4133509	3.4	136	4200773	3.1	39
4123070	3.4	135	4131049	3.4	133	4133510	3.4	136	4200780	3.1	39
4123079	3.4	135	4131050	3.4	133	4133519	3.4	136	4200781	3.1	39
4123090	3.4	135	4131059	3.4	133	4134050	3.4	139	4200782	3.1	39
4123099	3.4	135	4131100	3.4	133	4134059	3.4	139	4200790	3.1	39
4123100	3.4	135	4131109	3.4	133	4134060	3.4	139	4200794	3.1	39
4123109	3.4	135	4131110	3.4	133	4134069	3.4	139	4200795	3.1	39
4123110	3.4	135	4131119	3.4	133	4134100	3.4	139	4200796	3.1	39
4123119	3.4	135	4131200	3.4	133	4134109	3.4	139	4200800	3.1	40
4123120	3.4	135	4131209	3.4	133	4134110	3.4	139	4200801	3.1	40
4123129	3.4	135	4131210	3.4	133	4134119	3.4	139	4200802	3.1	40
4123130	3.4	135	4131219	3.4	133	4134120	3.4	139	4200810	3.1	40
4123139	3.4	135	4131220	3.4	133	4134129	3.4	139	4200811	3.1	40
4123140	3.4	135	4131229	3.4	133	4134200	3.4	139	4200812	3.1	40
4123149	3.4	135	4131300	3.4	133	4134209	3.4	139	4200813	3.1	40
4123160	3.4	135	4131309	3.4	133	4134210	3.4	139	4200814	3.1	40
4123169	3.4	135	4131310	3.4	133	4134219	3.4	139	4200820	3.1	40
4123170	3.4	135	4131319	3.4	133	4134220	3.4	139	4200821	3.1	40
4123179	3.4	135	4131340	3.4	133	4134229	3.4	139	4200822	3.1	40
4123210	3.4	135	4131349	3.4	133	4134300	3.4	139	4200830	3.1	40
4123219	3.4	135	4131350	3.4	133	4134309	3.4	139	4200831	3.1	40
4123290	3.4	135	4131359	3.4	133	4134310	3.4	139	4200832	3.1	40
4123299	3.4	135	4131360	3.4	133	4134319	3.4	139	4200833	3.1	40
4123300	3.4	135	4131369	3.4	133	4134340	3.4	139	4200835	3.1	40
4123309	3.4	135	4131370	3.4	133	4134349	3.4	139	4200836	3.1	40
4123360	3.4	135	4131379	3.4	133	4134350	3.4	139	4200837	3.1	40
4123369	3.4	135	4131400	3.4	133	4134359	3.4	139	4200840	3.1	40
4123370	3.4	135	4131409	3.4	133	4134360	3.4	139	4220307	3.1	11
4123379	3.4	135	4131410	3.4	133	4134369	3.4	139	4220309	3.1	11
4123420	3.4	135	4131419	3.4	133	4134370	3.4	139	4220311	3.1	11
4123429	3.4	135	4131450	3.4	133	4134379	3.4	139	4220313	3.1	11
4123480	3.4	135	4131459	3.4	133	4134400	3.4	139	4220316	3.1	11
4123489	3.4	135	4131460	3.4	133	4134409	3.4	139	4220321	3.1	11
4123510	3.4	135	4131469	3.4	133	4134410	3.4	139	4220329	3.1	11
4123519	3.4	135	4131500	3.4	133	4134419	3.4	139	4220336	3.1	11
4123530	3.4	135	4131509	3.4	133	4134450	3.4	139	4220342	3.1	11
4123539	3.4	135	4131510	3.4	133	4134459	3.4	139	4220348	3.1	11
4123540	3.4	135	4131519	3.4	133	4134460	3.4	139	4220351	3.1	11
4123549	3.4	135	4131550	3.4	133	4134469	3.4	139	4220352	3.1	11
4124090	3.4	138	4131559	3.4	133	4134500	3.4	139	4220353	3.1	11
4124099	3.4	138	4131560	3.4	133	4134509	3.4	139	4220354	3.1	11
4124100	3.4	138	4131569	3.4	133	4134510	3.4	139	4220355	3.1	11
4124109	3.4	138	4133010	3.4	136	4134519	3.4	139	4220356	3.1	11
4124110	3.4	138	4133019	3.4	136	4200055	3.1	38	4220357	3.1	11
4124119	3.4	138	4133050	3.4	136	4200056	3.1	38	4220358	3.1	11
4124120	3.4	138	4133059	3.4	136	4200071	3.1	38	4220359	3.1	11
4124129	3.4	138	4133060	3.4	136	4200080	3.1	38	4220360	3.1	11

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
4220407	3.1	12	4220955	3.2	55	4222505	3.4	129	4224620	3.1	31
4220409	3.1	12	4220956	3.2	55	4222506	3.4	129	4224621	3.1	31
4220411	3.1	12	4220957	3.2	55	4222507	3.4	129	4224622	3.1	31
4220413	3.1	12	4220958	3.2	55	4222508	3.4	129	4224626	3.1	31
4220416	3.1	12	4220959	3.2	55	4222509	3.4	129	4224627	3.1	31
4220421	3.1	12	4220960	3.2	55	4222510	3.4	129	4224651	3.1	31
4220429	3.1	12	4220961	3.2	55	4222511	3.4	129	4224655	3.1	31
4220436	3.1	12	4220962	3.2	55	4222512	3.4	129	4224675	3.1	31
4220442	3.1	12	4220963	3.2	55	4222521	3.4	130	4224676	3.1	31
4220448	3.1	12	4220964	3.2	55	4222522	3.4	130	4224680	3.1	31
4220451	3.1	12	4220965	3.2	55	4222523	3.4	130	4224681	3.1	31
4220452	3.1	12	4221079	3.1	28	4222524	3.4	130	4224682	3.1	31
4220453	3.1	12	4221095	3.1	28	4222525	3.4	130	4224683	3.1	31
4220454	3.1	12	4221117	3.1	28	4222526	3.4	130	4224684	3.1	31
4220455	3.1	12	4221133	3.1	28	4222527	3.4	130	4224685	3.1	31
4220456	3.1	12	4221168	3.1	28	4222528	3.4	130	4224686	3.1	31
4220457	3.1	12	4221214	3.1	28	4222529	3.4	130	4224687	3.1	31
4220458	3.1	12	4221290	3.1	28	4222530	3.4	130	4224690	3.1	31
4220459	3.1	12	4221362	3.1	28	4224300	3.1	30	4224700	3.1	31
4220460	3.1	12	4221427	3.1	28	4224305	3.1	30	4224705	3.1	31
4220612	3.1	13	4221486	3.1	28	4224306	3.1	30	4224706	3.1	31
4220616	3.1	13	4221507	3.1	28	4224307	3.1	30	4224707	3.1	31
4220620	3.1	13	4221509	3.1	28	4224310	3.1	30	4224710	3.1	31
4220625	3.1	13	4221511	3.1	28	4224311	3.1	30	4224711	3.1	31
4220632	3.1	13	4221513	3.1	28	4224315	3.1	30	4224715	3.1	31
4220640	3.1	13	4221516	3.1	28	4224316	3.1	30	4224716	3.1	31
4220650	3.1	13	4221521	3.1	28	4224317	3.1	30	4224717	3.1	31
4220663	3.1	13	4221529	3.1	28	4224320	3.1	30	4224720	3.1	31
4220670	3.1	14	4221536	3.1	28	4224321	3.1	30	4224721	3.1	31
4220671	3.1	14	4221542	3.1	28	4224322	3.1	30	4224722	3.1	31
4220673	3.1	14	4221548	3.1	28	4224326	3.1	30	4224726	3.1	31
4220675	3.1	14	4221712	3.1	29	4224327	3.1	30	4224727	3.1	31
4220677	3.1	14	4221714	3.1	29	4224351	3.1	30	4224751	3.1	31
4220678	3.1	14	4221716	3.1	29	4224355	3.1	30	4224755	3.1	31
4220679	3.1	14	4221717	3.1	29	4224375	3.1	30	4224775	3.1	31
4220680	3.1	14	4221718	3.1	29	4224376	3.1	30	4224776	3.1	31
4220712	3.1	13	4221719	3.1	29	4224380	3.1	30	4224780	3.1	31
4220716	3.1	13	4221720	3.1	29	4224381	3.1	30	4224781	3.1	31
4220720	3.1	13	4221721	3.1	29	4224382	3.1	30	4224782	3.1	31
4220725	3.1	13	4221722	3.1	29	4224383	3.1	30	4224783	3.1	31
4220732	3.1	13	4221723	3.1	29	4224384	3.1	30	4224784	3.1	31
4220740	3.1	13	4221725	3.1	29	4224385	3.1	30	4224785	3.1	31
4220750	3.1	13	4221726	3.1	29	4224386	3.1	30	4224786	3.1	31
4220763	3.1	13	4221727	3.1	29	4224387	3.1	30	4224787	3.1	31
4220770	3.1	14	4221728	3.1	29	4224390	3.1	30	4224790	3.1	31
4220771	3.1	14	4221732	3.1	29	4224450	3.1	30	4224801	3.4	123
4220773	3.1	14	4221733	3.1	29	4224455	3.1	30	4224802	3.4	123
4220775	3.1	14	4221734	3.1	29	4224456	3.1	30	4224803	3.4	123
4220777	3.1	14	4221735	3.1	29	4224457	3.1	30	4224804	3.4	123
4220778	3.1	14	4221740	3.1	29	4224460	3.1	30	4224805	3.4	123
4220779	3.1	14	4221741	3.1	29	4224461	3.1	30	4224806	3.4	123
4220780	3.1	14	4221750	3.1	29	4224465	3.1	30	4224807	3.4	123
4220800	3.1	15	4221751	3.1	29	4224466	3.1	30	4224808	3.4	123
4220801	3.1	15	4221760	3.1	29	4224467	3.1	30	4224809	3.4	123
4220802	3.1	15	4221761	3.1	29	4224480	3.1	30	4224810	3.4	123
4220803	3.1	15	4222012	3.1	36	4224481	3.1	30	4224811	3.4	123
4220810	3.1	15	4222016	3.1	36	4224482	3.1	30	4224812	3.4	123
4220811	3.1	15	4222017	3.1	36	4224506	3.1	30	4224813	3.4	123
4220812	3.1	15	4222020	3.1	36	4224507	3.1	30	4224814	3.4	123
4220813	3.1	15	4222021	3.1	36	4224551	3.1	30	4224815	3.4	123
4220850	3.1	16	4222025	3.1	36	4224555	3.1	30	4224816	3.4	123
4220851	3.1	16	4222026	3.1	36	4224575	3.1	30	4224817	3.4	123
4220852	3.1	16	4222033	3.1	36	4224576	3.1	30	4224818	3.4	123
4220853	3.1	16	4222034	3.1	36	4224580	3.1	30	4224819	3.4	123
4220854	3.1	16	4222041	3.1	36	4224581	3.1	30	4224820	3.4	123
4220855	3.1	16	4222050	3.1	36	4224582	3.1	30	4224821	3.4	123
4220856	3.1	16	4222063	3.1	36	4224583	3.1	30	4224822	3.4	123
4220857	3.1	16	4222075	3.1	36	4224584	3.1	30	4224823	3.4	123
4220860	3.1	16	4222091	3.1	36	4224585	3.1	30	4224824	3.4	123
4220861	3.1	16	4222113	3.1	36	4224586	3.1	30	4224825	3.4	123
4220862	3.1	16	4222130	3.1	36	4224587	3.1	30	4224826	3.4	123
4220863	3.1	16	4222164	3.1	36	4224590	3.1	30	4224827	3.4	123
4220864	3.1	16	4222210	3.1	36	4224600	3.1	31	4224860	3.4	121
4220865	3.1	16	4222296	3.1	36	4224605	3.1	31	4224861	3.4	121
4220866	3.1	16	4222369	3.1	36	4224606	3.1	31	4224862	3.4	121
4220867	3.1	16	4222423	3.1	36	4224607	3.1	31	4224863	3.4	121
4220950	3.2	55	4222482	3.1	36	4224610	3.1	31	4224864	3.4	121
4220951	3.2	55	4222501	3.4	129	4224611	3.1	31	4224865	3.4	121
4220952	3.2	55	4222502	3.4	129	4224615	3.1	31	4224866	3.4	121
4220953	3.2	55	4222503	3.4	129	4224616	3.1	31	4224867	3.4	121
4220954	3.2	55	4222504	3.4	129	4224617	3.1	31	4224868	3.4	121

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
4224869	3.4	121	4247636	3.4	126	4247842	3.4	124	4248629	3.1	33
4224870	3.4	121	4247637	3.4	126	4247843	3.4	124	4248631	3.1	33
4224871	3.4	121	4247638	3.4	127	4247844	3.4	124	4248632	3.1	33
4224872	3.4	121	4247639	3.4	127	4247845	3.4	124	4248634	3.1	33
4224873	3.4	121	4247640	3.4	127	4247846	3.4	124	4248640	3.1	32
4224874	3.4	121	4247641	3.4	127	4247847	3.4	124	4248641	3.1	32
4224875	3.4	121	4247642	3.4	127	4247848	3.4	124	4248642	3.1	32
4224876	3.4	121	4247643	3.4	127	4247849	3.4	124	4248643	3.1	32
4224877	3.4	121	4247644	3.4	127	4247850	3.4	124	4248644	3.1	32
4224878	3.4	121	4247645	3.4	127	4247851	3.4	124	4248645	3.1	32
4224879	3.4	121	4247646	3.4	127	4247852	3.4	124	4248646	3.1	32
4224880	3.4	121	4247647	3.4	127	4247853	3.4	124	4248647	3.1	32
4224881	3.4	121	4247648	3.4	127	4247854	3.4	124	4248648	3.1	32
4224882	3.4	121	4247649	3.4	127	4247855	3.4	124	4248649	3.1	32
4224883	3.4	121	4247650	3.4	127	4247856	3.4	124	4248650	3.1	32
4224884	3.4	121	4247651	3.4	127	4247857	3.4	124	4248651	3.1	32
4224885	3.4	121	4247652	3.4	127	4247858	3.4	124	4248652	3.1	32
4224886	3.4	121	4247653	3.4	127	4247859	3.4	124	4248653	3.1	32
4224890	3.4	122	4247654	3.4	127	4247860	3.4	124	4248654	3.1	32
4224891	3.4	122	4247655	3.4	127	4247861	3.4	124	4248655	3.1	32
4224892	3.4	122	4247656	3.4	127	4247862	3.4	124	4248656	3.1	32
4224893	3.4	122	4247657	3.4	127	4247863	3.4	124	4248657	3.1	32
4224894	3.4	122	4247658	3.4	127	4247864	3.4	124	4248658	3.1	32
4224895	3.4	122	4247659	3.4	127	4247865	3.4	124	4248659	3.1	32
4224896	3.4	122	4247660	3.4	127	4247866	3.4	124	4248660	3.1	32
4224897	3.4	122	4247661	3.4	127	4247867	3.4	124	4248661	3.1	32
4224898	3.4	122	4247662	3.4	127	4247868	3.4	125	4248662	3.1	32
4224899	3.4	122	4247663	3.4	127	4247869	3.4	125	4248663	3.1	32
4224900	3.4	122	4247664	3.4	127	4247870	3.4	125	4248664	3.1	32
4224901	3.4	122	4247665	3.4	127	4247871	3.4	125	4248665	3.1	32
4224902	3.4	122	4247666	3.4	127	4247872	3.4	125	4248666	3.1	32
4224903	3.4	122	4247667	3.4	127	4247873	3.4	125	4248667	3.1	32
4224904	3.4	122	4247668	3.4	127	4247874	3.4	125	4248668	3.1	32
4224905	3.4	122	4247669	3.4	127	4247875	3.4	125	4248669	3.1	32
4224906	3.4	122	4247670	3.4	127	4247876	3.4	125	4248670	3.1	32
4224907	3.4	122	4247671	3.4	127	4247877	3.4	125	4248671	3.1	32
4224908	3.4	122	4247672	3.4	127	4247878	3.4	125	4248672	3.1	32
4224909	3.4	122	4247673	3.4	127	4247879	3.4	125	4248673	3.1	32
4224910	3.4	122	4247674	3.4	127	4247880	3.4	125	4248674	3.1	32
4224911	3.4	122	4247675	3.4	127	4247881	3.4	125	4248675	3.1	32
4224912	3.4	122	4247676	3.4	127	4247882	3.4	125	4248677	3.1	33
4224913	3.4	122	4247677	3.4	127	4247883	3.4	125	4248678	3.1	33
4224914	3.4	122	4247678	3.4	127	4247884	3.4	125	4248679	3.1	33
4224915	3.4	122	4247679	3.4	127	4247885	3.4	125	4248680	3.1	33
4224916	3.4	122	4247680	3.4	127	4247886	3.4	125	4248681	3.1	33
4247600	3.4	126	4247681	3.4	127	4247887	3.4	125	4248682	3.1	33
4247601	3.4	126	4247682	3.4	127	4247888	3.4	125	4248683	3.1	33
4247602	3.4	126	4247683	3.4	127	4247889	3.4	125	4248684	3.1	33
4247603	3.4	126	4247684	3.4	127	4247890	3.4	125	4248685	3.1	33
4247604	3.4	126	4247685	3.4	127	4247891	3.4	125	4248686	3.1	33
4247605	3.4	126	4247686	3.4	127	4247892	3.4	125	4248687	3.1	33
4247606	3.4	126	4247687	3.4	127	4247893	3.4	125	4248688	3.1	33
4247607	3.4	126	4247688	3.4	127	4247894	3.4	125	4248689	3.1	33
4247608	3.4	126	4247689	3.4	127	4247895	3.4	125	4248690	3.1	33
4247609	3.4	126	4247690	3.4	127	4247896	3.4	125	4248691	3.1	33
4247610	3.4	126	4247691	3.4	127	4247897	3.4	125	4248692	3.1	33
4247611	3.4	126	4247692	3.4	127	4247898	3.4	125	4248693	3.1	33
4247612	3.4	126	4247693	3.4	127	4247899	3.4	125	4248694	3.1	33
4247613	3.4	126	4247694	3.4	127	4247900	3.4	125	4248695	3.1	33
4247614	3.4	126	4247695	3.4	127	4247901	3.4	125	4248696	3.1	33
4247615	3.4	126	4247696	3.4	127	4247902	3.4	125	4248697	3.1	33
4247616	3.4	126	4247697	3.4	127	4247903	3.4	125	4248698	3.1	33
4247617	3.4	126	4247698	3.4	127	4247904	3.4	125	4248699	3.1	33
4247618	3.4	126	4247699	3.4	127	4247905	3.4	125	4248700	3.1	33
4247619	3.4	126	4247700	3.4	127	4247906	3.4	125	4248701	3.1	33
4247620	3.4	126	4247701	3.4	127	4247907	3.4	125	4248702	3.1	33
4247621	3.4	126	4247702	3.4	127	4247908	3.4	125	4248703	3.1	33
4247622	3.4	126	4247703	3.4	127	4247909	3.4	125	4248704	3.1	33
4247623	3.4	126	4247704	3.4	127	4248404	3.1	32	4248705	3.1	33
4247624	3.4	126	4247830	3.4	124	4248405	3.1	32	4248706	3.1	33
4247625	3.4	126	4247831	3.4	124	4248407	3.1	32	4248707	3.1	33
4247626	3.4	126	4247832	3.4	124	4248409	3.1	33	4248708	3.1	33
4247627	3.4	126	4247833	3.4	124	4248529	3.1	33	4248709	3.1	33
4247628	3.4	126	4247834	3.4	124	4248531	3.1	33	4248710	3.1	33
4247629	3.4	126	4247835	3.4	124	4248539	3.1	33	4248711	3.1	33
4247630	3.4	126	4247836	3.4	124	4248541	3.1	33	4248712	3.1	33
4247631	3.4	126	4247837	3.4	124	4248542	3.1	33	4248713	3.1	33
4247632	3.4	126	4247838	3.4	124	4248543	3.1	33	4248714	3.1	33
4247633	3.4	126	4247839	3.4	124	4248610	3.1	33	4248715	3.1	33
4247634	3.4	126	4247840	3.4	124	4248612	3.1	33	4248716	3.1	33
4247635	3.4	126	4247841	3.4	124	4248614	3.1	33	4248717	3.1	33

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
4248719	3.1	33	4249694	3.1	35	4305500	3.1	43	4309305	3.1	45
4248720	3.1	33	4249695	3.1	35	4305501	3.1	43	4309310	3.1	45
4248721	3.1	33	4249696	3.1	35	4305502	3.1	43	4309311	3.1	45
4248722	3.1	33	4249697	3.1	35	4305503	3.1	43	4309312	3.1	45
4248723	3.1	33	4249698	3.1	35	4305504	3.1	43	4309313	3.1	45
4248724	3.1	33	4249699	3.1	35	4305505	3.1	43	4309315	3.1	45
4248725	3.1	33	4249700	3.1	35	4305506	3.1	43	4309316	3.1	45
4248727	3.1	33	4249701	3.1	35	4305507	3.1	43	4309320	3.1	45
4249600	3.1	34	4264007	3.2	56	4305508	3.1	43	4309321	3.1	45
4249601	3.1	34	4264009	3.2	56	4305509	3.1	43	4309322	3.1	45
4249602	3.1	34	4264011	3.2	56	4305510	3.1	43	4309323	3.1	45
4249603	3.1	34	4264013	3.2	56	4305511	3.1	43	4309325	3.1	45
4249604	3.1	34	4264016	3.2	56	4305512	3.1	43	4309326	3.1	45
4249610	3.1	34	4264021	3.2	56	4305513	3.1	43	4309327	3.1	45
4249611	3.1	34	4264029	3.2	56	4305514	3.1	43	4309330	3.1	45
4249612	3.1	34	4264036	3.2	56	4305515	3.1	43	4309331	3.1	45
4249613	3.1	34	4264112	3.2	56	4306090	3.3	82	4309332	3.1	45
4249614	3.1	34	4264116	3.2	56	4306112	3.3	82	4309333	3.1	45
4249615	3.1	34	4264117	3.2	56	4306139	3.3	82	4309335	3.1	45
4249616	3.1	34	4264120	3.2	56	4306163	3.3	82	4309336	3.1	45
4249617	3.1	34	4264121	3.2	56	4306210	3.3	82	4309337	3.1	45
4249618	3.1	34	4264125	3.2	56	4306295	3.3	82	4650494	3.1	10
4249619	3.1	34	4264126	3.2	56	4306316	3.3	82	4650495	3.1	10
4249620	3.1	34	4264132	3.2	56	4306317	3.3	82	4650496	3.1	10
4249621	3.1	34	4264133	3.2	56	4306320	3.3	82	4650497	3.1	10
4249622	3.1	34	4264134	3.2	56	4306321	3.3	82	4650498	3.1	10
4249623	3.1	34	4264135	3.2	56	4306325	3.3	82	4651709	3.1	37
4249624	3.1	34	4264217	3.2	56	4306332	3.3	82	4651710	3.1	37
4249625	3.1	34	4264221	3.2	56	4307003	3.3	83	4651711	3.1	37
4249626	3.1	34	4264226	3.2	56	4307011	3.3	83	4651712	3.1	37
4249627	3.1	34	4264232	3.2	56	4307020	3.3	83	4651713	3.1	37
4249628	3.1	34	4264240	3.2	56	4307038	3.3	83	4651714	3.1	37
4249640	3.1	34	4264241	3.2	56	4307046	3.3	83	4651715	3.1	37
4249641	3.1	34	4264416	3.2	54	4307054	3.3	83	4651716	3.1	37
4249642	3.1	34	4264420	3.2	54	4307062	3.3	83	4651717	3.1	37
4249643	3.1	34	4264425	3.2	54	4307612	3.3	83	4651718	3.1	37
4249644	3.1	34	4264432	3.2	54	4307616	3.3	83	4651719	3.1	37
4249645	3.1	34	4264440	3.2	54	4307617	3.3	83	4651720	3.1	37
4249646	3.1	34	4264450	3.2	54	4307620	3.3	83	4651721	3.1	37
4249647	3.1	34	4264463	3.2	54	4307621	3.3	83	4651722	3.1	37
4249648	3.1	34	4300009	3.1	41	4307625	3.3	83	4651724	3.1	37
4249649	3.1	34	4300017	3.1	41	4307632	3.3	83	4651725	3.1	37
4249650	3.1	34	4300025	3.1	41	4308093	3.1	42	4651726	3.1	37
4249651	3.1	34	4300033	3.1	41	4308115	3.1	42	4651727	3.1	37
4249652	3.1	34	4300041	3.1	41	4308131	3.1	42	4651728	3.1	37
4249653	3.1	34	4300050	3.1	41	4308166	3.1	42	4651807	3.1	37
4249654	3.1	34	4300068	3.1	41	4308212	3.1	42	4651809	3.1	37
4249655	3.1	34	4300116	3.1	41	4308298	3.1	42	4651811	3.1	37
4249656	3.1	34	4300120	3.1	41	4308516	3.1	42	4651813	3.1	37
4249657	3.1	34	4300121	3.1	41	4308520	3.1	42	4651815	3.1	37
4249658	3.1	35	4300125	3.1	41	4308521	3.1	42	4834217	5.5	86
4249659	3.1	35	4300126	3.1	41	4308525	3.1	42	5202078	3.1	47
4249660	3.1	35	4300132	3.1	41	4308526	3.1	42	5202094	3.1	47
4249661	3.1	35	4300133	3.1	41	4308532	3.1	42	5202116	3.1	47
4249662	3.1	35	4304071	3.3	81	4308533	3.1	42	5202132	3.1	47
4249663	3.1	35	4304098	3.3	81	4309014	3.1	44	5202167	3.1	47
4249664	3.1	35	4304110	3.3	81	4309022	3.1	44	5202213	3.1	47
4249670	3.1	35	4304136	3.3	81	4309030	3.1	44	5202299	3.1	47
4249671	3.1	35	4304160	3.3	81	4309049	3.1	44	5202361	3.1	47
4249672	3.1	35	4304217	3.3	81	4309057	3.1	44	5202418	3.1	47
4249673	3.1	35	4304292	3.3	81	4309065	3.1	44	5202426	3.1	47
4249674	3.1	35	4304365	3.3	81	4309073	3.1	44	5202434	3.1	47
4249675	3.1	35	4304420	3.3	81	4309081	3.1	44	5202485	3.1	47
4249676	3.1	35	4304489	3.3	81	4309090	3.1	44	5202507	3.1	47
4249677	3.1	35	4304512	3.3	81	4309103	3.1	44	5202515	3.1	47
4249678	3.1	35	4304516	3.3	81	4309111	3.1	44	5202590	3.1	47
4249679	3.1	35	4304517	3.3	81	4309120	3.1	44	5202604	3.1	47
4249680	3.1	35	4304520	3.3	81	4309138	3.1	44	5202612	3.1	47
4249681	3.1	35	4304521	3.3	81	4309146	3.1	44	5202620	3.1	47
4249682	3.1	35	4304525	3.3	81	4309154	3.1	44	5203112	3.1	48
4249683	3.1	35	4304532	3.3	81	4309162	3.1	44	5203116	3.1	48
4249684	3.1	35	4305078	3.1	43	4309170	3.1	44	5203120	3.1	48
4249685	3.1	35	4305094	3.1	43	4309189	3.1	44	5203121	3.1	48
4249686	3.1	35	4305116	3.1	43	4309197	3.1	44	5203125	3.1	48
4249687	3.1	35	4305132	3.1	43	4309200	3.1	44	5203126	3.1	48
4249688	3.1	35	4305167	3.1	43	4309219	3.1	44	5203132	3.1	48
4249689	3.1	35	4305213	3.1	43	4309227	3.1	44	5203133	3.1	48
4249690	3.1	35	4305299	3.1	43	4309235	3.1	44	5203140	3.1	48
4249691	3.1	35	4305361	3.1	43	4309243	3.1	44	5203150	3.1	48
4249692	3.1	35	4305426	3.1	43	4309251	3.1	44	5203151	3.1	48
4249693	3.1	35	4305485	3.1	43	4309300	3.1	45	5203163	3.1	48

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
5211107	3.1	19	5306111	3.1	46	5307750	3.1	8	5308955	3.1	7
5211109	3.1	19	5306112	3.1	46	5307763	3.1	8	5308956	3.1	7
5211111	3.1	19	5306113	3.1	46	5308070	3.1	6	5308957	3.1	7
5211113	3.1	19	5306114	3.1	46	5308097	3.1	6	5308958	3.1	7
5211116	3.1	19	5306116	3.1	46	5308119	3.1	6	5308959	3.1	7
5211121	3.1	19	5306117	3.1	46	5308135	3.1	6	5308960	3.1	7
5211129	3.1	19	5306130	3.1	46	5308160	3.1	6	5308961	3.1	7
5211150	3.1	19	5306131	3.1	46	5308216	3.1	6	5308962	3.1	7
5211151	3.1	19	5306132	3.1	46	5308291	3.1	6	5309007	3.1	6
5211152	3.1	19	5306133	3.1	46	5308364	3.1	6	5309009	3.1	6
5211153	3.1	19	5306140	3.1	46	5308365	3.1	6	5309011	3.1	6
5211154	3.1	19	5306141	3.1	46	5308366	3.1	6	5309013	3.1	6
5211155	3.1	19	5306142	3.1	46	5308507	3.1	6	5309016	3.1	6
5211156	3.1	19	5306143	3.1	46	5308509	3.1	6	5309021	3.1	6
5211157	3.1	19	5306150	3.1	46	5308511	3.1	6	5309029	3.1	6
5211158	3.1	19	5306151	3.1	46	5308513	3.1	6	5309036	3.1	6
5211159	3.1	19	5306152	3.1	46	5308516	3.1	6	5309042	3.1	6
5211307	3.1	19	5307012	3.1	8	5308521	3.1	6	5309048	3.1	6
5211309	3.1	19	5307016	3.1	8	5308529	3.1	6	5309107	3.1	6
5211311	3.1	19	5307017	3.1	8	5308536	3.1	6	5309109	3.1	6
5211313	3.1	19	5307020	3.1	8	5308537	3.1	6	5309111	3.1	6
5211316	3.1	19	5307021	3.1	8	5308538	3.1	6	5309113	3.1	6
5211321	3.1	19	5307025	3.1	8	5308707	3.1	6	5309116	3.1	6
5211329	3.1	19	5307026	3.1	8	5308709	3.1	6	5309121	3.1	6
5211350	3.1	19	5307032	3.1	8	5308711	3.1	6	5309129	3.1	6
5211351	3.1	19	5307040	3.1	8	5308713	3.1	6	5309136	3.1	6
5211352	3.1	19	5307050	3.1	8	5308716	3.1	6	5309142	3.1	6
5211353	3.1	19	5307063	3.1	8	5308721	3.1	6	5309148	3.1	6
5211354	3.1	19	5307112	3.1	8	5308729	3.1	6	5309207	3.1	6
5211355	3.1	19	5307116	3.1	8	5308736	3.1	6	5309209	3.1	6
5211356	3.1	19	5307117	3.1	8	5308737	3.1	6	5309211	3.1	6
5211357	3.1	19	5307120	3.1	8	5308738	3.1	6	5309213	3.1	6
5211358	3.1	19	5307121	3.1	8	5308900	3.1	9	5309216	3.1	6
5211359	3.1	19	5307125	3.1	8	5308901	3.1	9	5309221	3.1	6
5211416	3.1	19	5307126	3.1	8	5308902	3.1	9	5309229	3.1	6
5211420	3.1	19	5307132	3.1	8	5308903	3.1	9	5309236	3.1	6
5211421	3.1	19	5307140	3.1	8	5308904	3.1	9	5309242	3.1	6
5211425	3.1	19	5307150	3.1	8	5308905	3.1	9	5309248	3.1	6
5211432	3.1	19	5307163	3.1	8	5308906	3.1	9	5309512	3.1	7
5211441	3.1	19	5307212	3.1	8	5308907	3.1	9	5309515	3.1	7
5211442	3.1	19	5307216	3.1	8	5308910	3.1	9	5309516	3.1	7
5211443	3.1	19	5307217	3.1	8	5308911	3.1	9	5309519	3.1	7
5211444	3.1	19	5307220	3.1	8	5308912	3.1	9	5309520	3.1	7
5211445	3.1	19	5307221	3.1	8	5308913	3.1	9	5309524	3.1	7
5211446	3.1	19	5307225	3.1	8	5308914	3.1	9	5309525	3.1	7
5211447	3.1	19	5307226	3.1	8	5308915	3.1	9	5309532	3.1	7
5211448	3.1	19	5307232	3.1	8	5308916	3.1	9	5309540	3.1	7
5211616	3.1	19	5307240	3.1	8	5308917	3.1	9	5309550	3.1	7
5211620	3.1	19	5307250	3.1	8	5308920	3.1	9	5309563	3.1	7
5211621	3.1	19	5307263	3.1	8	5308921	3.1	9	5309612	3.1	7
5211625	3.1	19	5307512	3.1	8	5308922	3.1	9	5309615	3.1	7
5211632	3.1	19	5307516	3.1	8	5308923	3.1	9	5309616	3.1	7
5211641	3.1	19	5307517	3.1	8	5308924	3.1	9	5309619	3.1	7
5211642	3.1	19	5307520	3.1	8	5308925	3.1	9	5309620	3.1	7
5211643	3.1	19	5307521	3.1	8	5308926	3.1	9	5309624	3.1	7
5211644	3.1	19	5307525	3.1	8	5308927	3.1	9	5309625	3.1	7
5211645	3.1	19	5307526	3.1	8	5308930	3.1	7	5309632	3.1	7
5211646	3.1	19	5307532	3.1	8	5308931	3.1	7	5309640	3.1	7
5211647	3.1	19	5307540	3.1	8	5308932	3.1	7	5309650	3.1	7
5211648	3.1	19	5307550	3.1	8	5308933	3.1	7	5309663	3.1	7
5306007	3.1	46	5307563	3.1	8	5308934	3.1	7	5309712	3.1	7
5306009	3.1	46	5307612	3.1	8	5308935	3.1	7	5309715	3.1	7
5306011	3.1	46	5307616	3.1	8	5308936	3.1	7	5309716	3.1	7
5306012	3.1	46	5307617	3.1	8	5308937	3.1	7	5309719	3.1	7
5306013	3.1	46	5307620	3.1	8	5308938	3.1	7	5309720	3.1	7
5306014	3.1	46	5307621	3.1	8	5308939	3.1	7	5309724	3.1	7
5306016	3.1	46	5307625	3.1	8	5308940	3.1	7	5309725	3.1	7
5306017	3.1	46	5307626	3.1	8	5308941	3.1	7	5309732	3.1	7
5306030	3.1	46	5307632	3.1	8	5308942	3.1	7	5309740	3.1	7
5306031	3.1	46	5307640	3.1	8	5308943	3.1	7	5309750	3.1	7
5306032	3.1	46	5307650	3.1	8	5308944	3.1	7	5309763	3.1	7
5306033	3.1	46	5307663	3.1	8	5308945	3.1	7	5313610	3.1	18
5306040	3.1	46	5307712	3.1	8	5308946	3.1	7	5313611	3.1	18
5306041	3.1	46	5307716	3.1	8	5308947	3.1	7	5313612	3.1	18
5306042	3.1	46	5307717	3.1	8	5308948	3.1	7	5313613	3.1	18
5306043	3.1	46	5307720	3.1	8	5308949	3.1	7	5313614	3.1	18
5306050	3.1	46	5307721	3.1	8	5308950	3.1	7	5313615	3.1	18
5306051	3.1	46	5307725	3.1	8	5308951	3.1	7	5313616	3.1	18
5306052	3.1	46	5307726	3.1	8	5308952	3.1	7	5313620	3.1	18
5306107	3.1	46	5307732	3.1	8	5308953	3.1	7	5313621	3.1	18
5306109	3.1	46	5307740	3.1	8	5308954	3.1	7	5313622	3.1	18

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
5313623	3.1	18	5315503	3.1	23	5315674	3.1	24	5315879	3.1	24
5313624	3.1	18	5315504	3.1	23	5315675	3.1	24	5315880	3.1	24
5313625	3.1	18	5315510	3.1	23	5315676	3.1	24	5315881	3.1	24
5313626	3.1	18	5315515	3.1	24	5315677	3.1	24	5315891	3.1	24
5313640	3.1	18	5315516	3.1	24	5315678	3.1	24	5315892	3.1	24
5313641	3.1	18	5315520	3.1	24	5315679	3.1	24	5315893	3.1	24
5313642	3.1	18	5315521	3.1	24	5315683	3.1	24	5315894	3.1	24
5313643	3.1	18	5315522	3.1	24	5315684	3.1	24	5315895	3.1	24
5313644	3.1	18	5315523	3.1	24	5315690	3.1	24	5315896	3.1	24
5313650	3.1	18	5315524	3.1	24	5315691	3.1	24	5315897	3.1	24
5313651	3.1	18	5315525	3.1	24	5315692	3.1	24	5315898	3.1	24
5313652	3.1	18	5315526	3.1	24	5315693	3.1	24	5315899	3.1	24
5313653	3.1	18	5315527	3.1	24	5315694	3.1	24	5315900	3.1	24
5313654	3.1	18	5315528	3.1	24	5315695	3.1	24	5315963	3.1	24
5313670	3.1	18	5315529	3.1	24	5315696	3.1	24	5315964	3.1	24
5313671	3.1	18	5315530	3.1	24	5315697	3.1	24	5316100	3.1	25
5313672	3.1	18	5315531	3.1	24	5315698	3.1	24	5316101	3.1	25
5313673	3.1	18	5315532	3.1	24	5315699	3.1	24	5316102	3.1	25
5313674	3.1	18	5315540	3.1	24	5315700	3.1	24	5316103	3.1	25
5313675	3.1	18	5315542	3.1	24	5315800	3.1	23	5316104	3.1	25
5313676	3.1	18	5315543	3.1	24	5315801	3.1	23	5316200	3.1	25
5313677	3.1	18	5315544	3.1	24	5315810	3.1	23	5316201	3.1	25
5313680	3.1	18	5315545	3.1	24	5315811	3.1	23	5316202	3.1	25
5313681	3.1	18	5315546	3.1	24	5315812	3.1	23	5316203	3.1	25
5313682	3.1	18	5315547	3.1	24	5315813	3.1	23	5316204	3.1	25
5313683	3.1	18	5315600	3.1	23	5315814	3.1	23	5316205	3.1	25
5313684	3.1	18	5315601	3.1	23	5315815	3.1	23	5316206	3.1	25
5313685	3.1	18	5315610	3.1	23	5315816	3.1	23	5316207	3.1	25
5313686	3.1	18	5315611	3.1	23	5315817	3.1	23	5316208	3.1	25
5313687	3.1	18	5315612	3.1	23	5315820	3.1	23	5316209	3.1	25
5313710	3.1	18	5315613	3.1	23	5315821	3.1	23	5316210	3.1	25
5313711	3.1	18	5315614	3.1	23	5315822	3.1	23	5316211	3.1	25
5313712	3.1	18	5315615	3.1	23	5315823	3.1	23	5316212	3.1	25
5313713	3.1	18	5315616	3.1	23	5315824	3.1	23	5316213	3.1	25
5313714	3.1	18	5315617	3.1	23	5315825	3.1	23	5316214	3.1	25
5313715	3.1	18	5315620	3.1	23	5315826	3.1	23	5316215	3.1	25
5313716	3.1	18	5315621	3.1	23	5315827	3.1	23	5316216	3.1	25
5313717	3.1	18	5315622	3.1	23	5315828	3.1	23	5316217	3.1	25
5313718	3.1	18	5315623	3.1	23	5315829	3.1	23	5316300	3.1	25
5313719	3.1	18	5315624	3.1	23	5315830	3.1	23	5316301	3.1	25
5313720	3.1	18	5315625	3.1	23	5315831	3.1	23	5316302	3.1	25
5313721	3.1	18	5315626	3.1	23	5315832	3.1	23	5316303	3.1	25
5313722	3.1	18	5315627	3.1	23	5315833	3.1	23	5316304	3.1	25
5313723	3.1	18	5315628	3.1	23	5315834	3.1	23	5316305	3.1	25
5313724	3.1	18	5315629	3.1	23	5315835	3.1	23	5316306	3.1	25
5313725	3.1	18	5315630	3.1	23	5315836	3.1	23	5316307	3.1	25
5313726	3.1	18	5315631	3.1	23	5315837	3.1	23	5316308	3.1	25
5313727	3.1	18	5315632	3.1	23	5315838	3.1	23	5316309	3.1	25
5313728	3.1	18	5315633	3.1	23	5315839	3.1	23	5316310	3.1	25
5313729	3.1	18	5315634	3.1	23	5315840	3.1	23	5316311	3.1	25
5315110	3.1	23	5315635	3.1	23	5315841	3.1	23	5316312	3.1	25
5315111	3.1	23	5315636	3.1	23	5315842	3.1	23	5316313	3.1	25
5315112	3.1	23	5315637	3.1	23	5315850	3.1	24	5316400	3.1	25
5315113	3.1	23	5315638	3.1	23	5315851	3.1	24	5316401	3.1	25
5315114	3.1	23	5315639	3.1	23	5315852	3.1	24	5316402	3.1	26
5315130	3.1	23	5315640	3.1	23	5315853	3.1	24	5316403	3.1	26
5315160	3.1	24	5315641	3.1	23	5315854	3.1	24	5316404	3.1	26
5315210	3.1	24	5315642	3.1	23	5315855	3.1	24	5316405	3.1	26
5315211	3.1	24	5315650	3.1	24	5315856	3.1	24	5316406	3.1	26
5315212	3.1	24	5315651	3.1	24	5315857	3.1	24	5316407	3.1	26
5315213	3.1	24	5315652	3.1	24	5315858	3.1	24	5316408	3.1	26
5315214	3.1	24	5315653	3.1	24	5315859	3.1	24	5316409	3.1	26
5315215	3.1	24	5315654	3.1	24	5315860	3.1	24	5316410	3.1	26
5315216	3.1	24	5315655	3.1	24	5315861	3.1	24	5316411	3.1	26
5315217	3.1	24	5315656	3.1	24	5315862	3.1	24	5316412	3.1	26
5315218	3.1	24	5315658	3.1	24	5315863	3.1	24	5316413	3.1	26
5315219	3.1	24	5315659	3.1	24	5315864	3.1	24	5316414	3.1	26
5315220	3.1	24	5315660	3.1	24	5315865	3.1	24	5316415	3.1	26
5315221	3.1	24	5315661	3.1	24	5315866	3.1	24	5316416	3.1	26
5315222	3.1	24	5315662	3.1	24	5315867	3.1	24	5316417	3.1	26
5315289	3.1	24	5315663	3.1	24	5315868	3.1	24	5318100	3.1	25
5315290	3.1	24	5315664	3.1	24	5315869	3.1	24	5318101	3.1	25
5315292	3.1	24	5315665	3.1	24	5315870	3.1	24	5318102	3.1	25
5315293	3.1	24	5315666	3.1	24	5315871	3.1	24	5318103	3.1	25
5315294	3.1	24	5315667	3.1	24	5315872	3.1	24	5318104	3.1	25
5315295	3.1	24	5315668	3.1	24	5315873	3.1	24	5318200	3.1	25
5315296	3.1	24	5315669	3.1	24	5315874	3.1	24	5318201	3.1	25
5315297	3.1	24	5315670	3.1	24	5315875	3.1	24	5318202	3.1	25
5315500	3.1	23	5315671	3.1	24	5315876	3.1	24	5318203	3.1	25
5315501	3.1	23	5315672	3.1	24	5315877	3.1	24	5318204	3.1	25
5315502	3.1	23	5315673	3.1	24	5315878	3.1	24	5318205	3.1	25

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
5318206	3.1	25	5318538	3.4	111	5318665	3.4	110	5320127	3.1	20
5318207	3.1	25	5318539	3.4	112	5318666	3.4	110	5320160	3.1	20
5318208	3.1	25	5318540	3.4	112	5318667	3.4	110	5320161	3.1	20
5318209	3.1	25	5318541	3.4	112	5318668	3.4	110	5320162	3.1	20
5318210	3.1	25	5318542	3.4	112	5318669	3.4	110	5320163	3.1	20
5318211	3.1	25	5318543	3.4	112	5318670	3.4	110	5320164	3.1	20
5318212	3.1	25	5318544	3.4	112	5318671	3.4	110	5320165	3.1	20
5318213	3.1	25	5318545	3.4	112	5318672	3.4	110	5320166	3.1	20
5318214	3.1	25	5318546	3.4	112	5318673	3.4	110	5320167	3.1	20
5318215	3.1	25	5318547	3.4	112	5318674	3.4	110	5320170	3.1	20
5318216	3.1	25	5318548	3.4	112	5318675	3.4	110	5320171	3.1	20
5318217	3.1	25	5318549	3.4	112	5318676	3.4	110	5320172	3.1	20
5318300	3.1	25	5318550	3.4	112	5318677	3.4	110	5320173	3.1	20
5318301	3.1	25	5318551	3.4	112	5318678	3.4	110	5320177	3.1	20
5318302	3.1	25	5318552	3.4	112	5318679	3.4	110	5320300	3.1	21
5318303	3.1	25	5318553	3.4	112	5318680	3.4	110	5320305	3.1	21
5318304	3.1	25	5318554	3.4	112	5318681	3.4	110	5320306	3.1	21
5318305	3.1	25	5318555	3.4	112	5318682	3.4	110	5320307	3.1	21
5318306	3.1	25	5318601	3.4	109	5318683	3.4	110	5320310	3.1	21
5318307	3.1	25	5318602	3.4	109	5318684	3.4	110	5320311	3.1	21
5318308	3.1	25	5318603	3.4	109	5318685	3.4	110	5320315	3.1	21
5318309	3.1	25	5318604	3.4	109	5318686	3.4	110	5320316	3.1	21
5318310	3.1	25	5318605	3.4	109	5318687	3.4	110	5320317	3.1	21
5318311	3.1	25	5318606	3.4	109	5318688	3.4	110	5320320	3.1	21
5318312	3.1	25	5318607	3.4	109	5318689	3.4	110	5320321	3.1	21
5318313	3.1	25	5318608	3.4	109	5318690	3.4	110	5320322	3.1	21
5318400	3.1	25	5318609	3.4	109	5318691	3.4	110	5320325	3.1	21
5318401	3.1	25	5318610	3.4	109	5318692	3.4	110	5320326	3.1	21
5318402	3.1	26	5318611	3.4	109	5318693	3.4	110	5320327	3.1	21
5318403	3.1	26	5318612	3.4	109	5318694	3.4	110	5320328	3.1	21
5318404	3.1	26	5318613	3.4	109	5318695	3.4	110	5320330	3.1	21
5318405	3.1	26	5318614	3.4	109	5318696	3.4	110	5320331	3.1	21
5318406	3.1	26	5318615	3.4	109	5318697	3.4	110	5320332	3.1	21
5318407	3.1	26	5318616	3.4	109	5318698	3.4	110	5320333	3.1	21
5318408	3.1	26	5318617	3.4	109	5318699	3.4	110	5320334	3.1	21
5318409	3.1	26	5318618	3.4	109	5318700	3.4	110	5320335	3.1	21
5318410	3.1	26	5318619	3.4	109	5318701	3.4	110	5320336	3.1	21
5318411	3.1	26	5318620	3.4	109	5318702	3.4	110	5320337	3.1	21
5318412	3.1	26	5318621	3.4	109	5318703	3.4	110	5320342	3.1	21
5318413	3.1	26	5318622	3.4	109	5320001	3.1	20	5320343	3.1	21
5318414	3.1	26	5318623	3.4	109	5320002	3.1	20	5320344	3.1	21
5318415	3.1	26	5318624	3.4	109	5320003	3.1	20	5320345	3.1	21
5318416	3.1	26	5318625	3.4	109	5320004	3.1	20	5320351	3.1	21
5318417	3.1	26	5318626	3.4	109	5320005	3.1	20	5320355	3.1	21
5318501	3.4	111	5318627	3.4	109	5320006	3.1	20	5320360	3.1	21
5318502	3.4	111	5318628	3.4	109	5320007	3.1	20	5320361	3.1	21
5318503	3.4	111	5318629	3.4	109	5320008	3.1	20	5320365	3.1	21
5318504	3.4	111	5318630	3.4	109	5320009	3.1	20	5320366	3.1	21
5318505	3.4	111	5318631	3.4	109	5320051	3.1	20	5320370	3.1	21
5318506	3.4	111	5318632	3.4	109	5320052	3.1	20	5320371	3.1	21
5318507	3.4	111	5318633	3.4	109	5320053	3.1	20	5320375	3.1	21
5318508	3.4	111	5318634	3.4	109	5320054	3.1	20	5320376	3.1	21
5318509	3.4	111	5318635	3.4	109	5320055	3.1	20	5320380	3.1	21
5318510	3.4	111	5318636	3.4	109	5320056	3.1	20	5320381	3.1	21
5318511	3.4	111	5318637	3.4	109	5320057	3.1	20	5320382	3.1	21
5318512	3.4	111	5318639	3.4	109	5320058	3.1	20	5320383	3.1	21
5318513	3.4	111	5318640	3.4	110	5320059	3.1	20	5320384	3.1	21
5318514	3.4	111	5318641	3.4	110	5320071	3.1	20	5320385	3.1	21
5318515	3.4	111	5318642	3.4	110	5320072	3.1	20	5320386	3.1	21
5318516	3.4	111	5318643	3.4	110	5320073	3.1	20	5320387	3.1	21
5318517	3.4	111	5318644	3.4	110	5320074	3.1	20	5320390	3.1	21
5318518	3.4	111	5318645	3.4	110	5320075	3.1	20	5320393	3.1	21
5318519	3.4	111	5318646	3.4	110	5320076	3.1	20	5320394	3.1	21
5318520	3.4	111	5318647	3.4	110	5320091	3.1	20	5320396	3.1	21
5318521	3.4	111	5318648	3.4	110	5320092	3.1	20	5320397	3.1	21
5318522	3.4	111	5318649	3.4	110	5320093	3.1	20	5320500	3.1	21
5318523	3.4	111	5318650	3.4	110	5320094	3.1	20	5320505	3.1	21
5318524	3.4	111	5318651	3.4	110	5320095	3.1	20	5320506	3.1	21
5318525	3.4	111	5318652	3.4	110	5320096	3.1	20	5320507	3.1	21
5318526	3.4	111	5318653	3.4	110	5320100	3.1	20	5320510	3.1	21
5318527	3.4	111	5318654	3.4	110	5320101	3.1	20	5320511	3.1	21
5318528	3.4	111	5318655	3.4	110	5320102	3.1	20	5320515	3.1	21
5318529	3.4	111	5318656	3.4	110	5320103	3.1	20	5320516	3.1	21
5318530	3.4	111	5318657	3.4	110	5320104	3.1	20	5320517	3.1	21
5318531	3.4	111	5318658	3.4	110	5320105	3.1	20	5320520	3.1	21
5318532	3.4	111	5318659	3.4	110	5320106	3.1	20	5320521	3.1	21
5318533	3.4	111	5318660	3.4	110	5320107	3.1	20	5320522	3.1	21
5318534	3.4	111	5318661	3.4	110	5320120	3.1	20	5320525	3.1	21
5318535	3.4	111	5318662	3.4	110	5320121	3.1	20	5320526	3.1	21
5318536	3.4	111	5318663	3.4	110	5320122	3.1	20	5320527	3.1	21
5318537	3.4	111	5318664	3.4	110	5320123	3.1	20	5320528	3.1	21

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
5320530	3.1	21	5320771	3.1	22	5320885	3.1	22	5321887	3.4	107
5320531	3.1	21	5320772	3.1	22	5320886	3.1	22	5321888	3.4	107
5320532	3.1	21	5320773	3.1	22	5320887	3.1	22	5321890	3.4	107
5320533	3.1	21	5320774	3.1	22	5320888	3.1	22	5321891	3.4	107
5320534	3.1	21	5320775	3.1	22	5320890	3.1	22	5330012	3.1	27
5320535	3.1	21	5320776	3.1	22	5320891	3.1	22	5330016	3.1	27
5320536	3.1	21	5320777	3.1	22	5320892	3.1	22	5330020	3.1	27
5320537	3.1	21	5320780	3.1	22	5320893	3.1	22	5330021	3.1	27
5320542	3.1	21	5320781	3.1	22	5320894	3.1	22	5330025	3.1	27
5320543	3.1	21	5320782	3.1	22	5320895	3.1	22	5330032	3.1	27
5320544	3.1	21	5320783	3.1	22	5320896	3.1	22	5330216	3.1	27
5320545	3.1	21	5320784	3.1	22	5321701	3.4	108	5330220	3.1	27
5320551	3.1	21	5320785	3.1	22	5321702	3.4	108	5330221	3.1	27
5320555	3.1	21	5320786	3.1	22	5321703	3.4	108	5330225	3.1	27
5320560	3.1	21	5320787	3.1	22	5321704	3.4	108	5330232	3.1	27
5320561	3.1	21	5320788	3.1	22	5321705	3.4	108	5507050	3.4	105
5320565	3.1	21	5320790	3.1	22	5321706	3.4	108	5507051	3.4	105
5320566	3.1	21	5320791	3.1	22	5321707	3.4	108	5507052	3.4	105
5320570	3.1	21	5320792	3.1	22	5321708	3.4	108	5507053	3.4	105
5320571	3.1	21	5320793	3.1	22	5321709	3.4	108	5507054	3.4	105
5320575	3.1	21	5320794	3.1	22	5321710	3.4	108	5507055	3.4	105
5320576	3.1	21	5320795	3.1	22	5321711	3.4	108	5507150	3.4	105
5320580	3.1	21	5320796	3.1	22	5321712	3.4	108	5507151	3.4	105
5320581	3.1	21	5320800	3.1	22	5321713	3.4	108	5507152	3.4	105
5320582	3.1	21	5320801	3.1	22	5321714	3.4	108	5507153	3.4	105
5320583	3.1	21	5320802	3.1	22	5321715	3.4	108	5507154	3.4	105
5320584	3.1	21	5320803	3.1	22	5321716	3.4	108	5507155	3.4	105
5320585	3.1	21	5320804	3.1	22	5321717	3.4	108	5507156	3.4	105
5320586	3.1	21	5320805	3.1	22	5321718	3.4	108	5507157	3.4	105
5320587	3.1	21	5320806	3.1	22	5321719	3.4	108	5507158	3.4	105
5320590	3.1	21	5320807	3.1	22	5321720	3.4	108	5507250	3.4	105
5320593	3.1	21	5320808	3.1	22	5321721	3.4	108	5507251	3.4	105
5320594	3.1	21	5320810	3.1	22	5321722	3.4	108	5507252	3.4	105
5320596	3.1	21	5320815	3.1	22	5321723	3.4	108	5507253	3.4	105
5320597	3.1	21	5320816	3.1	22	5321724	3.4	108	5507254	3.4	105
5320700	3.1	22	5320817	3.1	22	5321725	3.4	108	5507360	3.4	105
5320701	3.1	22	5320818	3.1	22	5321726	3.4	108	5507361	3.4	105
5320702	3.1	22	5320820	3.1	22	5321727	3.4	108	5507362	3.4	105
5320703	3.1	22	5320821	3.1	22	5321801	3.4	106	5507363	3.4	105
5320704	3.1	22	5320822	3.1	22	5321802	3.4	106	5507364	3.4	105
5320705	3.1	22	5320823	3.1	22	5321803	3.4	106	5507365	3.4	105
5320706	3.1	22	5320830	3.1	22	5321804	3.4	106	5507366	3.4	105
5320707	3.1	22	5320831	3.1	22	5321805	3.4	106	5507367	3.4	105
5320708	3.1	22	5320832	3.1	22	5321806	3.4	106	5507540	3.4	102
5320710	3.1	22	5320835	3.1	22	5321807	3.4	106	5507541	3.4	102
5320715	3.1	22	5320836	3.1	22	5321808	3.4	106	5507542	3.4	102
5320716	3.1	22	5320837	3.1	22	5321809	3.4	106	5507543	3.4	102
5320717	3.1	22	5320838	3.1	22	5321810	3.4	106	5507544	3.4	102
5320718	3.1	22	5320840	3.1	22	5321811	3.4	106	5507545	3.4	102
5320720	3.1	22	5320841	3.1	22	5321812	3.4	106	5507546	3.4	102
5320721	3.1	22	5320842	3.1	22	5321813	3.4	106	5507547	3.4	102
5320722	3.1	22	5320843	3.1	22	5321814	3.4	106	5507548	3.4	102
5320723	3.1	22	5320845	3.1	22	5321815	3.4	106	5507549	3.4	102
5320730	3.1	22	5320846	3.1	22	5321816	3.4	106	5507550	3.4	102
5320731	3.1	22	5320847	3.1	22	5321817	3.4	106	5507560	3.4	103
5320732	3.1	22	5320848	3.1	22	5321818	3.4	106	5507561	3.4	103
5320735	3.1	22	5320849	3.1	22	5321819	3.4	106	5507562	3.4	103
5320736	3.1	22	5320850	3.1	22	5321820	3.4	106	5507563	3.4	103
5320737	3.1	22	5320851	3.1	22	5321821	3.4	106	5507564	3.4	103
5320738	3.1	22	5320852	3.1	22	5321822	3.4	106	5507565	3.4	103
5320740	3.1	22	5320853	3.1	22	5321823	3.4	106	5507566	3.4	103
5320741	3.1	22	5320855	3.1	22	5321824	3.4	106	5507567	3.4	103
5320742	3.1	22	5320856	3.1	22	5321825	3.4	106	5507568	3.4	103
5320743	3.1	22	5320857	3.1	22	5321865	3.4	107	5507569	3.4	103
5320745	3.1	22	5320858	3.1	22	5321866	3.4	107	5507570	3.4	103
5320746	3.1	22	5320859	3.1	22	5321867	3.4	107	5507640	3.4	102
5320747	3.1	22	5320860	3.1	22	5321868	3.4	107	5507641	3.4	102
5320748	3.1	22	5320861	3.1	22	5321869	3.4	107	5507642	3.4	102
5320749	3.1	22	5320870	3.1	22	5321870	3.4	107	5507643	3.4	102
5320750	3.1	22	5320871	3.1	22	5321871	3.4	107	5507644	3.4	102
5320751	3.1	22	5320872	3.1	22	5321872	3.4	107	5507645	3.4	102
5320752	3.1	22	5320873	3.1	22	5321873	3.4	107	5507646	3.4	102
5320753	3.1	22	5320874	3.1	22	5321874	3.4	107	5507647	3.4	102
5320755	3.1	22	5320875	3.1	22	5321875	3.4	107	5507648	3.4	102
5320756	3.1	22	5320876	3.1	22	5321880	3.4	107	5507649	3.4	102
5320757	3.1	22	5320877	3.1	22	5321881	3.4	107	5507650	3.4	102
5320758	3.1	22	5320880	3.1	22	5321882	3.4	107	5507660	3.4	103
5320759	3.1	22	5320881	3.1	22	5321883	3.4	107	5507661	3.4	103
5320760	3.1	22	5320882	3.1	22	5321884	3.4	107	5507662	3.4	103
5320761	3.1	22	5320883	3.1	22	5321885	3.4	107	5507663	3.4	103
5320770	3.1	22	5320884	3.1	22	5321886	3.4	107	5507664	3.4	103

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
5507665	3.4	103	6004756	3.3	61	6102182	3.3	68	6104763	3.3	71
5507666	3.4	103	6004757	3.3	61	6102190	3.3	68	6104764	3.3	71
5507667	3.4	103	6004758	3.3	61	6102204	3.3	68	6104770	3.3	71
5507668	3.4	103	6008207	3.3	64	6102212	3.3	68	6104771	3.3	71
5507669	3.4	103	6008209	3.3	64	6102220	3.3	68	6104772	3.3	71
5507670	3.4	103	6008211	3.3	64	6102239	3.3	68	6104773	3.3	71
5507740	3.4	104	6008213	3.3	64	6102241	3.3	68	6104774	3.3	71
5507741	3.4	104	6008216	3.3	64	6102247	3.3	68	6104775	3.3	71
5507742	3.4	104	6008221	3.3	64	6102255	3.3	68	6104776	3.3	71
5507743	3.4	104	6008229	3.3	64	6102258	3.3	68	6104777	3.3	71
5507760	3.4	104	6008236	3.3	64	6102300	3.3	68	6104778	3.3	71
5507761	3.4	104	6008242	3.3	64	6102310	3.3	68	6104779	3.3	71
5507762	3.4	104	6008248	3.3	64	6102311	3.3	68	6104780	3.3	71
5507763	3.4	104	6010112	3.3	64	6102320	3.3	68	6104816	3.3	72
6000070	3.3	61	6010116	3.3	64	6102321	3.3	68	6104817	3.3	72
6000070	3.4	142	6010120	3.3	64	6102322	3.3	68	6104818	3.3	72
6000096	3.3	61	6010125	3.3	64	6102330	3.3	68	6104819	3.3	72
6000096	3.4	142	6010132	3.3	64	6102331	3.3	68	6104820	3.3	72
6000118	3.3	61	6010140	3.3	64	6102332	3.3	68	6104821	3.3	72
6000118	3.4	142	6010150	3.3	64	6102333	3.3	68	6104824	3.3	72
6000134	3.3	61	6010163	3.3	64	6102340	3.3	68	6104825	3.3	72
6000134	3.4	142	6011007	3.3	63	6102341	3.3	68	6104826	3.3	72
6000169	3.3	61	6011009	3.3	63	6102342	3.3	68	6104830	3.3	72
6000169	3.4	142	6011011	3.3	63	6102350	3.3	68	6104831	3.3	72
6000215	3.3	61	6011013	3.3	63	6102351	3.3	68	6104832	3.3	72
6000215	3.4	142	6011016	3.3	63	6102352	3.3	68	6104833	3.3	72
6000290	3.3	61	6011021	3.3	63	6102360	3.3	68	6104838	3.3	72
6000290	3.4	142	6011029	3.3	63	6102361	3.3	68	6104839	3.3	72
6000363	3.3	61	6011036	3.3	63	6102370	3.3	68	6104840	3.3	72
6000363	3.4	142	6011042	3.3	63	6102371	3.3	68	6104849	3.3	72
6000428	3.3	61	6011048	3.3	63	6102380	3.3	68	6104850	3.3	72
6000428	3.4	142	6011112	3.3	63	6102381	3.3	68	6104862	3.3	72
6000487	3.3	61	6011116	3.3	63	6102400	3.3	69	6104863	3.3	72
6000487	3.4	142	6011120	3.3	63	6102404	3.3	69	6104875	3.3	72
6002005	3.3	62	6011125	3.3	63	6102405	3.3	69	6105010	3.4	147
6002006	3.3	62	6011132	3.3	63	6102409	3.3	69	6105011	3.4	147
6002007	3.3	62	6011140	3.3	63	6102410	3.3	69	6105012	3.4	147
6002008	3.3	62	6011150	3.3	63	6102413	3.3	69	6105013	3.4	147
6002010	3.3	62	6011163	3.3	63	6102414	3.3	69	6105014	3.4	147
6002011	3.3	62	6100015	3.3	70	6102415	3.3	69	6105015	3.4	147
6002012	3.3	62	6100023	3.3	70	6102419	3.3	69	6105016	3.4	147
6004067	3.3	61	6100031	3.3	70	6102420	3.3	69	6105017	3.4	147
6004083	3.3	61	6100040	3.3	70	6102424	3.3	69	6105018	3.4	147
6004105	3.3	61	6100058	3.3	70	6102425	3.3	69	6105019	3.4	147
6004121	3.3	61	6100066	3.3	70	6102429	3.3	69	6105020	3.4	147
6004121	3.4	102	6100074	3.3	70	6102430	3.3	69	6105021	3.4	147
6004121	3.4	103	6100082	3.3	70	6102435	3.3	69	6105022	3.4	147
6004121	3.4	142	6100090	3.3	70	6102450	3.3	69	6105023	3.4	147
6004164	3.3	61	6100104	3.3	70	6102455	3.3	69	6105024	3.4	147
6004164	3.4	102	6100112	3.3	70	6102460	3.3	69	6105025	3.4	147
6004164	3.4	103	6100120	3.3	70	6102464	3.3	69	6105026	3.4	147
6004164	3.4	142	6100139	3.3	70	6102465	3.3	69	6105027	3.4	147
6004165	3.3	61	6100147	3.3	70	6102468	3.3	69	6105028	3.4	147
6004202	3.3	61	6100155	3.3	70	6102469	3.3	69	6105040	3.4	147
6004202	3.4	102	6100163	3.3	70	6102470	3.3	69	6105041	3.4	147
6004202	3.4	103	6100171	3.3	70	6102474	3.3	69	6105042	3.4	147
6004202	3.4	142	6100180	3.3	70	6102475	3.3	69	6105043	3.4	147
6004253	3.3	61	6100198	3.3	70	6102479	3.3	69	6105044	3.4	147
6004253	3.4	102	6100201	3.3	70	6102480	3.3	69	6105045	3.4	147
6004253	3.4	142	6100210	3.3	70	6102484	3.3	69	6105046	3.4	147
6004253	3.4	103	6100333	5.2	45	6102485	3.3	69	6105047	3.4	147
6004326	3.3	61	6100416	3.3	72	6102490	3.3	69	6105048	3.4	147
6004326	3.4	102	6100421	3.3	72	6104106	3.3	69	6105049	3.4	147
6004326	3.4	103	6100429	3.3	72	6104108	3.3	69	6105050	3.4	147
6004326	3.4	142	6102018	3.3	68	6104110	3.3	69	6105051	3.4	147
6004407	3.3	61	6102026	3.3	68	6104206	3.3	69	6105060	3.4	146
6004407	3.4	102	6102030	3.3	68	6104208	3.3	69	6105061	3.4	146
6004407	3.4	103	6102034	3.3	68	6104210	3.3	69	6105062	3.4	146
6004407	3.4	142	6102042	3.3	68	6104212	3.3	69	6105063	3.4	146
6004504	3.4	102	6102050	3.3	68	6104416	3.3	69	6105064	3.4	146
6004504	3.4	103	6102069	3.3	68	6104525	3.3	69	6105065	3.4	146
6004504	3.3	61	6102077	3.3	68	6104632	3.3	69	6105066	3.4	146
6004504	3.4	142	6102085	3.3	68	6104716	3.3	71	6105067	3.4	146
6004636	3.3	61	6102093	3.3	68	6104720	3.3	71	6105068	3.4	146
6004636	3.4	102	6102107	3.3	68	6104725	3.3	71	6105069	3.4	146
6004636	3.4	103	6102115	3.3	68	6104726	3.3	71	6105070	3.4	146
6004636	3.4	142	6102123	3.3	68	6104727	3.3	71	6105071	3.4	146
6004750	3.3	61	6102131	3.3	68	6104732	3.3	71	6105072	3.4	146
6004750	3.4	142	6102140	3.3	68	6104733	3.3	71	6105073	3.4	146
6004752	3.3	61	6102158	3.3	68	6104740	3.3	71	6105074	3.4	146
6004754	3.3	61	6102166	3.3	68	6104750	3.3	71	6105075	3.4	146

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
6105076	3.4	146	6200546	3.4	151	6402728	3.4	158	6500340	2.5	125
6105077	3.4	146	6200547	3.4	151	6402729	3.4	158	6500358	2.5	125
6105078	3.4	146	6200548	3.4	151	6402730	3.4	158	6500366	2.5	125
6105081	3.4	145	6300240	3.3	91	6402731	3.4	158	6500374	2.5	125
6105082	3.4	145	6300241	3.3	91	6402732	3.4	158	6500382	2.5	125
6105083	3.4	145	6300242	3.3	91	6402733	3.4	158	6500390	2.5	125
6105084	3.4	145	6300243	3.3	91	6402734	3.4	158	6500404	2.5	125
6105085	3.4	145	6300244	3.3	91	6402750	3.4	159	6500412	2.5	125
6105086	3.4	145	6303099	3.3	90	6402751	3.4	159	6500420	2.5	125
6105087	3.4	145	6303110	3.3	90	6402752	3.4	159	6500439	2.5	125
6105088	3.4	145	6303137	3.3	90	6402753	3.4	159	6500447	2.5	125
6200010	3.3	74	6303161	3.3	90	6402754	3.4	159	6500455	2.5	125
6200028	3.3	74	6303218	3.3	90	6402755	3.4	159	6500463	2.5	125
6200036	3.3	74	6303293	3.3	90	6402756	3.4	159	6500471	2.5	125
6200044	3.3	74	6303366	3.3	90	6402757	3.4	159	6500480	2.5	125
6200052	3.3	74	6303420	3.3	90	6402758	3.4	159	6500490	2.5	125
6200060	3.3	74	6303480	3.3	90	6402759	3.4	159	6500501	2.5	125
6200079	3.3	74	6303516	3.3	90	6402760	3.4	159	6600077	3.3	80
6200087	3.3	74	6303520	3.3	90	6402761	3.4	159	6600093	3.3	80
6200095	3.3	74	6303525	3.3	90	6402762	3.4	159	6600115	3.3	80
6200109	3.3	74	6303532	3.3	90	6402763	3.4	159	6600131	3.3	80
6200117	3.3	74	6303540	3.3	90	6402764	3.4	159	6600166	3.3	80
6200125	3.3	74	6303550	3.3	90	6402810	3.4	162	6600212	3.3	80
6200212	3.3	75	6303563	3.3	90	6402811	3.4	162	6600298	3.3	80
6200216	3.3	75	6402610	3.4	157	6402812	3.4	162	6600360	3.3	80
6200220	3.3	75	6402611	3.4	157	6402813	3.4	162	6600425	3.3	80
6200225	3.3	75	6402612	3.4	157	6402814	3.4	162	6600484	3.3	80
6200232	3.3	75	6402613	3.4	157	6402815	3.4	162	6600800	3.3	80
6200240	3.3	75	6402614	3.4	157	6402816	3.4	162	6600801	3.3	80
6200250	3.3	75	6402615	3.4	157	6402817	3.4	162	6600802	3.3	80
6200263	3.3	75	6402616	3.4	157	6402818	3.4	162	6600803	3.3	80
6200310	3.3	75	6402617	3.4	157	6402819	3.4	162	6600804	3.3	80
6200312	3.3	75	6402618	3.4	157	6402820	3.4	162	6600805	3.3	80
6200316	3.3	75	6402619	3.4	157	6402821	3.4	162	6600806	3.3	80
6200320	3.3	75	6402620	3.4	157	6402822	3.4	162	6600807	3.3	80
6200325	3.3	75	6402621	3.4	157	6402823	3.4	162	6604658	3.3	79
6200332	3.3	75	6402622	3.4	157	6402824	3.4	162	6604659	3.3	79
6200340	3.3	75	6402623	3.4	157	6402825	3.4	162	6604660	3.3	79
6200350	3.3	75	6402624	3.4	157	6402826	3.4	162	6604661	3.3	79
6200363	3.3	75	6402625	3.4	157	6402827	3.4	162	6604662	3.3	79
6200410	3.3	75	6402626	3.4	157	6402828	3.4	162	6604663	3.3	79
6200412	3.3	75	6402627	3.4	157	6402829	3.4	162	6604664	3.3	79
6200416	3.3	75	6402640	3.4	161	6402830	3.4	162	6604665	3.3	79
6200420	3.3	75	6402641	3.4	161	6402831	3.4	162	6604666	3.3	79
6200425	3.3	75	6402642	3.4	161	6402850	3.4	160	6604667	3.3	79
6200432	3.3	75	6402643	3.4	161	6402851	3.4	160	6604668	3.3	79
6200440	3.3	75	6402644	3.4	161	6402852	3.4	160	6604669	3.3	79
6200450	3.3	75	6402645	3.4	161	6402853	3.4	160	6604670	3.3	79
6200463	3.3	75	6402646	3.4	161	6402854	3.4	160	6604671	3.3	79
6200501	3.4	152	6402647	3.4	161	6402855	3.4	160	6604672	3.3	79
6200502	3.4	152	6402648	3.4	161	6402856	3.4	160	6604673	3.3	79
6200503	3.4	152	6402649	3.4	161	6402857	3.4	160	6604674	3.3	79
6200504	3.4	152	6402650	3.4	161	6402858	3.4	160	6604675	3.3	79
6200505	3.4	152	6402651	3.4	161	6402859	3.4	160	6604676	3.3	79
6200506	3.4	152	6402652	3.4	161	6402860	3.4	160	6604677	3.3	79
6200507	3.4	152	6402653	3.4	161	6402861	3.4	160	6604678	3.3	79
6200508	3.4	152	6402654	3.4	161	6500072	2.5	125	6604679	3.3	79
6200509	3.4	152	6402655	3.4	161	6500102	2.5	125	6604680	3.3	79
6200510	3.4	152	6402656	3.4	161	6500110	2.5	125	6604681	3.3	79
6200512	3.4	152	6402657	3.4	161	6500129	2.5	125	6604682	3.3	79
6200513	3.4	152	6402658	3.4	161	6500137	2.5	125	6604683	3.3	79
6200514	3.4	152	6402659	3.4	161	6500145	2.5	125	6604684	3.3	79
6200515	3.4	152	6402660	3.4	161	6500153	2.5	125	6604685	3.3	79
6200516	3.4	152	6402710	3.4	158	6500161	2.5	125	6604686	3.3	79
6200517	3.4	152	6402711	3.4	158	6500170	2.5	125	6604687	3.3	79
6200518	3.4	152	6402712	3.4	158	6500188	2.5	125	6604688	3.3	79
6200520	3.4	150	6402713	3.4	158	6500196	2.5	125	6604689	3.3	79
6200521	3.4	150	6402714	3.4	158	6500200	2.5	125	6604690	3.3	79
6200522	3.4	150	6402715	3.4	158	6500218	2.5	125	6604691	3.3	79
6200523	3.4	150	6402716	3.4	158	6500226	2.5	125	6604692	3.3	79
6200524	3.4	150	6402717	3.4	158	6500234	2.5	125	6604693	3.3	79
6200525	3.4	150	6402718	3.4	158	6500242	2.5	125	6604694	3.3	79
6200526	3.4	150	6402719	3.4	158	6500250	2.5	125	6604695	3.3	79
6200527	3.4	150	6402720	3.4	158	6500269	2.5	125	6604703	3.3	79
6200528	3.4	150	6402721	3.4	158	6500277	2.5	125	6604704	3.3	79
6200529	3.4	150	6402722	3.4	158	6500285	2.5	125	6604705	3.3	79
6200541	3.4	151	6402723	3.4	158	6500293	2.5	125	6604706	3.3	79
6200542	3.4	151	6402724	3.4	158	6500307	2.5	125	6604707	3.3	79
6200543	3.4	151	6402725	3.4	158	6500315	2.5	125	6604708	3.3	79
6200544	3.4	151	6402726	3.4	158	6500323	2.5	125	6604709	3.3	79
6200545	3.4	151	6402727	3.4	158	6500331	2.5	125	6604712	3.3	79

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
6604713	3.3	79	6606369	3.3	77	6702946	3.4	156	7005075	5.3	56
6604715	3.3	79	6606423	3.3	77	6702947	3.4	156	7005083	3.3	65
6604716	3.3	79	6606482	3.3	77	6702948	3.4	156	7005083	5.3	56
6604717	3.3	79	6700071	3.3	86	6702949	3.4	156	7005091	3.3	65
6604719	3.3	79	6700098	3.3	86	6702950	3.4	156	7005091	5.3	56
6604720	3.3	79	6700110	3.3	86	7001070	5.3	57	7005105	3.3	65
6604721	3.3	79	6700136	3.3	86	7001096	5.1	4	7005113	3.3	65
6604722	3.3	79	6700160	3.3	86	7001096	5.1	8	7005121	3.3	65
6604723	3.3	79	6700217	3.3	86	7001096	5.3	57	7005130	3.3	65
6604724	3.3	79	6700292	3.3	86	7001118	5.1	4	7005148	3.3	65
6604725	3.3	79	6700365	3.3	86	7001118	5.1	8	7005156	3.3	65
6604726	3.3	79	6700420	3.3	86	7001118	5.3	57	7005164	3.3	65
6604727	3.3	79	6700489	3.3	86	7001134	5.3	57	7005172	3.3	65
6604728	3.3	79	6700507	3.3	87	7001169	5.1	4	7005180	3.3	65
6604729	3.3	79	6700509	3.3	87	7001169	5.1	8	7005199	3.3	65
6604730	3.3	79	6700511	3.3	87	7001169	5.3	57	7005202	3.3	65
6604732	3.3	79	6700513	3.3	87	7001215	5.1	4	7005202	5.3	56
6604733	3.3	79	6700516	3.3	87	7001215	5.1	8	7005210	3.3	65
6604734	3.3	79	6700521	3.3	87	7001215	5.3	57	7005210	5.3	56
6604735	3.3	79	6700529	3.3	87	7001290	5.1	4	7005229	3.3	65
6604740	3.3	79	6700536	3.3	87	7001290	5.3	57	7005237	3.3	65
6604741	3.3	79	6700542	3.3	87	7001363	5.3	57	7005245	3.3	65
6604742	3.3	79	6700548	3.3	87	7001428	5.3	57	7005301	3.3	66
6604743	3.3	79	6700612	3.3	87	7001487	5.3	57	7005302	3.3	66
6604750	3.3	79	6700616	3.3	87	7002076	3.3	84	7005303	3.3	66
6604751	3.3	79	6700620	3.3	87	7002092	3.3	84	7005304	3.3	66
6604752	3.3	79	6700625	3.3	87	7002114	3.3	84	7005305	3.3	66
6604753	3.3	79	6700632	3.3	87	7002130	3.3	84	7005306	3.3	66
6604763	3.3	79	6700640	3.3	87	7002165	3.3	84	7005307	3.3	66
6604764	3.3	79	6700650	3.3	87	7002211	3.3	84	7005308	3.3	66
6604770	3.3	76	6700663	3.3	87	7002297	3.3	84	7005309	3.3	66
6604771	3.3	76	6701108	3.3	86	7002360	3.3	84	7005310	3.3	66
6604772	3.3	76	6701116	3.3	86	7002424	3.3	84	7005311	3.3	66
6604773	3.3	76	6701124	3.3	86	7002483	3.3	84	7005312	3.3	66
6604774	3.3	76	6701140	3.3	86	7004200	3.3	73	7005313	3.3	66
6604775	3.3	76	6701205	3.3	86	7004201	3.3	73	7005314	3.3	66
6604776	3.3	76	6701345	3.3	86	7004202	3.3	73	7005315	3.3	66
6604777	3.3	76	6701388	3.3	86	7004203	3.3	73	7005317	3.3	66
6604807	3.3	78	6701582	3.3	86	7004204	3.3	73	7005318	3.3	66
6604808	3.3	78	6701612	3.3	86	7004205	3.3	73	7005319	3.3	66
6604809	3.3	78	6701616	3.3	86	7004206	3.3	73	7005320	3.3	66
6604810	3.3	78	6701620	3.3	86	7004207	3.3	73	7005321	3.3	66
6604811	3.3	78	6701625	3.3	86	7004208	3.3	73	7005322	3.3	66
6604812	3.3	78	6701632	3.3	86	7004300	3.3	73	7005323	3.3	66
6604813	3.3	78	6701640	3.3	86	7004301	3.3	73	7005324	3.3	66
6604814	3.3	78	6701650	3.3	86	7004302	3.3	73	7006012	3.3	99
6604815	3.3	78	6701663	3.3	86	7004303	3.3	73	7006020	3.3	99
6604816	3.3	78	6702610	3.4	155	7004304	3.3	73	7006039	3.3	99
6604817	3.3	78	6702611	3.4	155	7004305	3.3	73	7006047	3.3	99
6604818	3.3	78	6702612	3.4	155	7004306	3.3	73	7006055	3.3	99
6604819	3.3	78	6702613	3.4	155	7004310	3.3	73	7006063	3.3	99
6604820	3.3	78	6702614	3.4	155	7004311	3.3	73	7006071	3.3	99
6604821	3.3	78	6702615	3.4	155	7004312	3.3	73	7006080	3.3	99
6604822	3.3	78	6702616	3.4	155	7004313	3.3	73	7006098	3.3	99
6604823	3.3	78	6702617	3.4	155	7004314	3.3	73	7006101	3.3	99
6604829	3.3	78	6702618	3.4	155	7004315	3.3	73	7006207	3.3	99
6604830	3.3	78	6702651	3.4	155	7004316	3.3	73	7006209	3.3	99
6604831	3.3	78	6702652	3.4	155	7004320	3.3	73	7006211	3.3	99
6604832	3.3	78	6702653	3.4	155	7004321	3.3	73	7006213	3.3	99
6604836	3.3	78	6702654	3.4	155	7004322	3.3	73	7006216	3.3	99
6604837	3.3	78	6702655	3.4	155	7004323	3.3	73	7006229	3.3	99
6604842	3.3	78	6702656	3.4	155	7004324	3.3	73	7006236	3.3	99
6604843	3.3	78	6702657	3.4	155	7004325	3.3	73	7006242	3.3	99
6604848	3.3	78	6702661	3.4	155	7004326	3.3	73	7006248	3.3	99
6604849	3.3	78	6702662	3.4	155	7004401	3.4	149	7006251	3.3	99
6604850	3.3	78	6702663	3.4	155	7004402	3.4	149	7006252	3.3	99
6604863	3.3	78	6702664	3.4	155	7004403	3.4	149	7006253	3.3	99
6604865	3.3	78	6702835	3.3	88	7004404	3.4	149	7006254	3.3	99
6604869	3.3	78	6702836	3.3	88	7005016	3.3	65	7006255	3.3	99
6604872	3.3	78	6702837	3.3	88	7005016	5.3	56	7006257	3.3	99
6604875	3.3	78	6702838	3.3	88	7005024	3.3	65	7006258	3.3	99
6604877	3.3	78	6702839	3.3	88	7005024	5.3	56	7006259	3.3	99
6604879	3.3	78	6702840	3.3	88	7005032	3.3	65	7006812	3.3	92
6604882	3.3	78	6702850	3.3	88	7005032	5.3	56	7006816	3.3	92
6606075	3.3	77	6702863	3.3	88	7005040	3.3	65	7006820	3.3	92
6606091	3.3	77	6702940	3.4	156	7005040	5.3	56	7006825	3.3	92
6606113	3.3	77	6702941	3.4	156	7005059	3.3	65	7006832	3.3	92
6606130	3.3	77	6702942	3.4	156	7005059	5.3	56	7006840	3.3	92
6606164	3.3	77	6702943	3.4	156	7005067	3.3	65	7006850	3.3	92
6606210	3.3	77	6702944	3.4	156	7005067	5.3	56	7006863	3.3	92
6606296	3.3	77	6702945	3.4	156	7005075	3.3	65	7006870	3.3	92

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
7006871	3.3	92	7008804	3.4	144	7211969	3.3	60	7218228	3.4	148
7006872	3.3	92	7008805	3.4	144	7211970	3.3	60	7218262	3.4	143
7006873	3.3	92	7008806	3.4	144	7211971	3.3	60	7218263	3.4	143
7006874	3.3	92	7008807	3.4	144	7211972	3.3	60	7218264	3.4	143
7006875	3.3	92	7008808	3.4	144	7211973	3.3	60	7218265	3.4	143
7006876	3.3	92	7008809	3.4	144	7211974	3.3	60	7218266	3.4	143
7006877	3.3	92	7008810	3.4	144	7211975	3.3	60	7218267	3.4	143
7006880	3.3	92	7008811	3.4	144	7211976	3.3	60	7218268	3.4	143
7006881	3.3	92	7008812	3.4	144	7211977	3.3	60	7302096	3.3	89
7006882	3.3	92	7008813	3.4	144	7211978	3.3	60	7302118	3.3	89
7006883	3.3	92	7008814	3.4	144	7211979	3.3	60	7302134	3.3	89
7006884	3.3	92	7008815	3.4	144	7211980	3.3	60	7302169	3.3	89
7006885	3.3	92	7211485	3.3	60	7211981	3.3	60	7302215	3.3	89
7006886	3.3	92	7211486	3.3	60	7211982	3.3	60	7302290	3.3	89
7006887	3.3	92	7211487	3.3	60	7211983	3.3	60	7302363	3.3	89
7007080	3.4	154	7211488	3.3	60	7211984	3.3	60	7302416	3.3	89
7007081	3.4	154	7211490	3.3	60	7211985	3.3	60	7302420	3.3	89
7007082	3.4	154	7211491	3.3	60	7211986	3.3	60	7302425	3.3	89
7007083	3.4	154	7211492	3.3	60	7211987	3.3	60	7302432	3.3	89
7007084	3.4	154	7211493	3.3	60	7211988	3.3	60	7302440	3.3	89
7007085	3.4	154	7211495	3.3	60	7211989	3.3	60	7302450	3.3	89
7007086	3.4	154	7211496	3.3	60	7211990	3.3	60	7304001	2.2	49
7007087	3.4	154	7211497	3.3	60	7211990	3.4	102	7304002	2.2	49
7007088	3.4	154	7211498	3.3	60	7211990	3.4	103	7304003	2.2	49
7008516	3.3	67	7211707	3.3	60	7211991	3.3	60	7304004	2.2	49
7008519	3.3	67	7211709	3.3	60	7211991	3.4	102	7304006	2.2	49
7008520	3.3	67	7211711	3.3	60	7211991	3.4	103	7304008	2.2	49
7008523	3.3	67	7211713	3.3	60	7211992	3.3	60	7304011	2.2	49
7008524	3.3	67	7211716	3.3	60	7211992	3.4	102	7304015	2.2	49
7008525	3.3	67	7211721	3.3	60	7211992	3.4	103	7304016	2.2	49
7008530	3.3	67	7211729	3.3	60	7215517	3.3	85	7304017	2.2	49
7008531	3.3	67	7211751	3.3	60	7215525	3.3	85	7304021	2.2	49
7008532	3.3	67	7211752	3.3	60	7215533	3.3	85	7304116	2.2	49
7008538	3.3	67	7211753	3.3	60	7215541	3.3	85	7304117	2.2	49
7008539	3.3	67	7211754	3.3	60	7215550	3.3	85	7304118	2.2	49
7008540	3.3	67	7211755	3.3	60	7215568	3.3	85	7304119	2.2	49
7008548	3.3	67	7211756	3.3	60	7215576	3.3	85	7304120	2.2	49
7008549	3.3	67	7211757	3.3	60	7215584	3.3	85	7304121	2.2	49
7008550	3.3	67	7211765	3.3	60	7215592	3.3	85	7304125	2.2	49
7008561	3.3	67	7211766	3.3	60	7215606	3.3	85	7304126	2.2	49
7008562	3.3	67	7211767	3.3	60	7217312	3.3	85	7304127	2.2	49
7008563	3.3	67	7211768	3.3	60	7217316	3.3	85	7304128	2.2	49
7008616	3.3	67	7211769	3.3	60	7217320	3.3	85	7304132	2.2	49
7008619	3.3	67	7211770	3.3	60	7217325	3.3	85	7304133	2.2	49
7008620	3.3	67	7211771	3.3	60	7217332	3.3	85	7304134	2.2	49
7008623	3.3	67	7211807	3.3	60	7217340	3.3	85	7304135	2.2	49
7008624	3.3	67	7211809	3.3	60	7217350	3.3	85	7702950	5.2	40
7008625	3.3	67	7211811	3.3	60	7217363	3.3	85	7702952	5.2	40
7008630	3.3	67	7211813	3.3	60	7217412	3.3	85	7702954	5.2	40
7008631	3.3	67	7211816	3.3	60	7217416	3.3	85	7702959	5.2	38
7008632	3.3	67	7211821	3.3	60	7217420	3.3	85	7702965	5.2	45
7008638	3.3	67	7211829	3.3	60	7217425	3.3	85	7702965	5.2	46
7008639	3.3	67	7211836	3.3	60	7217432	3.3	85	7702965	5.2	44
7008640	3.3	67	7211842	3.3	60	7217440	3.3	85	7702973	5.2	45
7008648	3.3	67	7211848	3.3	60	7217450	3.3	85	7702973	5.2	46
7008649	3.3	67	7211851	3.3	60	7217463	3.3	85	7702973	5.2	44
7008650	3.3	67	7211852	3.3	60	7217512	3.3	85	7702974	5.2	49
7008661	3.3	67	7211853	3.3	60	7217516	3.3	85	7702975	5.2	49
7008662	3.3	67	7211854	3.3	60	7217520	3.3	85	7702976	5.2	49
7008663	3.3	67	7211855	3.3	60	7217525	3.3	85	7702979	5.2	49
7008716	3.3	67	7211856	3.3	60	7217532	3.3	85	7702980	5.2	49
7008719	3.3	67	7211857	3.3	60	7217540	3.3	85	7702990	5.2	49
7008720	3.3	67	7211858	3.3	60	7217550	3.3	85	7702991	5.2	49
7008723	3.3	67	7211859	3.3	60	7217563	3.3	85	7702993	5.2	49
7008724	3.3	67	7211860	3.3	60	7217701	3.1	10	7702994	5.2	49
7008725	3.3	67	7211881	3.3	60	7217702	3.1	10	7704461	5.2	41
7008730	3.3	67	7211882	3.3	60	7217703	3.1	10	7704484	5.2	29
7008731	3.3	67	7211883	3.3	60	7218112	3.4	153	7704489	5.2	29
7008732	3.3	67	7211884	3.3	60	7218116	3.4	153	7704489	5.2	41
7008738	3.3	67	7211885	3.3	60	7218120	3.4	153	7704497	5.2	29
7008739	3.3	67	7211886	3.3	60	7218125	3.4	153	7704497	5.2	39
7008740	3.3	67	7211887	3.3	60	7218132	3.4	153	7704501	5.2	41
7008748	3.3	67	7211888	3.3	60	7218140	3.4	153	7705204	5.2	48
7008749	3.3	67	7211889	3.3	60	7218150	3.4	153	7705208	5.2	48
7008750	3.3	67	7211890	3.3	60	7218163	3.4	153	7705541	5.2	48
7008761	3.3	67	7211960	3.3	60	7218222	3.4	148	7705543	5.2	48
7008762	3.3	67	7211961	3.3	60	7218223	3.4	148	7705544	5.2	48
7008763	3.3	67	7211962	3.3	60	7218224	3.4	148	7705549	5.2	48
7008801	3.4	144	7211963	3.3	60	7218225	3.4	148	7705569	5.2	48
7008802	3.4	144	7211964	3.3	60	7218226	3.4	148	7777001	2.3	106
7008803	3.4	144	7211965	3.3	60	7218227	3.4	148	7777002	2.3	106

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
7800002	5.1	8	7805252	5.2	29	7807022	2.3	109	7807260	5.2	36
7800010	5.1	8	7805252	5.2	18	7807023	2.3	108	7807260	5.3	54
7800010	5.4	69	7805253	5.2	29	7807025	2.3	108	7807263	2.3	110
7800029	5.1	8	7805253	5.2	18	7807027	2.3	108	7807263	5.2	17
7800029	5.4	69	7805255	5.2	29	7807029	2.3	108	7807263	5.2	18
7800045	5.1	8	7805255	5.2	19	7807031	2.3	108	7807265	2.3	110
7800053	5.1	12	7806051	5.2	33	7807035	2.3	106	7807266	2.3	110
7800061	5.1	11	7806053	5.2	29	7807036	2.3	107	7807270	2.5	118
7800063	5.2	43	7806053	5.2	19	7807037	2.3	106	7807271	2.3	109
7800064	5.2	43	7806070	2.3	108	7807038	2.3	107	7807272	2.5	118
7800096	5.1	6	7806071	2.3	108	7807039	2.3	107	7807276	2.5	118
7800100	5.1	5	7806072	2.3	110	7807040	2.3	107	7807278	2.5	118
7800118	5.1	5	7806073	2.3	110	7807041	2.3	107	7807280	2.5	118
7800126	5.1	6	7806075	2.3	108	7807042	2.3	106	7807282	2.5	118
7800134	5.1	5	7806076	2.3	108	7807043	2.3	106	7807283	2.5	118
7800207	5.1	9	7806086	5.2	32	7807045	2.3	107	7807288	2.5	118
7800215	5.1	10	7806116	2.3	109	7807062	2.3	108	7807289	2.5	118
7800223	5.1	10	7806248	5.2	29	7807063	2.3	106	7807290	2.5	118
7800231	5.1	10	7806248	5.2	18	7807064	2.3	109	7807291	2.5	118
7800240	5.1	9	7806249	5.2	29	7807066	2.3	106	7807292	2.5	118
7800258	5.1	9	7806249	5.2	18	7807067	2.3	107	7807293	2.5	118
7800266	5.1	12	7806252	5.2	29	7807068	2.3	107	7807294	2.5	118
7800274	5.1	12	7806252	5.2	19	7807069	2.3	109	7807295	2.5	118
7800282	5.1	11	7806388	5.2	32	7807071	2.3	109	7807296	2.5	118
7800290	5.1	13	7806390	5.2	29	7807072	2.3	109	7807297	2.5	118
7800304	5.1	13	7806390	5.2	21	7807073	2.3	109	7807299	2.5	118
7800312	5.1	9	7806391	5.2	29	7807074	2.3	110	7807320	2.5	118
7800342	5.3	64	7806391	5.2	21	7807075	2.3	106	7807339	2.5	118
7800347	5.4	69	7806500	2.3	109	7807078	2.3	109	7807341	5.2	25
7800371	5.4	68	7806560	2.3	108	7807079	2.3	109	7807341	5.2	38
7800380	5.4	68	7806570	2.3	106	7807086	2.3	107	7807341	5.2	36
7800398	5.4	68	7806581	2.3	108	7807088	2.3	107	7807341	5.3	54
7800401	5.4	69	7806583	2.3	108	7807090	2.3	109	7807368	5.4	66
7800410	5.4	72	7806584	2.3	109	7807102	2.3	109	7807377	5.3	64
7800428	5.4	72	7806587	2.3	108	7807104	2.3	108	7807380	5.2	42
7800509	5.4	68	7806589	2.3	108	7807111	2.3	108	7807393	2.5	119
7800517	5.4	68	7806590	2.3	107	7807118	2.3	107	7807395	2.5	119
7800525	5.4	68	7806600	2.3	108	7807120	2.3	106	7807397	2.5	119
7800533	5.4	70	7806610	2.3	107	7807128	2.3	106	7807398	2.5	119
7800541	5.4	70	7806625	2.3	108	7807131	2.3	108	7807399	2.5	119
7800550	5.4	70	7806629	2.3	110	7807143	2.3	109	7807400	2.5	119
7800568	5.4	70	7806630	2.3	110	7807163	5.2	34	7807401	2.5	119
7800576	5.4	71	7806750	2.3	107	7807163	5.3	54	7807403	2.5	119
7800584	5.4	71	7806751	2.3	107	7807169	2.3	108	7807404	2.3	110
7800592	5.2	44	7806759	2.3	110	7807172	2.3	106	7807406	5.3	53
7800593	5.2	44	7806780	2.3	107	7807173	2.3	106	7807408	5.3	53
7800606	5.4	70	7806790	2.3	109	7807174	2.3	108	7807450	2.3	107
7800615	5.2	46	7806793	2.3	108	7807175	2.3	109	7807467	2.3	108
7800615	5.2	47	7806794	2.3	108	7807176	2.3	109	7807468	2.3	108
7800622	5.2	46	7806795	2.3	108	7807177	2.3	110	7807480	2.3	108
7800622	5.2	47	7806796	2.3	108	7807178	2.3	107	7807490	2.3	106
7800630	5.2	46	7806801	2.3	108	7807179	2.3	109	7807491	2.3	107
7800630	5.2	47	7806803	2.3	108	7807180	2.3	110	7807492	2.3	107
7800665	5.2	47	7806806	2.3	108	7807181	2.3	107	7807497	2.3	107
7800665	5.2	45	7806807	2.3	108	7807182	2.3	107	7807498	2.3	107
7800673	5.2	47	7806808	2.3	108	7807183	2.3	110	7807500	5.3	63
7800673	5.2	45	7806853	2.3	109	7807184	2.3	107	7807502	5.3	63
7800681	5.2	47	7806860	2.3	108	7807185	2.3	106	7807506	5.3	63
7800681	5.2	45	7806861	2.3	106	7807186	2.3	109	7807508	5.3	63
7800704	5.2	46	7806863	2.3	109	7807187	2.5	118	7807510	5.3	63
7800704	5.2	47	7806864	2.3	109	7807188	2.3	106	7807512	5.3	63
7800711	5.2	47	7806867	2.3	108	7807190	2.3	107	7807514	5.3	63
7800711	5.2	45	7806869	2.3	109	7807192	2.3	106	7807521	2.3	108
7800738	5.2	46	7806870	2.3	109	7807194	2.3	106	7807522	2.3	108
7800738	5.2	47	7806874	2.3	109	7807196	2.3	107	7807600	2.3	107
7800784	5.2	49	7806880	2.3	107	7807198	2.3	107	7807601	2.3	107
7800785	5.2	49	7806910	2.3	109	7807199	2.3	106	7807602	2.3	106
7800786	5.2	49	7806912	2.3	109	7807199	2.3	108	7807602	2.3	107
7800983	5.4	66	7806914	2.3	108	7807203	2.3	108	7807604	2.5	119
7801009	5.2	29	7806915	2.3	109	7807207	2.3	108	7807605	2.5	118
7801017	5.2	29	7806917	2.3	109	7807228	2.3	109	7807606	2.3	107
7804016	5.4	70	7806925	2.3	109	7807244	2.3	108	7807608	2.3	109
7805039	5.2	42	7806940	2.3	108	7807246	2.3	108	7807609	2.3	109
7805039	5.2	43	7806980	2.3	108	7807247	2.3	106	7807611	2.3	109
7805047	5.2	31	7806981	2.3	108	7807249	2.3	106	7807612	2.3	109
7805056	5.2	29	7806995	2.3	108	7807259	5.2	25	7807622	2.3	107
7805056	5.2	19	7807001	2.3	107	7807259	5.2	38	7807623	2.3	109
7805080	5.2	32	7807002	2.3	107	7807259	5.2	36	7807624	2.3	108
7805080	5.2	33	7807003	2.3	106	7807259	5.3	54	7807625	2.3	109
7805098	5.2	32	7807010	2.3	109	7807260	5.2	25	7807626	2.3	110
7805098	5.2	33	7807018	2.3	109	7807260	5.2	38	7807628	2.3	106

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
7807629	2.3	108	7807784	2.3	109	7812167	5.2	34	8101167	3.2	57
7807634	2.3	109	7807786	2.3	108	7812167	5.2	35	8101213	3.2	57
7807636	2.3	109	7807787	2.3	108	7812210	5.2	29	8101299	3.2	57
7807637	2.3	109	7807788	2.3	108	7812210	5.2	23	8101361	3.2	57
7807638	2.3	108	7807789	2.3	107	7812210	5.2	24	8101421	3.2	57
7807639	2.3	110	7807790	2.3	107	7812213	5.2	36	8101485	3.2	57
7807640	2.3	107	7807791	2.3	106	7812213	5.2	37	8101516	3.2	57
7807642	2.3	110	7807792	2.3	107	7812218	5.2	25	8101520	3.2	57
7807643	2.3	109	7807794	2.3	107	7812218	5.2	26	8101525	3.2	57
7807644	2.3	109	7807795	2.3	108	7812218	5.2	29	8101532	3.2	57
7807649	2.3	107	7807797	2.3	108	7812221	5.2	36	8101540	3.2	57
7807650	2.3	107	7807806	2.3	109	7812221	5.2	37	8101550	3.2	57
7807651	2.3	109	7807810	2.3	109	7812226	5.2	25	8101563	3.2	57
7807652	2.3	109	7807820	2.3	107	7812226	5.2	26	8103011	3.3	95
7807653	2.3	106	7807831	2.3	108	7812226	5.2	29	8103020	3.3	95
7807654	2.5	118	7807832	2.3	107	7812370	5.2	38	8103038	3.3	95
7807655	2.3	108	7807833	2.3	106	7812370	5.2	39	8103054	3.3	95
7807656	2.3	106	7807834	2.3	110	7813015	5.2	32	8103062	3.3	95
7807657	2.3	106	7807835	2.3	109	7813015	5.2	21	8103070	3.3	95
7807660	2.3	107	7807836	2.3	107	7813015	5.2	22	8103089	3.3	95
7807661	2.3	107	7807840	2.3	109	7813032	5.2	22	8103097	3.3	95
7807662	2.3	107	7807841	2.3	109	7813032	5.2	32	8103119	3.3	95
7807663	2.3	106	7807850	5.2	23	7813032	5.2	21	8103127	3.3	95
7807664	2.3	107	7807851	2.3	23	7814009	5.2	38	8103135	3.3	95
7807665	2.3	110	7810164	5.2	34	7814011	5.2	42	8103143	3.3	95
7807665	5.2	17	7810164	5.3	60	7814011	5.2	43	8103151	3.3	95
7807665	5.2	18	7810210	5.2	36	7814012	5.2	40	8103160	3.3	95
7807666	2.3	110	7810210	5.3	60	7814038	5.2	38	8103186	3.3	95
7807666	5.2	17	7810377	5.2	38	7814039	5.2	40	8103194	3.3	95
7807667	2.3	107	7810377	5.3	60	7814045	5.2	28	8103208	3.3	95
7807668	2.3	110	7810385	5.2	38	7814046	5.2	28	8103216	3.3	95
7807670	2.3	106	7810385	5.3	61	7814047	5.2	28	8103232	3.3	95
7807671	2.3	107	7810393	5.2	36	7814048	5.2	28	8103240	3.3	95
7807673	2.3	108	7810393	5.3	61	7814049	5.2	28	8103259	3.3	95
7807676	2.3	106	7810394	5.2	34	7814050	5.2	28	8103283	3.3	95
7807678	5.2	17	7810394	5.3	61	7814051	5.2	28	8103356	3.3	95
7807679	2.3	109	7810400	5.2	23	7814052	5.2	28	8107092	3.3	96
7807680	2.3	109	7810400	5.2	34	7814053	5.2	28	8107114	3.3	96
7807681	2.3	109	7810400	5.3	62	7814054	5.2	28	8107130	3.3	96
7807682	2.3	106	7810401	5.2	36	7814123	5.2	28	8107165	3.3	96
7807683	2.3	106	7810401	5.3	62	7814124	5.2	28	8107211	3.3	96
7807684	2.3	109	7810402	5.2	38	7814125	5.2	28	8107297	3.3	96
7807685	2.3	106	7810402	5.3	62	7814126	5.2	28	8107360	3.3	96
7807686	2.3	107	7810403	5.2	25	7814128	5.2	28	8107424	3.3	96
7807687	2.3	107	7810403	5.3	62	7814129	5.2	28	8107483	3.3	96
7807688	2.3	107	7811100	5.2	29	7814130	5.2	28	8110026	3.3	97
7807690	2.3	110	7811100	5.2	23	7814135	5.2	28	8110050	3.3	97
7807692	2.3	107	7811100	5.2	24	7814136	5.2	28	8110085	3.3	97
7807693	2.3	107	7811110	5.2	29	7814137	5.2	28	8110093	3.3	97
7807694	2.3	109	7811110	5.2	23	7814138	5.2	28	8110107	3.3	97
7807695	2.3	108	7811110	5.2	24	7814140	5.2	28	8110115	3.3	97
7807697	2.5	118	7811160	5.2	34	7814141	5.2	28	8110123	3.3	97
7807698	2.5	118	7811160	5.2	35	7814145	5.2	28	8110131	3.3	97
7807699	2.3	107	7811163	5.2	34	7814146	5.2	28	8110166	3.3	97
7807700	2.3	107	7811163	5.2	35	7814147	5.2	28	8110174	3.3	97
7807710	2.3	109	7811200	5.2	29	7814148	5.2	28	8110182	3.3	97
7807711	2.3	107	7811200	5.2	23	7815035	5.2	40	8110190	3.3	97
7807723	2.3	107	7811200	5.2	24	7815036	5.2	40	8110204	3.3	97
7807727	2.3	109	7811217	5.2	36	7815045	5.2	28	8112070	3.3	93
7807729	2.3	109	7811217	5.2	37	7815046	5.2	28	8112096	3.3	93
7807730	2.3	106	7811222	5.2	25	7815047	5.2	28	8112118	3.3	93
7807760	2.3	109	7811222	5.2	26	7815048	5.2	28	8112134	3.3	93
7807761	2.5	118	7811222	5.2	29	7815049	5.2	28	8112169	3.3	93
7807762	2.3	107	7811225	5.2	36	7815050	5.2	28	8112215	3.3	93
7807763	2.3	107	7811225	5.2	37	7815051	5.2	28	8112250	3.3	93
7807764	2.3	107	7811230	5.2	25	7815052	5.2	28	8112290	3.3	93
7807765	2.5	118	7811230	5.2	26	7815053	5.2	28	8112320	3.3	93
7807766	2.5	118	7811230	5.2	29	7815054	5.2	28	8112363	3.3	93
7807767	2.3	107	7811373	5.2	38	7894050	2.3	106	8112400	3.3	93
7807768	2.3	107	7811373	5.2	39	7895000	5.4	68	8112428	3.3	93
7807768	2.3	108	7811375	5.2	29	7895006	5.4	71	8112495	5.2	42
7807769	2.3	106	7811375	5.2	27	7895007	5.4	71	8112495	5.2	43
7807771	2.3	107	7811377	5.2	29	7895008	5.4	71	8112500	3.3	93
7807773	2.3	107	7812100	5.2	29	7895009	5.4	71	8112630	3.3	93
7807775	2.3	106	7812100	5.2	23	7895010	5.4	71	8112675	3.3	93
7807776	2.3	109	7812100	5.2	24	7895011	5.4	71	8112800	2.2	43
7807778	2.3	106	7812110	5.2	29	7895017	5.5	86	8112801	2.2	43
7807779	2.3	109	7812110	5.2	23	8101078	3.2	57	8112802	2.2	43
7807780	2.3	108	7812110	5.2	24	8101094	3.2	57	8112803	2.2	43
7807781	2.3	108	7812162	5.2	34	8101116	3.2	57	8112804	2.2	43
7807783	2.3	106	7812162	5.2	35	8101132	3.2	57	8112805	2.2	43

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
8112806	2.2	43	8113647	5.2	30	8117136	5.1	4	8221250	2.5	120
8112807	2.2	43	8113647	5.2	45	8117136	5.1	8	8221251	2.5	120
8112808	2.2	43	8113647	5.2	46	8117136	5.1	11	8221252	2.5	120
8112809	2.2	43	8113647	5.1	4	8117136	5.1	12	8221253	2.5	120
8112810	2.2	43	8113647	5.2	42	8117136	5.2	22	8221254	2.5	120
8112811	2.2	43	8113647	5.2	44	8117136	5.3	59	8221255	2.5	120
8112812	2.2	43	8113647	5.3	59	8117179	5.2	25	8221256	2.5	120
8112813	2.2	43	8113648	5.1	4	8117179	5.2	38	8221350	2.5	120
8112814	2.2	43	8113648	5.3	59	8117179	2.2	50	8221351	2.5	120
8113010	5.1	4	8114200	3.1	10	8117179	5.1	4	8221352	2.5	120
8113010	5.1	13	8114201	3.1	10	8117179	5.1	5	8221353	2.5	120
8113010	5.3	57	8114202	3.1	10	8117179	5.1	6	8221354	2.5	120
8113017	5.1	4	8114203	3.1	10	8117179	5.1	8	8221355	2.5	120
8113017	5.1	8	8114204	3.1	10	8117179	5.1	10	8221356	2.5	120
8113017	5.3	57	8114205	3.1	10	8117179	5.1	12	8221400	2.5	120
8113025	5.3	57	8114206	3.1	10	8117179	5.1	13	8221401	2.5	120
8113041	5.1	4	8114207	3.1	10	8117179	5.2	36	8221570	2.2	44
8113041	5.1	8	8114208	3.1	10	8117179	5.3	59	8221571	2.2	44
8113041	5.1	9	8114209	3.1	10	8117225	2.2	50	8221572	2.2	44
8113041	5.1	10	8114210	3.1	10	8117225	5.1	4	8221573	2.2	44
8113041	5.3	57	8114211	3.1	10	8117225	5.1	6	8320440	2.5	128
8113050	5.1	10	8114212	3.1	10	8117225	5.1	8	8320441	2.5	128
8113050	5.1	13	8114215	3.1	10	8117225	5.1	10	8320443	2.5	128
8113050	5.3	57	8114250	3.1	10	8117225	5.1	11	8320444	2.5	128
8113068	5.1	4	8114251	3.1	10	8117225	5.2	25	8320446	2.5	128
8113068	5.1	8	8114252	3.1	10	8117225	5.2	34	8320447	2.5	128
8113068	5.3	57	8114523	3.1	10	8117225	5.2	36	8330100	2.5	127
8113084	5.1	9	8115010	3.3	98	8117225	5.2	38	8330101	2.5	127
8113084	5.1	10	8115028	3.3	98	8117225	5.3	59	8330102	2.5	127
8113084	5.3	57	8115036	3.3	98	8117233	2.2	50	8330103	2.5	127
8113092	5.1	9	8115044	3.3	98	8117233	5.1	4	8330104	2.5	127
8113092	5.3	57	8115052	3.3	98	8117233	5.3	59	8330105	2.5	127
8113130	5.4	72	8115060	3.3	98	8117292	5.2	25	8330106	2.5	127
8113301	3.3	94	8115079	3.3	98	8117292	5.2	38	8330107	2.5	127
8113301	3.4	163	8115087	3.3	98	8117292	2.2	50	8330108	2.5	127
8113302	3.3	94	8115095	3.3	98	8117292	5.1	4	8330109	2.5	127
8113302	3.4	163	8115109	3.3	98	8117292	5.2	36	8330110	2.5	127
8113303	3.3	94	8115150	3.3	98	8117292	5.3	59	8330111	2.5	127
8113303	3.4	163	8115151	3.3	98	8118094	5.1	4	8330112	2.5	127
8113304	3.3	94	8115152	3.3	98	8118094	5.3	56	8330113	2.5	127
8113304	3.4	163	8115153	3.3	98	8118132	5.1	4	8330114	2.5	127
8113305	3.3	94	8115154	3.3	98	8118132	5.3	56	8330115	2.5	127
8113305	3.4	163	8115155	3.3	98	8118175	5.1	4	8330116	2.5	127
8113306	3.3	94	8115156	3.3	98	8118175	5.3	56	8330117	2.5	127
8113306	3.4	163	8115157	3.3	98	8118221	5.1	4	8330118	2.5	127
8113307	3.3	94	8115508	5.2	30	8118221	5.3	56	8330119	2.5	127
8113307	3.4	163	8115508	5.3	58	8211000	2.5	124	8330120	2.5	127
8113308	3.3	94	8115516	5.2	30	8211019	2.5	124	8330121	2.5	127
8113308	3.4	163	8115516	5.3	58	8211027	2.5	124	8330122	2.5	127
8113309	3.3	94	8115530	5.1	7	8211035	2.5	124	8330123	2.5	127
8113309	3.4	163	8115531	5.1	7	8211043	2.5	124	8330124	2.5	127
8113310	3.3	94	8115532	5.1	7	8211060	2.5	124	8330125	2.5	127
8113310	3.4	163	8115540	5.1	7	8211086	2.5	124	8330126	2.5	127
8113319	5.1	12	8115541	5.1	7	8211094	2.5	124	8330127	2.5	127
8113319	5.3	57	8115605	5.2	30	8211108	2.5	124	8330128	2.5	127
8113327	5.1	12	8115605	5.3	58	8211116	2.5	124	8330129	2.5	127
8113327	5.3	57	8117080	5.2	30	8211124	2.5	124	8330130	2.5	127
8113352	5.3	57	8117080	5.2	31	8211140	2.5	124	8330150	2.5	127
8113416	5.3	57	8117080	2.2	50	8211159	2.5	124	8330151	2.5	127
8113424	5.2	32	8117080	5.1	4	8211191	2.5	124	8330152	2.5	127
8113424	5.2	33	8117080	5.3	59	8211205	2.5	124	8330153	2.5	127
8113424	5.3	57	8117101	5.2	31	8213055	2.5	124	8330154	2.5	127
8113490	3.3	94	8117101	5.2	32	8213127	2.5	124	8330155	2.5	127
8113490	3.4	163	8117101	5.2	33	8221050	2.5	120	8330156	2.5	127
8113492	3.3	94	8117101	5.2	45	8221051	2.5	120	8330157	2.5	127
8113492	3.4	163	8117101	5.2	46	8221052	2.5	120	8330158	2.5	127
8113493	3.3	94	8117101	2.2	50	8221053	2.5	120	8330159	2.5	127
8113493	3.4	163	8117101	5.1	4	8221054	2.5	120	8330200	2.5	127
8113494	3.3	94	8117101	5.1	5	8221055	2.5	120	8330201	2.5	127
8113494	3.4	163	8117101	5.1	6	8221056	2.5	120	8330202	2.5	127
8113495	3.3	94	8117101	5.1	8	8221057	2.5	120	8330203	2.5	127
8113495	3.4	163	8117101	5.1	9	8221058	2.5	120	8330204	2.5	127
8113496	3.3	94	8117101	5.1	12	8221150	2.5	120	8330205	2.5	127
8113496	3.4	163	8117101	5.2	28	8221151	2.5	120	8330206	2.5	127
8113497	3.3	94	8117101	5.2	30	8221152	2.5	120	8330207	2.5	127
8113497	3.4	163	8117101	5.2	42	8221153	2.5	120	8330208	2.5	127
8113498	3.3	94	8117101	5.2	43	8221154	2.5	120	8330209	2.5	127
8113498	3.4	163	8117101	5.2	44	8221155	2.5	120	8330210	2.5	127
8113646	5.2	32	8117101	5.3	59	8221156	2.5	120	8330211	2.5	127
8113646	5.2	33	8117136	5.2	33	8221157	2.5	120	8330212	2.5	127
8113646	5.3	59	8117136	2.2	50	8221158	2.5	120	8330213	2.5	127

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
8330214	2.5	127	9203508	3.4	140	9800376	5.2	16	9800905	5.2	25
8330215	2.5	127	9203509	3.4	140	9800377	5.2	16	9800905	5.2	38
8330216	2.5	127	9203510	3.4	140	9800384	5.2	16	9800905	5.1	4
8330217	2.5	127	9203511	3.4	140	9800385	5.2	16	9800905	5.1	6
8330218	2.5	127	9203512	3.4	140	9800386	5.2	16	9800905	5.1	8
8330219	2.5	127	9500020	5.2	50	9800387	5.2	16	9800905	5.1	10
8330220	2.5	127	9500057	5.5	87	9800530	2.2	50	9800905	5.1	11
8330221	2.5	127	9500065	5.5	87	9800557	5.2	44	9800905	5.2	34
8330222	2.5	127	9500073	5.5	87	9800573	5.2	33	9800905	5.2	36
8330223	2.5	127	9500099	5.2	50	9800575	5.2	29	9800905	5.3	55
8330224	2.5	127	9500100	5.2	50	9800575	5.2	22	9800913	2.2	50
8330225	2.5	127	9500197	5.5	82	9800576	5.2	29	9800921	5.1	4
8330226	2.5	127	9500198	5.5	82	9800576	5.2	22	9800921	5.3	52
8330227	2.5	127	9500316	5.5	86	9800581	5.2	42	9800930	5.3	52
8330228	2.5	127	9500324	5.5	86	9800581	5.2	43	9800956	5.2	33
8330229	2.5	127	9500332	5.5	86	9800582	5.2	42	9800956	5.1	4
8330230	2.5	127	9500340	5.5	86	9800582	5.2	43	9800956	5.1	8
8330250	2.5	127	9500586	5.5	74	9800590	5.2	42	9800956	5.1	11
8330251	2.5	127	9500588	5.5	74	9800591	5.2	42	9800956	5.1	12
8330252	2.5	127	9500596	5.5	81	9800603	5.2	32	9800956	5.2	22
8330253	2.5	127	9500627	5.5	84	9800603	5.2	33	9800956	5.3	55
8330254	2.5	127	9500642	5.5	83	9800603	5.2	46	9800964	2.2	50
8330255	2.5	127	9500643	5.5	83	9800611	5.2	32	9800972	5.1	4
8330256	2.5	127	9500646	5.5	83	9800611	5.2	33	9800972	5.1	8
8330257	2.5	127	9500693	5.5	79	9800611	5.2	46	9800972	5.3	52
8330258	2.5	127	9500955	5.5	85	9800617	5.2	29	9800999	5.2	44
8330259	2.5	127	9501189	5.5	84	9800617	5.2	20	9801006	5.1	9
8500096	2.5	126	9501436	5.5	78	9800662	2.2	50	9801006	5.3	53
8500118	2.5	126	9501614	5.5	86	9800680	5.2	29	9801014	5.1	9
8500134	2.5	126	9502106	5.5	83	9800680	5.2	20	9801014	5.3	53
8500169	2.5	126	9502564	5.5	79	9800681	5.2	29	9801022	5.1	9
8500215	2.5	126	9502574	5.5	79	9800681	5.2	20	9801022	5.3	53
8500290	2.5	126	9502590	5.5	79	9800682	5.2	29	9801028	5.3	53
8500363	2.5	126	9503669	5.5	80	9800682	5.2	20	9801029	5.3	53
8500428	2.5	126	9504667	5.5	80	9800685	5.2	20	9801030	5.1	10
8500487	2.5	126	9505045	5.5	75	9800689	5.2	32	9801030	5.3	53
8501033	2.5	126	9505049	5.5	75	9800689	5.2	33	9801049	5.1	10
8501068	2.5	126	9505200	5.5	77	9800689	5.2	36	9801049	5.3	53
8501076	2.5	126	9505400	5.5	77	9800689	5.2	45	9801057	5.1	10
8713187	2.5	122	9505410	5.5	77	9800689	5.2	46	9801057	5.3	53
8713188	2.5	122	9505420	5.5	77	9800689	5.3	55	9801065	5.1	13
8713189	2.5	122	9508010	5.5	80	9800689	5.1	4	9801065	5.3	52
8713190	2.5	122	9509010	5.5	80	9800689	5.1	5	9801073	5.1	13
8713195	2.5	122	9510001	5.5	78	9800689	5.1	6	9801073	5.3	52
8713196	2.5	122	9530177	5.2	49	9800689	5.1	8	9801079	5.3	53
9000020	3.1	54	9530178	5.2	49	9800689	5.1	9	9801080	5.3	53
9000025	3.1	54	9530179	5.2	49	9800689	5.1	12	9801081	5.1	12
9000030	3.1	54	9530184	5.2	49	9800689	5.2	28	9801081	5.3	53
9000151	2.1	38	9530185	5.2	49	9800689	5.2	42	9801082	5.3	53
9000152	2.1	38	9532927	5.5	83	9800689	5.2	43	9801083	5.3	53
9000153	2.1	38	9533649	5.5	76	9800689	5.2	44	9801090	5.1	12
9000154	2.1	38	9533657	5.5	76	9800697	5.2	25	9801090	5.3	53
9000156	2.1	38	9533667	5.5	76	9800697	5.2	38	9801103	5.1	12
9000160	2.1	38	9533675	5.5	76	9800697	5.3	55	9801103	5.3	53
9000163	2.1	38	9533701	5.5	76	9800697	5.1	4	9801111	5.3	53
9000170	2.1	38	9800300	5.2	17	9800697	5.1	5	9801120	5.1	11
9001450	2.1	38	9800301	5.2	17	9800697	5.1	6	9801120	5.3	53
9001451	2.1	38	9800302	5.2	17	9800697	5.1	8	9801121	5.3	53
9001515	2.1	37	9800303	5.2	17	9800697	5.1	10	9801122	5.3	53
9001524	2.1	37	9800310	5.2	17	9800697	5.1	12	9801138	5.2	25
9001527	2.1	37	9800311	5.2	17	9800697	5.1	13	9801138	5.2	38
9001530	2.1	37	9800312	5.2	17	9800700	5.1	6	9801138	5.1	4
9001533	2.1	37	9800313	5.2	17	9800719	5.1	5	9801138	5.2	36
9001534	2.1	37	9800320	5.2	16	9800727	5.1	5	9801138	5.3	55
9001537	2.1	37	9800321	5.2	16	9800735	5.1	6	9801154	2.2	50
9001539	2.1	37	9800322	5.2	16	9800751	5.1	4	9801162	5.1	11
9001540	2.1	37	9800323	5.2	16	9800751	5.1	8	9801162	5.3	53
9001542	2.1	37	9800330	5.2	16	9800751	5.3	52	9801170	5.1	9
9001543	2.1	37	9800331	5.2	16	9800760	5.1	5	9801170	5.3	53
9001544	2.1	37	9800332	5.2	16	9800778	5.1	4	9801189	5.1	4
9001545	2.1	37	9800333	5.2	16	9800778	5.3	52	9801189	5.3	52
9001550	2.1	37	9800340	5.2	16	9800786	5.2	42	9801243	5.1	4
9001552	2.1	37	9800341	5.2	16	9800787	5.2	42	9801243	5.3	52
9001555	2.1	37	9800342	5.2	16	9800794	5.2	45	9801251	5.1	4
9001558	2.1	37	9800343	5.2	16	9800808	5.2	45	9801251	5.3	55
9001561	2.1	37	9800350	5.2	16	9800859	5.1	4	9801260	5.1	4
9001564	2.1	37	9800351	5.2	16	9800859	5.1	8	9801260	5.3	52
9001567	2.1	37	9800352	5.2	16	9800867	5.1	4	9801278	5.1	4
9203505	3.4	140	9800353	5.2	16	9800867	5.1	8	9801278	5.3	52
9203506	3.4	140	9800374	5.2	16	9800867	5.3	52	9801286	5.1	4
9203507	3.4	140	9800375	5.2	16	9800891	5.3	55	9801286	5.3	52

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
9801308	5.1	4	9805913	2.5	122	9806109	2.3	98	9806300	2.3	100
9801308	5.3	52	9805914	2.5	122	9806110	2.3	98	9806301	2.3	98
9801324	5.2	30	9805915	2.5	124	9806111	2.3	97	9806302	2.3	100
9801324	5.2	31	9805916	2.5	122	9806112	2.3	98	9806304	2.3	100
9801324	5.1	4	9805917	2.5	122	9806113	2.3	98	9806307	2.3	98
9801324	5.3	55	9805925	2.5	122	9806114	2.3	98	9807391	2.5	119
9801340	5.3	52	9805935	2.5	121	9806115	2.3	99	9810045	2.3	96
9801700	5.1	7	9805936	2.5	121	9806116	2.3	99	9810075	2.3	96
9801701	5.1	7	9805938	2.5	121	9806117	2.3	99	9810100	2.3	96
9801702	5.1	7	9805939	2.5	121	9806118	2.3	99	9810110	2.3	96
9801703	5.1	7	9805940	2.5	121	9806119	2.3	98	9810130	2.3	96
9801704	5.1	7	9805941	2.5	121	9806120	2.3	99	9810170	2.3	96
9801859	5.3	52	9805942	2.5	121	9806121	2.3	98	9810220	2.3	96
9805281	5.3	57	9805943	2.5	121	9806122	2.3	99	9810260	2.3	96
9805281	5.1	4	9805944	2.5	121	9806123	2.3	99	9810375	2.3	96
9805281	5.1	8	9805945	2.5	121	9806124	2.3	99	9810400	2.3	96
9805310	2.5	122	9805946	2.5	121	9806125	2.3	99	9810430	2.3	96
9805311	2.5	122	9805947	2.5	121	9806126	2.3	99	9810470	2.3	96
9805312	2.5	122	9805949	2.5	121	9806127	2.3	99	9810520	2.3	96
9805313	2.5	122	9805951	2.5	121	9806128	2.3	99	9810550	2.3	100
9805314	2.5	122	9805955	2.5	121	9806129	2.3	98	9810551	2.3	100
9805405	2.5	123	9805956	2.5	122	9806130	2.3	99	9810560	2.3	96
9805406	2.5	123	9805959	2.5	121	9806131	2.3	99	9811220	2.3	104
9805407	2.5	123	9805960	2.5	122	9806133	2.3	97	9817030	2.3	101
9805408	2.5	123	9805961	2.5	122	9806134	2.3	98	9817031	2.3	101
9805409	2.5	123	9805962	2.5	122	9806135	2.3	98	9817032	2.3	101
9805410	2.5	123	9805963	2.5	122	9806136	2.3	98	9817033	2.3	101
9805411	2.5	123	9805965	2.5	122	9806137	2.3	98	9817034	2.3	101
9805412	2.5	123	9805966	2.5	124	9806138	2.3	98	9817035	2.3	101
9805413	2.5	123	9805974	2.5	124	9806140	2.3	98	9817036	2.3	101
9805414	2.5	123	9805975	2.5	122	9806141	2.3	98	9817037	2.3	101
9805415	2.5	123	9805976	2.5	122	9806142	2.3	98	9817038	2.3	101
9805416	2.5	123	9805977	2.5	122	9806143	2.3	98	9817039	2.3	101
9805431	2.5	213	9805978	2.5	122	9806144	2.3	98	9817040	2.3	101
9805432	2.5	213	9805979	2.5	122	9806145	2.3	98	9817041	2.3	101
9805433	2.5	213	9805980	2.5	122	9806146	2.3	98	9817050	2.3	101
9805434	2.5	213	9805981	2.5	122	9806147	2.3	98	9817060	2.3	102
9805435	2.5	213	9805982	2.5	124	9806148	2.3	98	9817079	2.3	103
9805436	2.5	213	9805985	2.5	122	9806149	2.3	98	9817080	2.3	101
9805437	2.5	213	9805990	2.5	124	9806153	2.3	98	9817083	2.3	101
9805439	2.5	213	9806016	2.3	102	9806154	2.3	100	9817085	2.3	102
9805440	2.5	213	9806024	2.3	102	9806156	2.3	98	9817090	2.3	104
9805441	2.5	213	9806025	2.3	102	9806157	2.3	98	9817091	2.3	104
9805442	2.5	213	9806026	2.3	102	9806158	2.3	98	9817092	2.3	104
9805443	2.5	213	9806032	2.3	102	9806159	2.3	98	9817095	2.3	104
9805444	2.5	213	9806040	2.3	102	9806160	2.3	98	9817107	2.3	102
9805445	2.5	213	9806045	2.3	102	9806161	2.3	98	9817131	2.3	102
9805446	2.5	213	9806059	2.3	102	9806162	2.3	97	9817158	2.3	102
9805447	2.5	213	9806067	2.3	104	9806164	2.3	98	9817159	2.3	102
9805448	2.5	213	9806068	2.3	99	9806165	2.3	98	9817174	2.3	102
9805449	2.5	213	9806069	2.3	99	9806166	2.3	98	9817190	2.3	102
9805450	2.5	213	9806070	2.3	99	9806167	2.3	98	9817200	2.3	101
9805451	2.5	213	9806072	2.3	99	9806168	2.3	97	9817201	2.3	101
9805453	2.5	213	9806073	2.3	99	9806169	2.3	98	9817202	2.3	101
9805454	2.5	213	9806074	2.3	99	9806170	2.3	97	9817203	2.3	101
9805455	2.5	213	9806076	2.3	99	9806171	2.3	98	9817212	2.3	102
9805456	2.5	213	9806079	2.3	97	9806172	2.3	98	9817220	2.3	102
9805457	2.5	213	9806081	2.3	97	9806174	2.3	98	9817250	2.3	102
9805458	2.5	213	9806082	2.3	97	9806175	2.3	98	9817263	2.3	102
9805476	2.5	213	9806083	2.3	97	9806177	2.3	98	9817280	2.3	102
9805477	2.5	213	9806086	2.3	97	9806178	2.3	98	9817300	2.3	101
9805524	2.3	102	9806087	2.3	97	9806179	2.3	98	9817301	2.3	102
9805532	2.3	102	9806088	2.3	97	9806180	2.3	97	9817302	2.3	101
9805540	2.3	102	9806089	2.3	97	9806181	2.3	98	9817303	2.3	101
9805559	2.3	102	9806091	2.3	97	9806182	2.3	98	9817304	2.3	101
9805567	2.3	102	9806092	2.3	97	9806183	2.3	98	9817305	2.3	101
9805575	2.3	102	9806093	2.3	97	9806184	2.3	98	9817306	2.3	101
9805583	2.3	102	9806094	2.3	97	9806185	2.3	99	9817308	2.3	101
9805591	2.5	119	9806095	2.3	97	9806186	2.3	99	9817309	2.3	101
9805702	2.3	108	9806096	2.3	97	9806187	2.3	99	9817310	2.3	101
9805706	2.3	108	9806097	2.3	97	9806188	2.3	99	9817311	2.3	101
9805710	2.3	109	9806099	2.3	97	9806189	2.3	99	9817312	2.3	102
9805711	2.3	109	9806100	2.3	98	9806190	2.3	100	9817328	2.3	102
9805850	5.5	78	9806101	2.3	98	9806191	2.3	100	9817336	2.3	102
9805869	5.5	78	9806102	2.3	98	9806192	2.3	100	9817344	2.3	102
9805888	5.5	78	9806103	2.3	98	9806193	2.3	100	9817352	2.3	102
9805900	2.5	122	9806104	2.3	98	9806197	2.3	97	9817360	2.3	102
9805907	2.5	121	9806105	2.3	97	9806204	2.3	98	9817379	2.3	102
9805908	2.5	121	9806106	2.3	98	9806205	2.3	98	9817387	2.3	102
9805911	2.5	122	9806107	2.3	98	9806208	2.3	98	9817395	2.3	102
9805912	2.5	122	9806108	2.3	98	9806209	2.3	98	9817396	2.3	102

Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica	Broj artikla	poglavlje	stranica
Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page	Art. no.	chapter	page
9817500	2.3	104									
9817501	2.3	103									
9817502	2.3	104									
9817503	2.3	103									
9842000	4.0	4									
9842001	4.0	4									
9842002	4.0	4									
9842003	4.0	4									
9842004	4.0	4									
9842005	4.0	4									
9842006	4.0	4									
9842007	4.0	4									
9842008	4.0	4									
9842009	4.0	4									
9842010	4.0	4									
9842011	4.0	4									
9842012	4.0	4									
9843000	4.0	4									
9843001	4.0	4									
9843002	4.0	4									
9843003	4.0	4									
9843004	4.0	4									
9843005	4.0	4									
9843006	4.0	4									
9843007	4.0	4									
9843008	4.0	4									
9843009	4.0	4									
9843010	4.0	4									
9843011	4.0	4									
9843012	4.0	4									
9844000	4.0	4									
9844001	4.0	4									
9844002	4.0	4									
9844003	4.0	4									
9844004	4.0	4									
9844005	4.0	4									
9844006	4.0	4									
9844007	4.0	4									
9844008	4.0	4									
9844009	4.0	4									
9844010	4.0	4									
9844011	4.0	4									
9844012	4.0	4									

BEOVIĆ

Schlemmer
Our Technology.Your Success.



Our Technology. Your Success.